水泵领先科技

BODAO铂导

WATER PUMP & MOTOR

专注水泵电机制造一百年不到

Focus on pump and motor manufacturing

浙江铂导机电有限公司
台州波导机电有限公司

地址: 浙江省温岭市大溪镇前瓦屿泵业小镇
电话: 0576-86321021 86865888
邮箱: sales@bodaopump-motor.cn
www.cnbdjd.en.alibaba.com

ZHEJIANG BODAO MECHANICAL & ELECTRICAL CO., LTD.

Add: Qianwayu industry zone, Daxi Town, Wenling City, Zhejiang Province, China
Tel: (+86)0576-86321021 (+86)0576-86865888
E-mail: sales@bodaopump-motor.cn
www.cnbdjd.en.alibaba.com

水泵解决方案 WATER PUMP SOLUTION

BODAO铂导
WATER PUMP & MOTOR

Design & Technology

设计 & 技术

浙江铂导机电有限公司座落于中国“水泵之乡”大溪镇，繁华的104国道与交通便利的甬台温高速公路出口处，是集水泵科研，设计，生产、销售于一体的专业生产厂家。
公司创建十几年来，始终致力于科技和管理的创新，开发出适用于工矿企业、建筑工地、城市供水、农田排灌、石油化工、高层建筑消防供水、工业水处理、污水处理和纯净水、制药行业、锅炉、空调供暖等各行业的用泵。

公司的主导产品SPP系列泳池泵，HJS系列屏蔽管道泵。QY系列油浸式普通矿用潜水泵，WQ、WQD、WQK系列污水排污泵，QY系列油浸式潜水泵，SG、SGR系列管道离心泵，QD、Q系列小型多级潜水泵，QDX、QX系列小型潜水泵，WZB系列旋涡式自吸泵、JET系列自吸喷射泵，以及WZB系列家用管道泵的主要性能指标完全达到国际同等先进水平。
展望未来，公司将继续保持和发扬以振兴民族工业，以产业报国的精神，志存高远，本着“质量第一”、“服务第一”、的经营方针，以“客户满意”为目标，为广大客户提供更好的产品和更贴心的服务。

ZHEJIANG BODAO MECHANICAL & ELECTRICAL CO., LTD. is located in Pump Industry Zone, well known as “town of pump industry”. We are professional manufacturer specialized in research, design, production and sale, Since its establishment more than ten years, the company has devoted considerable efforts to make innova–tion of technology and management and have successfully developed various kinds of pumps which are applicable to industrial and mining enterprises, municipal water supply, farming irrigation, petroleum chemical engineering, domestic water and water supply of high rises, industrial water treatment, water purification, pharma–cy industrial, boiler and air condition system etc.

The main products of us are: SPP series swimming pool pump HJS series shielding pipeline pumps. CR series stainless QY series oil immersed common submersible pumps for mining, WQ, WQD, WQK series sewage pumps, QY series oil immersed submersible pumps. QD, Q series mini type submersible pumps, QDX, QX series mini type submersible pumps, WZB series self–suction pumps, JET series self–suction jet pumps, WZB series home use pipeline pumps have fully achieved the international advanced standard in most perfor–mance index.
We’ll keep improving our products and service for domestic and abroad clients with “Best Quality”, “Best Credit” and “Best Service” in the future to win your satisfaction in all aspects.

In response to the increasingly fierce global comptition, each of BODAO people should consciously integrate into the interna-tional stage, adhere to innovation, continue to provide users with leading products and services, which is the key to winning the market.

可媲美欧洲、日本产水泵

重拾匠心精神，还原重现水泵最好的设计。

Comparable to European and Japanese water pumps,

regain the spirit of ingenuity and restore the best design of water pumps.

We Are Professional Manufacturer In Pumps

VARIABLE-FREQUENCY
PERMANENT MAGNETIC CIRCULATING POOL PUMP
游泳池循环过滤变频电泵

SPP SEREIS

VARIABLE-FREQUENCY PERMANENT MAGNETIC CIRCULATION POOL PUMP

智能变频永磁游泳池泵

游泳池泵专用304不锈钢
5微米(μm)过滤器

5 μm Stainless steel filter for swimming pool pump

游泳池泵专用304不锈钢石英
管紫外线杀菌消毒器

Stainless steel quartz tube ultraviolet sterilizer for swimming pool pump

紫外线消毒器安装注意事项

1.收到货时，如果套管已安装好，检查套管是否损坏，若没有损坏可直插灯管使用。

2.螺帽不要拧太紧,不漏水即可，避免把套管挤碎。

3.请勿频繁开关，电压不稳会减少灯管寿命，严重时会烧掉灯管。

4.配电箱要防雨、防潮、防水，避免设备损坏。

5.通水运行前先检查两端不得漏水，石英管内壁也不得有水珠。

6.灯角插座应按号或按颜色插入。

7.接地保护。

PRODUCT

TRANSPARENT DIAGRAM

产品透视图

SPP

智能变频永磁游泳池泵

Variable-frequency permanent magnetic cirulation pool pump

变频器

采用最新稀土磁钢材质作为机芯的转子，通过变频器，把原本的交流电转换成直流电，随意控制电机的转速，最高达到5000转每分钟。

Frequency Converter

It adopts rare earth magnet as the rotor inside the motor, turning the alternating current into direct current to control the motor speed optionally by the frequency converter. The max speed can be 5000 revolutions per minute.

稀土磁铁

由于稀土永磁材料的磁性能优异，它经过充磁后不再需要外加能量就能建立很强的永久磁场，用来替代传统电机的电励磁场所制成的稀土永磁电机不仅效率高，而且结构简单、运行可靠，还可做到体积小、重量轻。

Rare Earth Magnets

The excellent property of rare earth permanent magnet makes a strong permanent magnetic field after being magnetized without the additional energy. This kind of rare earth permanent magnetic motor used to replacing the traditional motor is not only of high efficiency, but also simple structure, reliable operation, small volume and light weight.

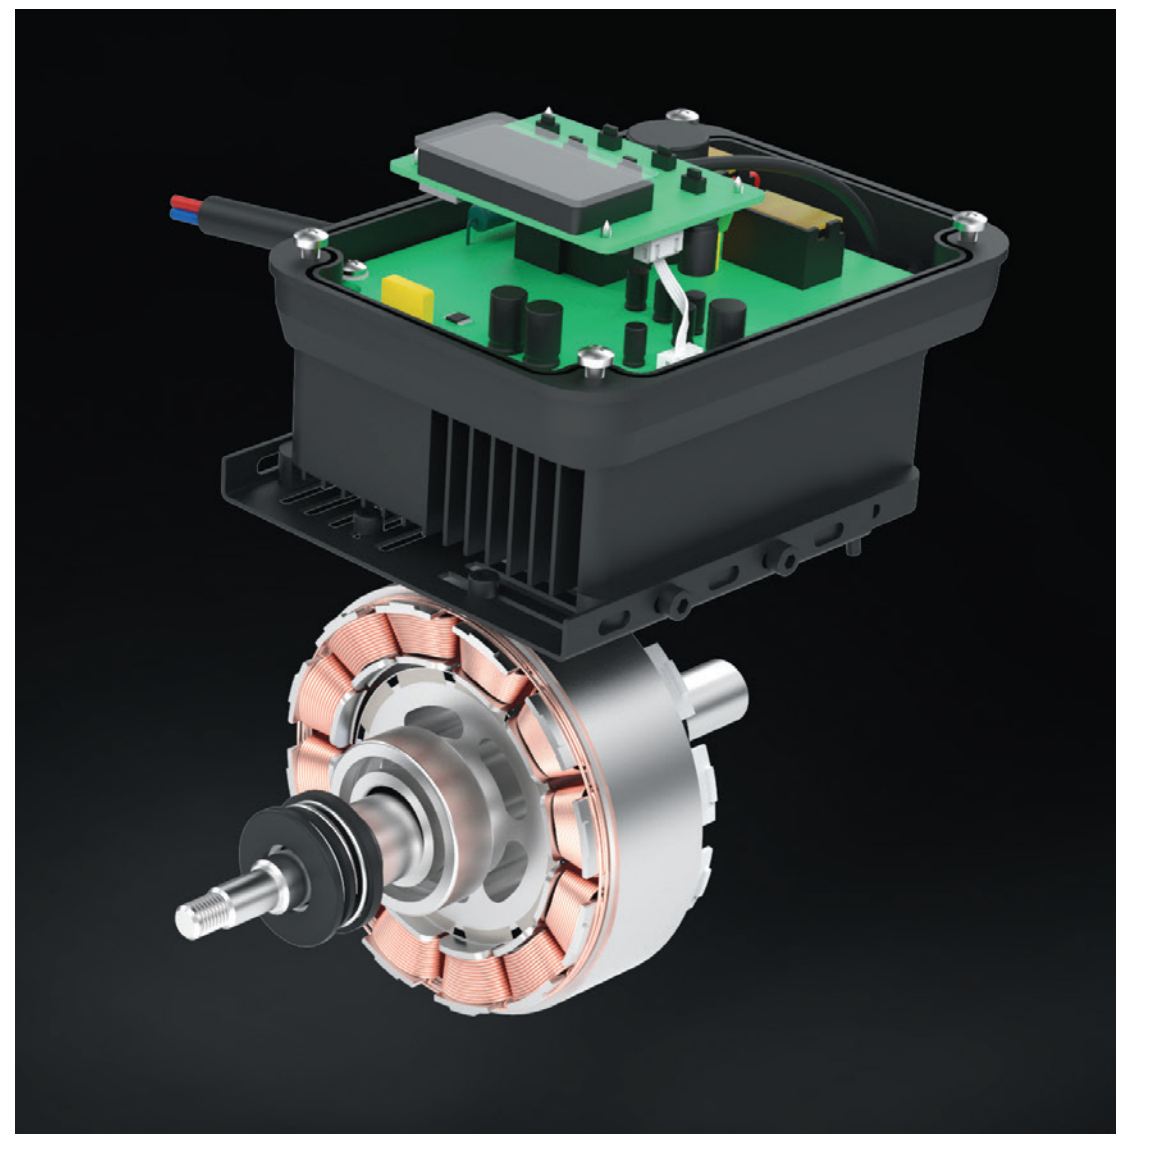

智能变频永磁游泳池泵

SPP sereis Variable–frequency permanent magnetic circulation pool pump

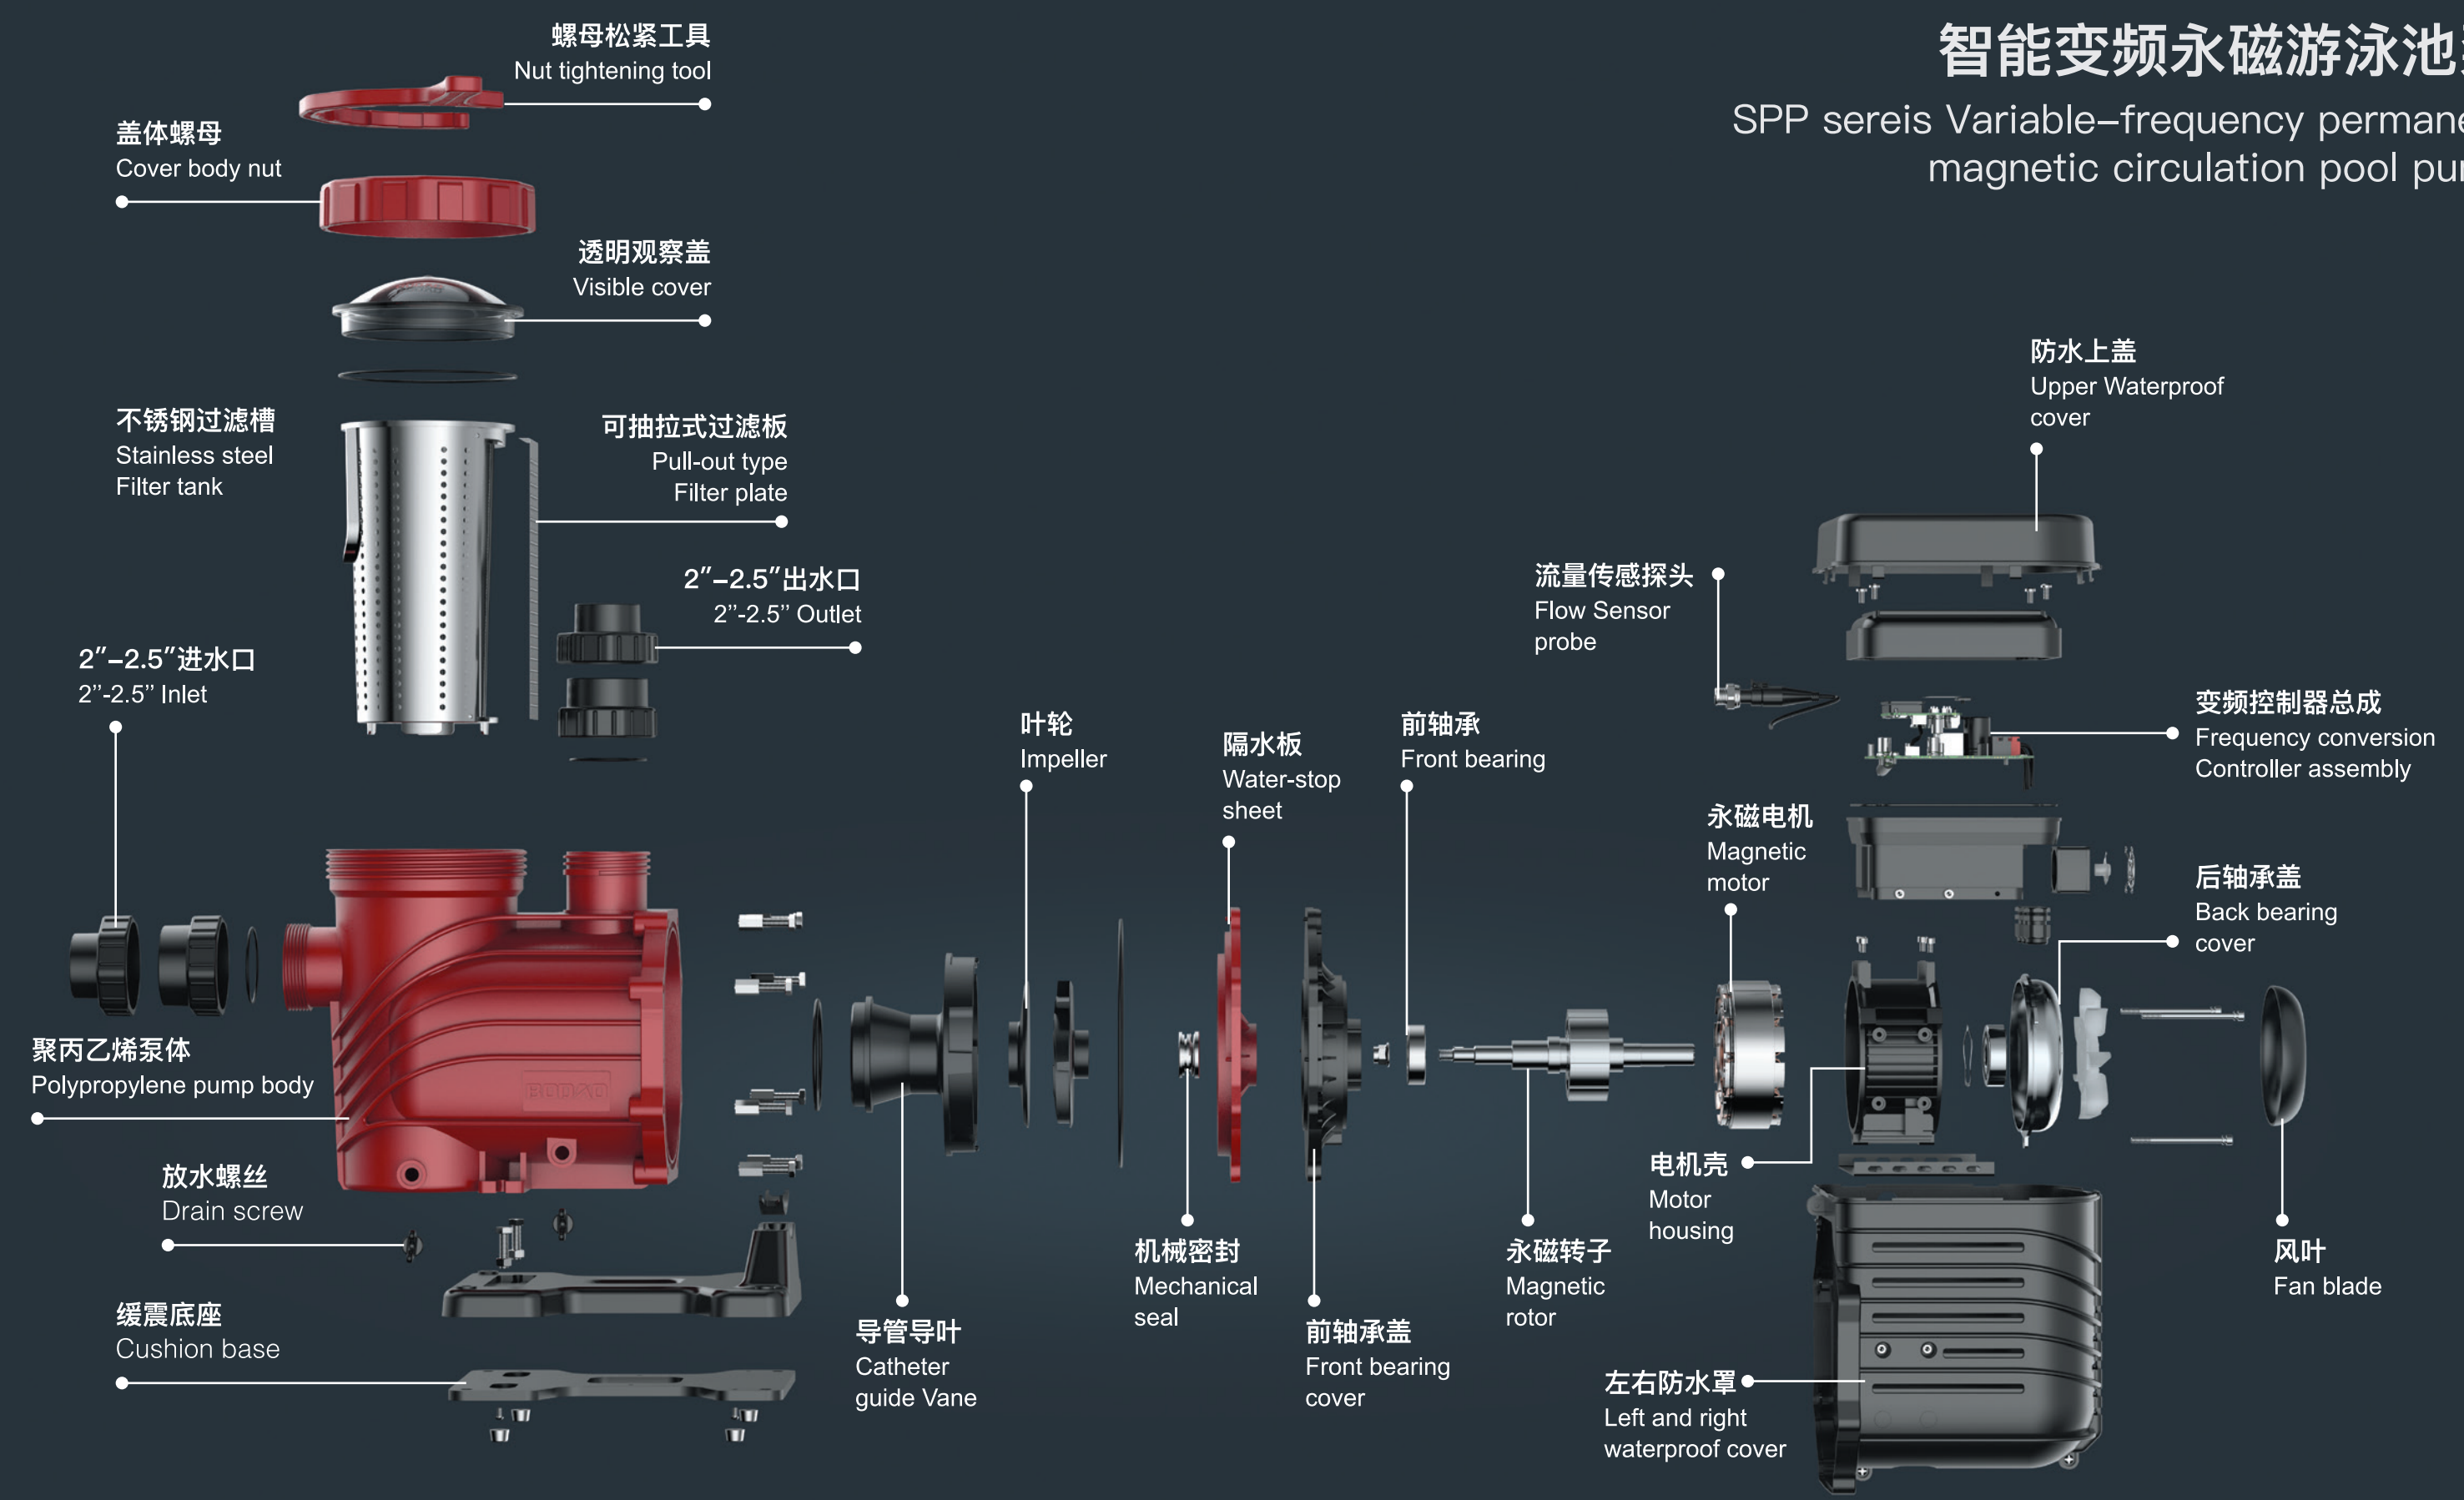

普通电机泳池泵

SPP series swimming pool pump

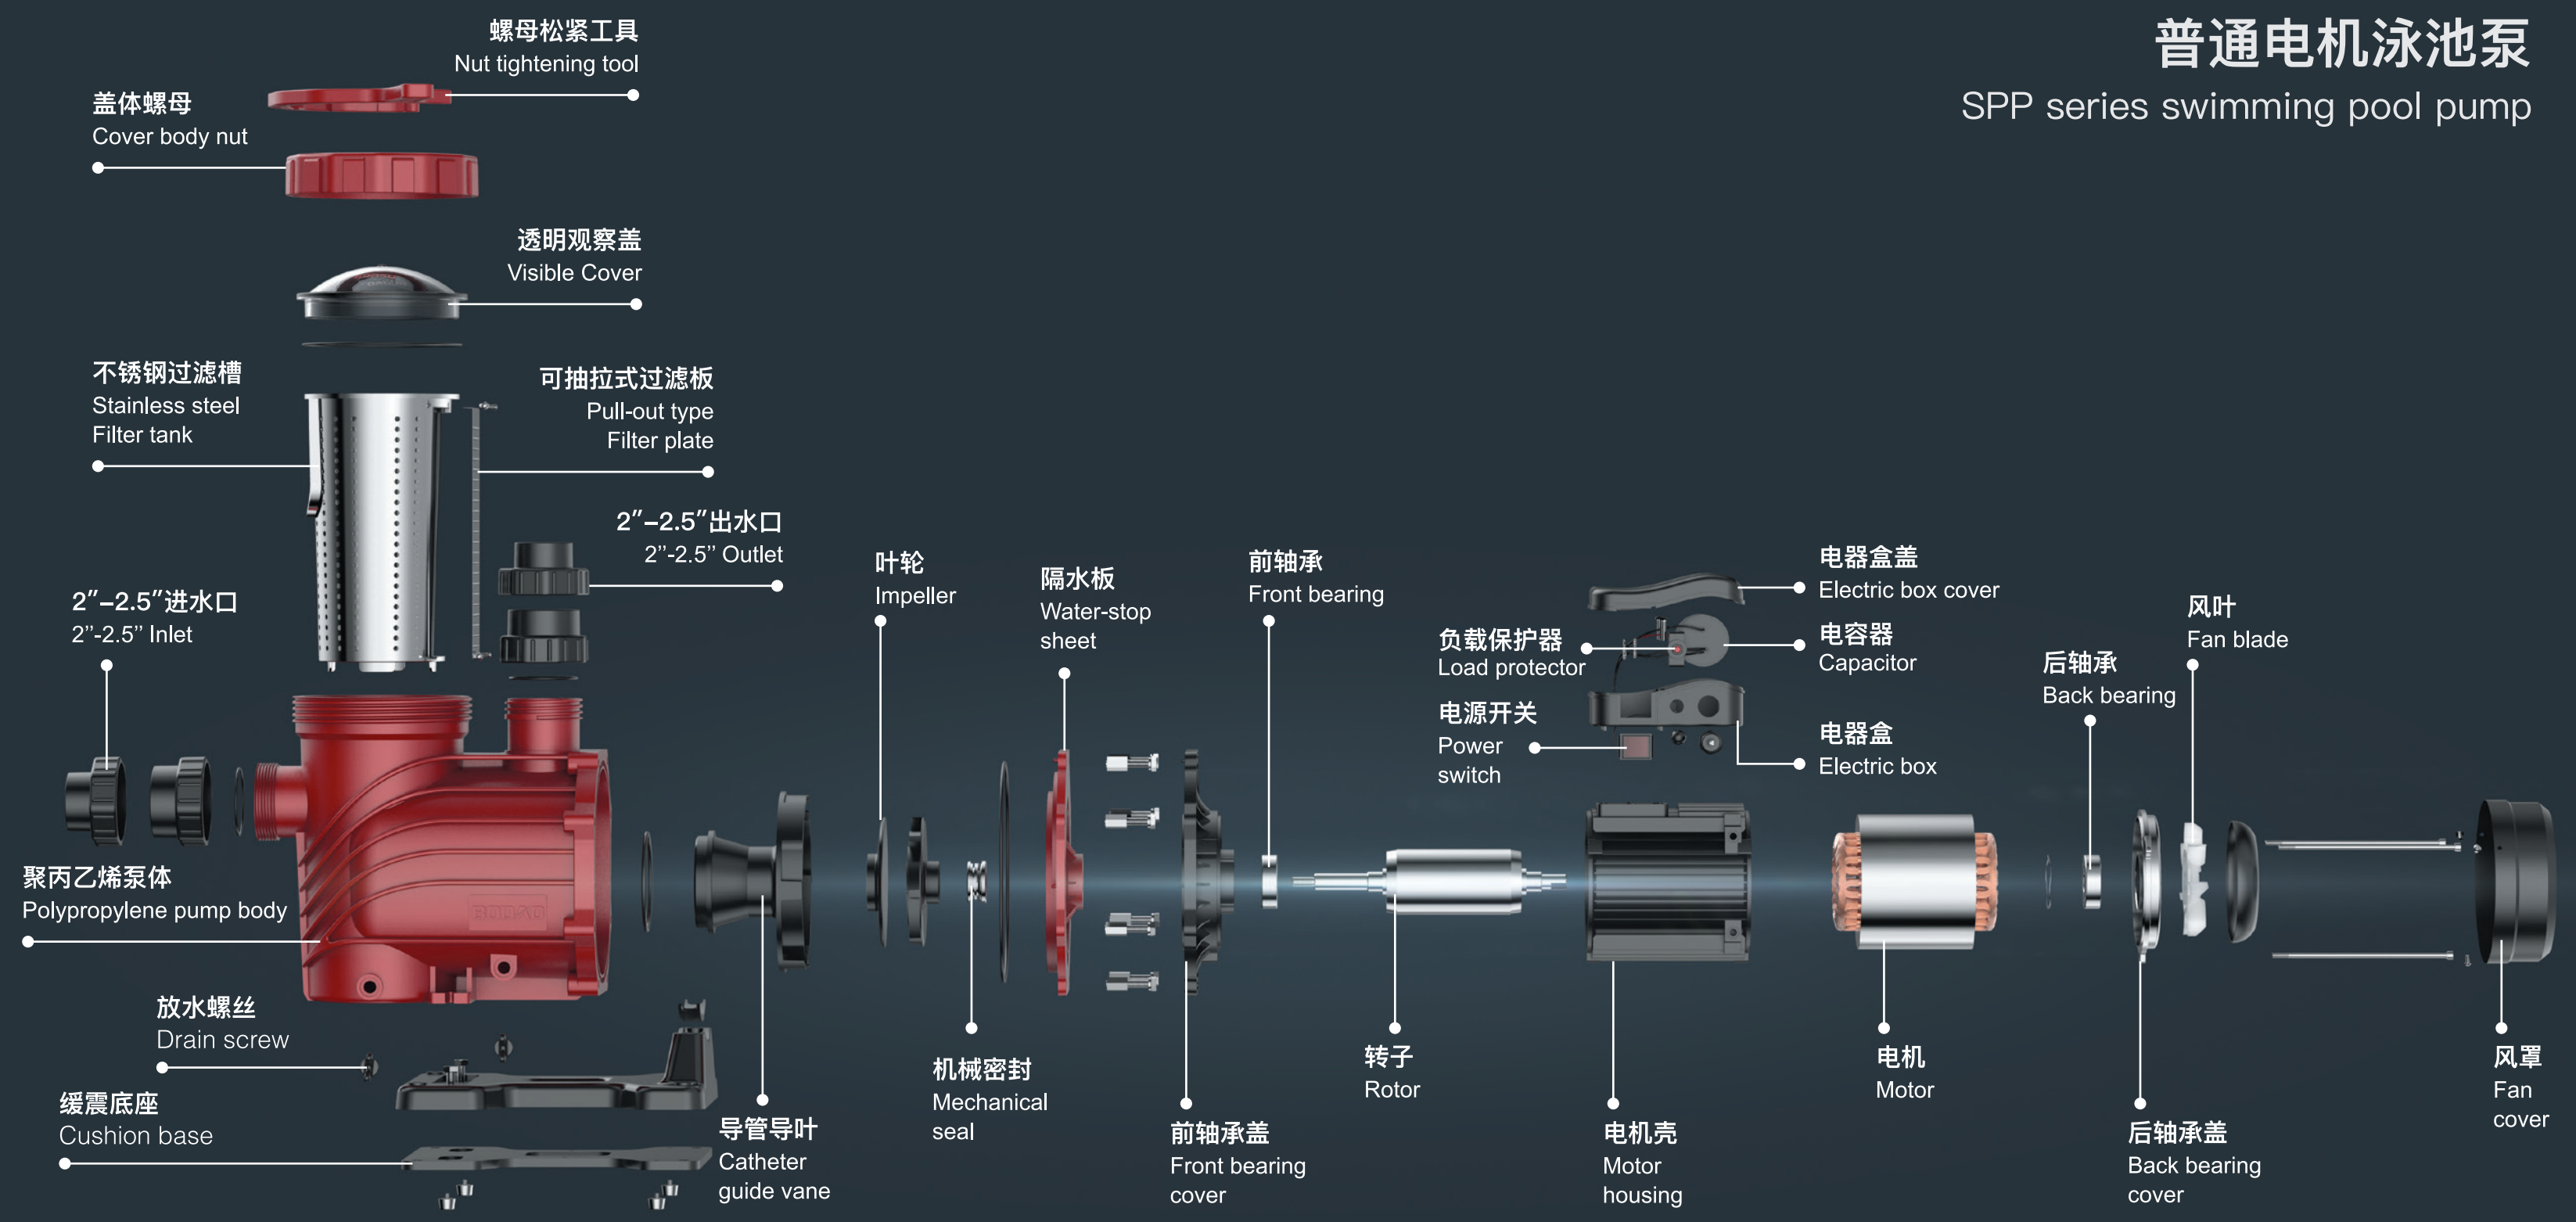

SPP

普通电机泳池泵

SERIES SWIMMING POOL PUMP

采用大孔机芯，铜线比一般机芯多30%，效率更高，性能更强。
泵体采用GF35高玻璃纤维聚丙乙烯材质，抗性强，化学物质稳定。具有高强度，耐高温，耐酸碱的特性。
前段垃圾收集器采用304不锈钢材质，便拆卸结构设计，清理更方便、更彻底。

Using the large slot, and the copper wire inside the motor is 30% more than the general one, with higher efficiency and better performance.
The pump body adopts GF35 Fiber polypropylene material, which has strong resistance and stable chemical substances. It has the advantages of High strength, High temperature resistance, acid and alkali resistance.
The filter is made of 304 stainless steel material, can be disassembled, conveniently and cleaned more thoroughly.

功能介绍
FEATURES INTRODUCTION

- 游泳池循环过滤变频永磁电泵
- 采用最新稀土磁钢材质作为机芯的转子，通过变频器，把原本的交流电转换成直流电，随意控制电机的转速，最高达到5000转每分钟。
- 永磁机芯的长度只有一般普通交流电机的3/1长度，耗电量也减少2/1以上，节能环保。
- 变频器还可人工设定压力，设定好压力后将自动启停，提高便捷度。
- 泵体材质特性：采用GF35高玻璃纤维聚丙乙烯材料。抗性强，化学物质稳定。具有高强度、耐高温、耐酸碱。安全环保耐用。
- 各种家用、商用游泳池，温泉，景观鱼池，水族馆等需要过滤循环的环境。

- Name: variable-frequency permanent magnetic circulating filter pool pump
- Theory: It adopts rare earth magnet as the rotor inside the motor, turning the alternating current into direct current to control the motor speed optionally by the frequency converter. The max speed can be 5000 revolutions per minute.
- About permanent magnet motor:
  1). The length is 1/3 of the normal motor
  2). The power consumption reduces to half.
- About the frequency converter: It can set the pressure manually. After setting the pressure, it will start or stop automatically which makes the whole process more convenient.
- Material properties of pump body: GF35 Fiber polypropylene material.
- Advantage:
  1). High strength performance
  2). Stable chemical substances
  3). High temperature resistance
  4). Acid and alkali resistance
  5). Security and environmental protection
- Application: The place where needs the filter circulation system such as house-using, business swimming pool, fountain, fishpond and aquarium.

详细参数
PARAMETER

SPP-550	功率Power: 0.75HP 扬程Max.Head: 12m 流量Max.Flow: 22m³/h 口径Outlet: 40–50mm 电压Voltage: 220–380V	**SPP-750**	功率Power: 1HP 扬程Max.Head: 16m 流量Max.Flow: 25m³/h 口径Outlet: 40–50mm 电压Voltage: 220–380V	**SPP-1100**	功率Power: 1.5HP 扬程Max.Head: 18m 流量Max.Flow: 28m³/h 口径Outlet: 40–50mm 电压Voltage: 220–380V
SPP-1800	功率Power: 2.5HP 扬程Max.Head: 18m 流量Max.Flow: 35m³/h 口径Outlet: 50–63mm 电压Voltage: 220–380V	**SPP-2200**	功率Power: 3HP 扬程Max.Head: 22m 流量Max.Flow: 40m³/h 口径Outlet: 50–63mm 电压Voltage: 220–380V	**SPP-3000**	功率Power: 4HP 扬程Max.Head: 22m 流量Max.Flow 45m³/h 口径Outlet: 50–63mm 电压Voltage: 380V
SPP(FC)-1100	功率Power: 0.5–1.5HP 扬程Max.Head: 22m 流量Max.Flow: 30m³/h 口径Outlet: 40–50mm 电压Voltage: 220V	**SPP(FC)-2500**	功率Power: 1–3HP 扬程Max.Head: 25m 流量Max.Flow: 45m³/h 口径Outlet: 50–63mm 电压Voltage: 220V	**SPP(FC)-3000**	功率Power: 2–4HP 扬程Max.Head: 30m 流量Max.Flow: 48m³/h 口径Outlet: 50–63mm 电压Voltage: 380V

QDX/QX

SUBMERSIBLE PUMP SERIES

潜水电泵系列

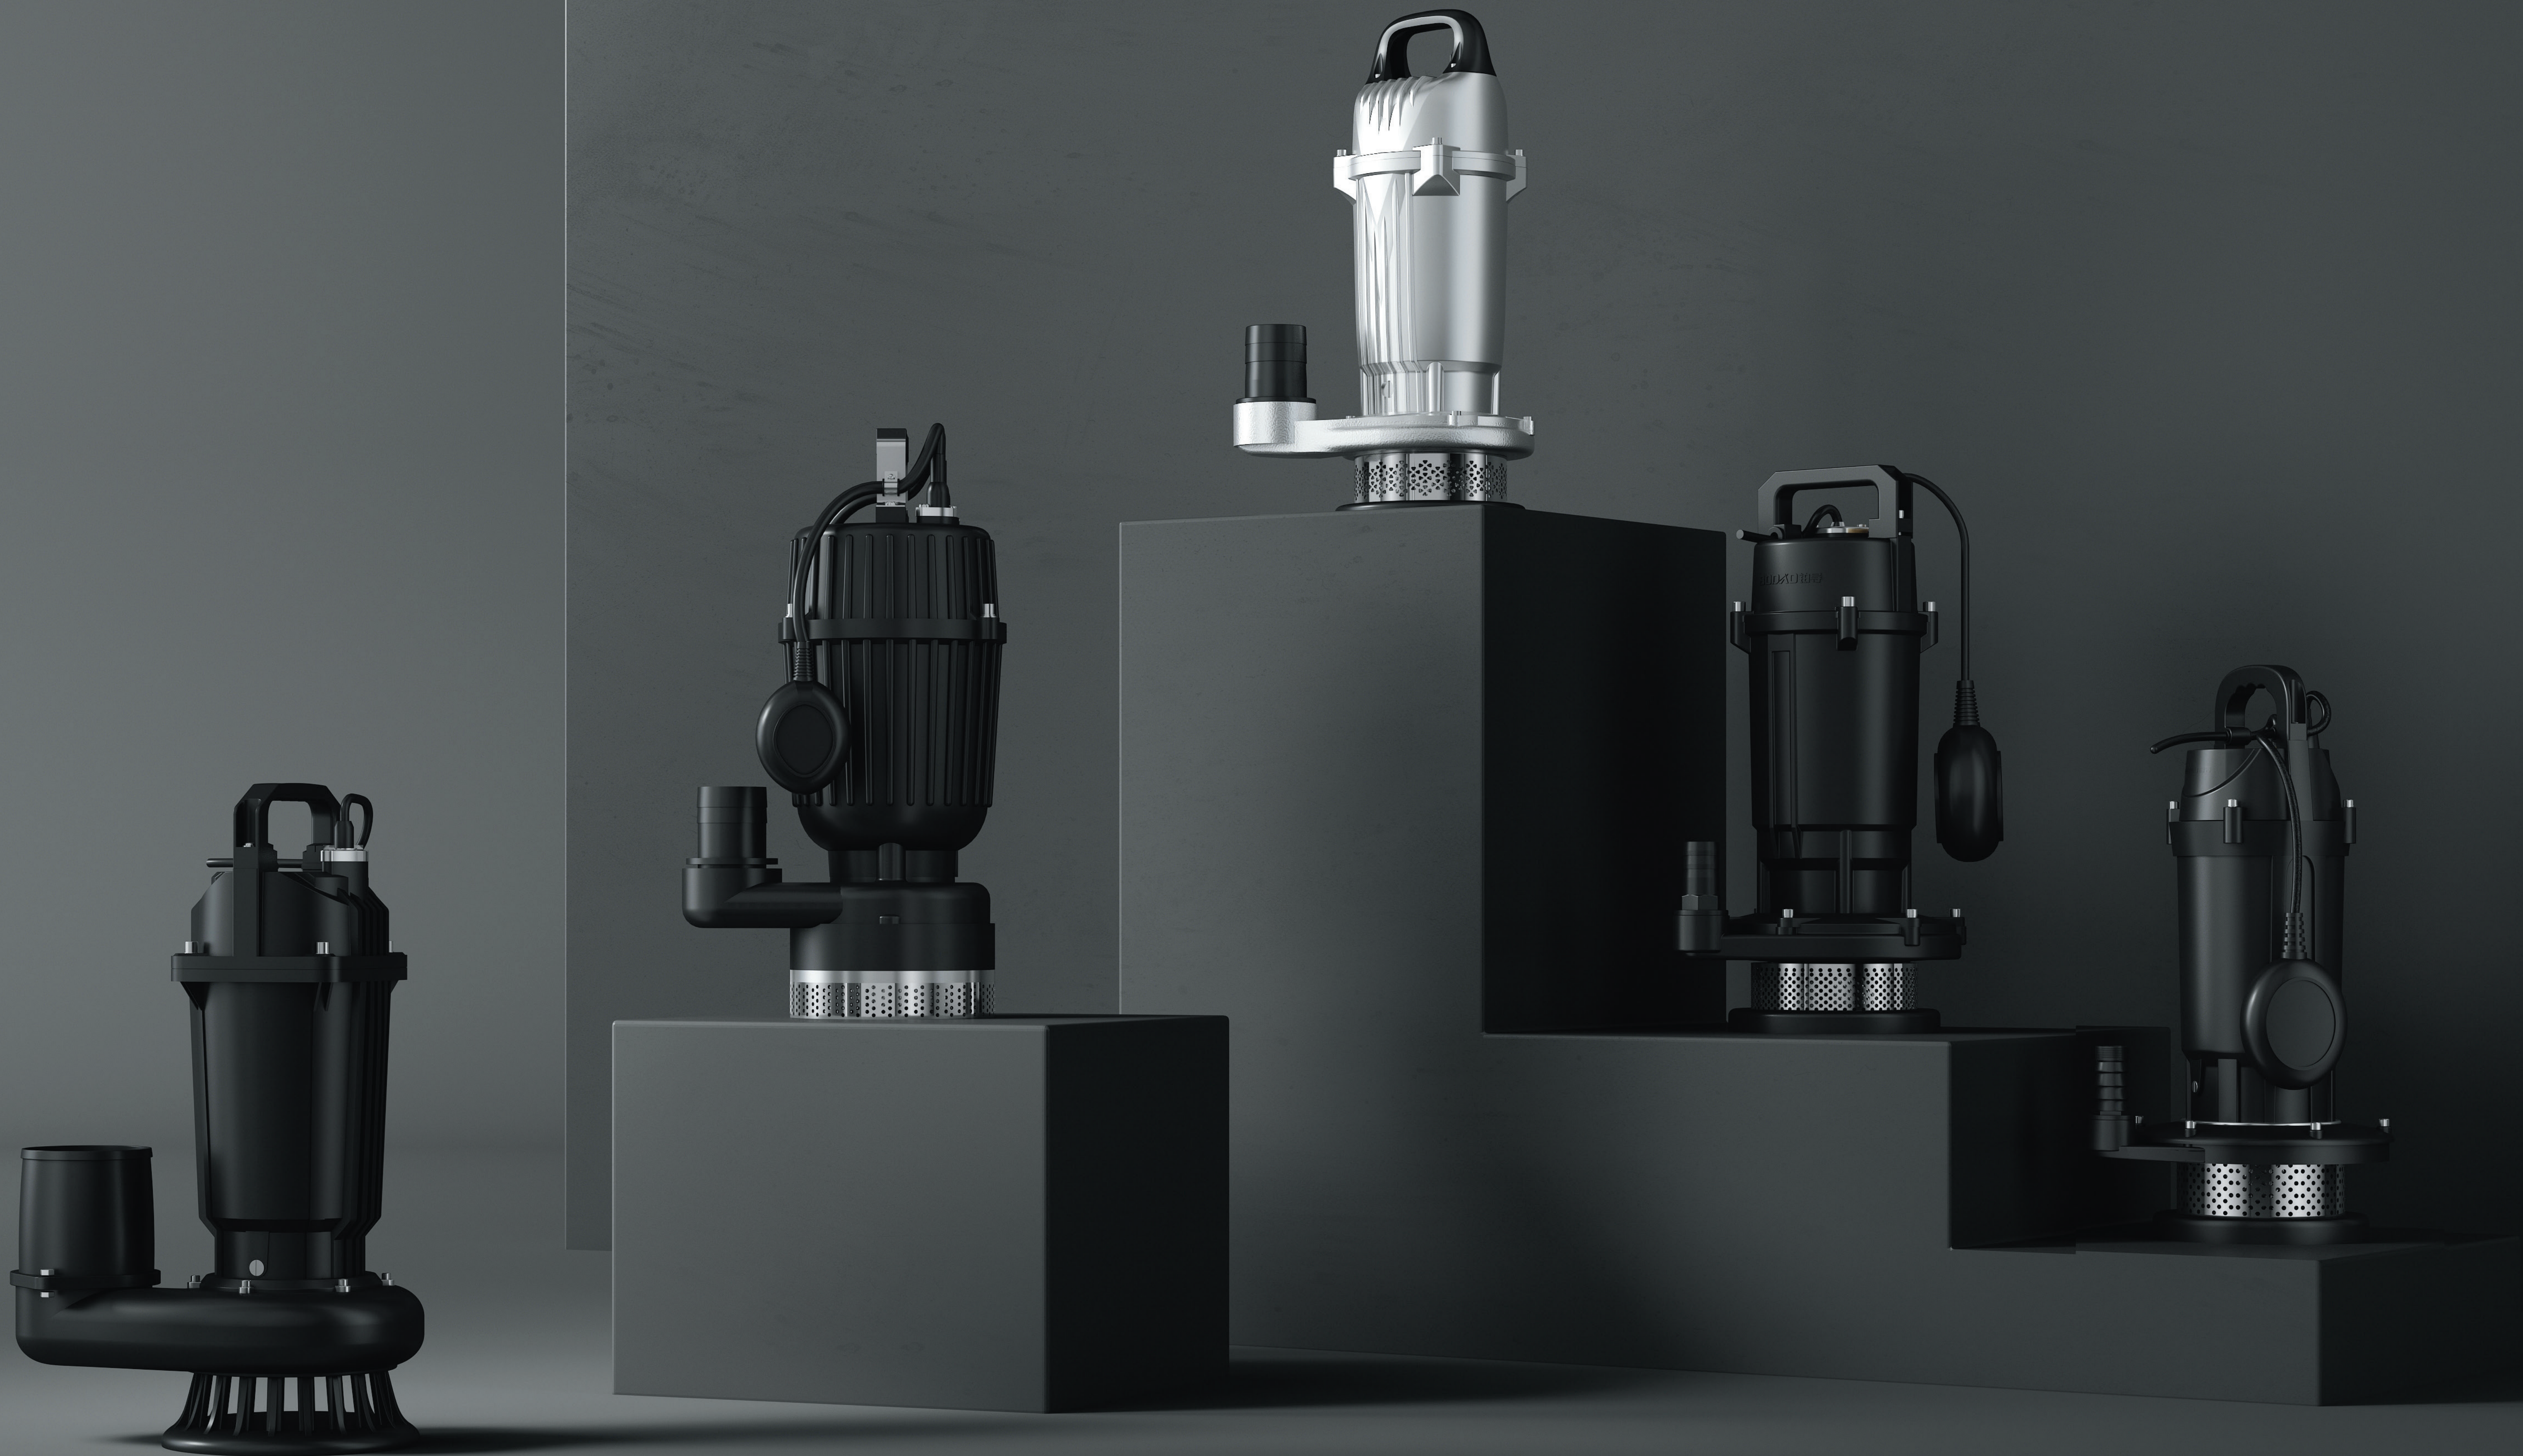

THE REDESIGNED RUNNER SYSTEM AND IMPELLER IMPROVED THE LOW EFFICIENCY AND HIGH ENERGY.

It Increased the efficiency of the whole machine by **20%–35%**. Every degree of Power input exerts the greatest efficiency. Energy–saving，high–efficiency motor with 304 stainless steel impeller and chromium–plated pump body makes the pump durable for ten years.

重新设计的流体力学流道与叶片，改进原有潜水泵低效率、高能耗，使整机效率提高20%–35%。让每一度输入的电力发挥出最大的功效。节能高效电机组配合304不锈钢叶轮和镀镍工艺泵体，使泵体耐用十年。

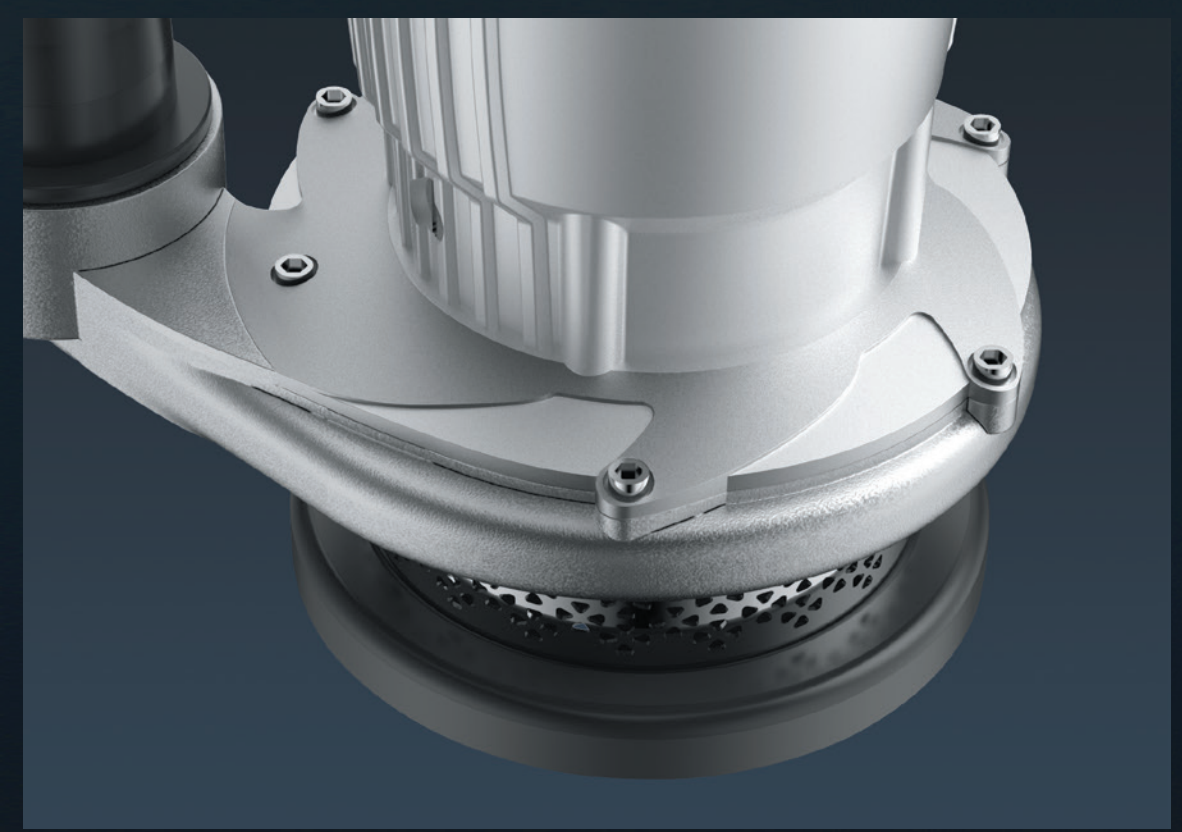

QDX MAX 铝壳潜水泵

QDX-0.37MAX	频率Frequency: 50Hz/60Hz 口径Outlet: 25mm
QDX-750MAX	频率Frequency: 50Hz/60Hz 口径Outlet: 25/40/50/63/80mm

QDX-1100MAX	频率Frequency: 50Hz/60Hz 口径Outlet: 25/40/50/63/80/100mm
QDX-1500MAX	频率Frequency: 50Hz/60Hz 口径Outlet: 80–10mm

QDX MAX

SUBMERSIBLE PUMP

USAGE
SCENARIOS
使用场景

全铜电机
100%
Copper coil

不锈钢叶轮
Stainless
steel impeller

安全电压
Safety
voltage

节能省电
Energy
saving

主要用途

该系列电泵由于体积小、重量轻、特别适用于广大农村井下抽水、农田排灌、园林浇灌、家庭生活用水，也可以用于排除工业积水、建筑施工给排水及养殖业等场所。

Application

QDX MAX serises pump is a small size and light weight new design, this series is especially applicable to underground pumping in the vast rural areas, farmland irrigation, garden irrigation, household water, and can also be used to remove industrial water, construction water supply , drainage and aquaculture.

QDX(F)

潜水电泵系列

QDX(F) SUBMERSIBLE PUMP

PRODUCT

TRANSPARENT DIAGRAM

产品透视图

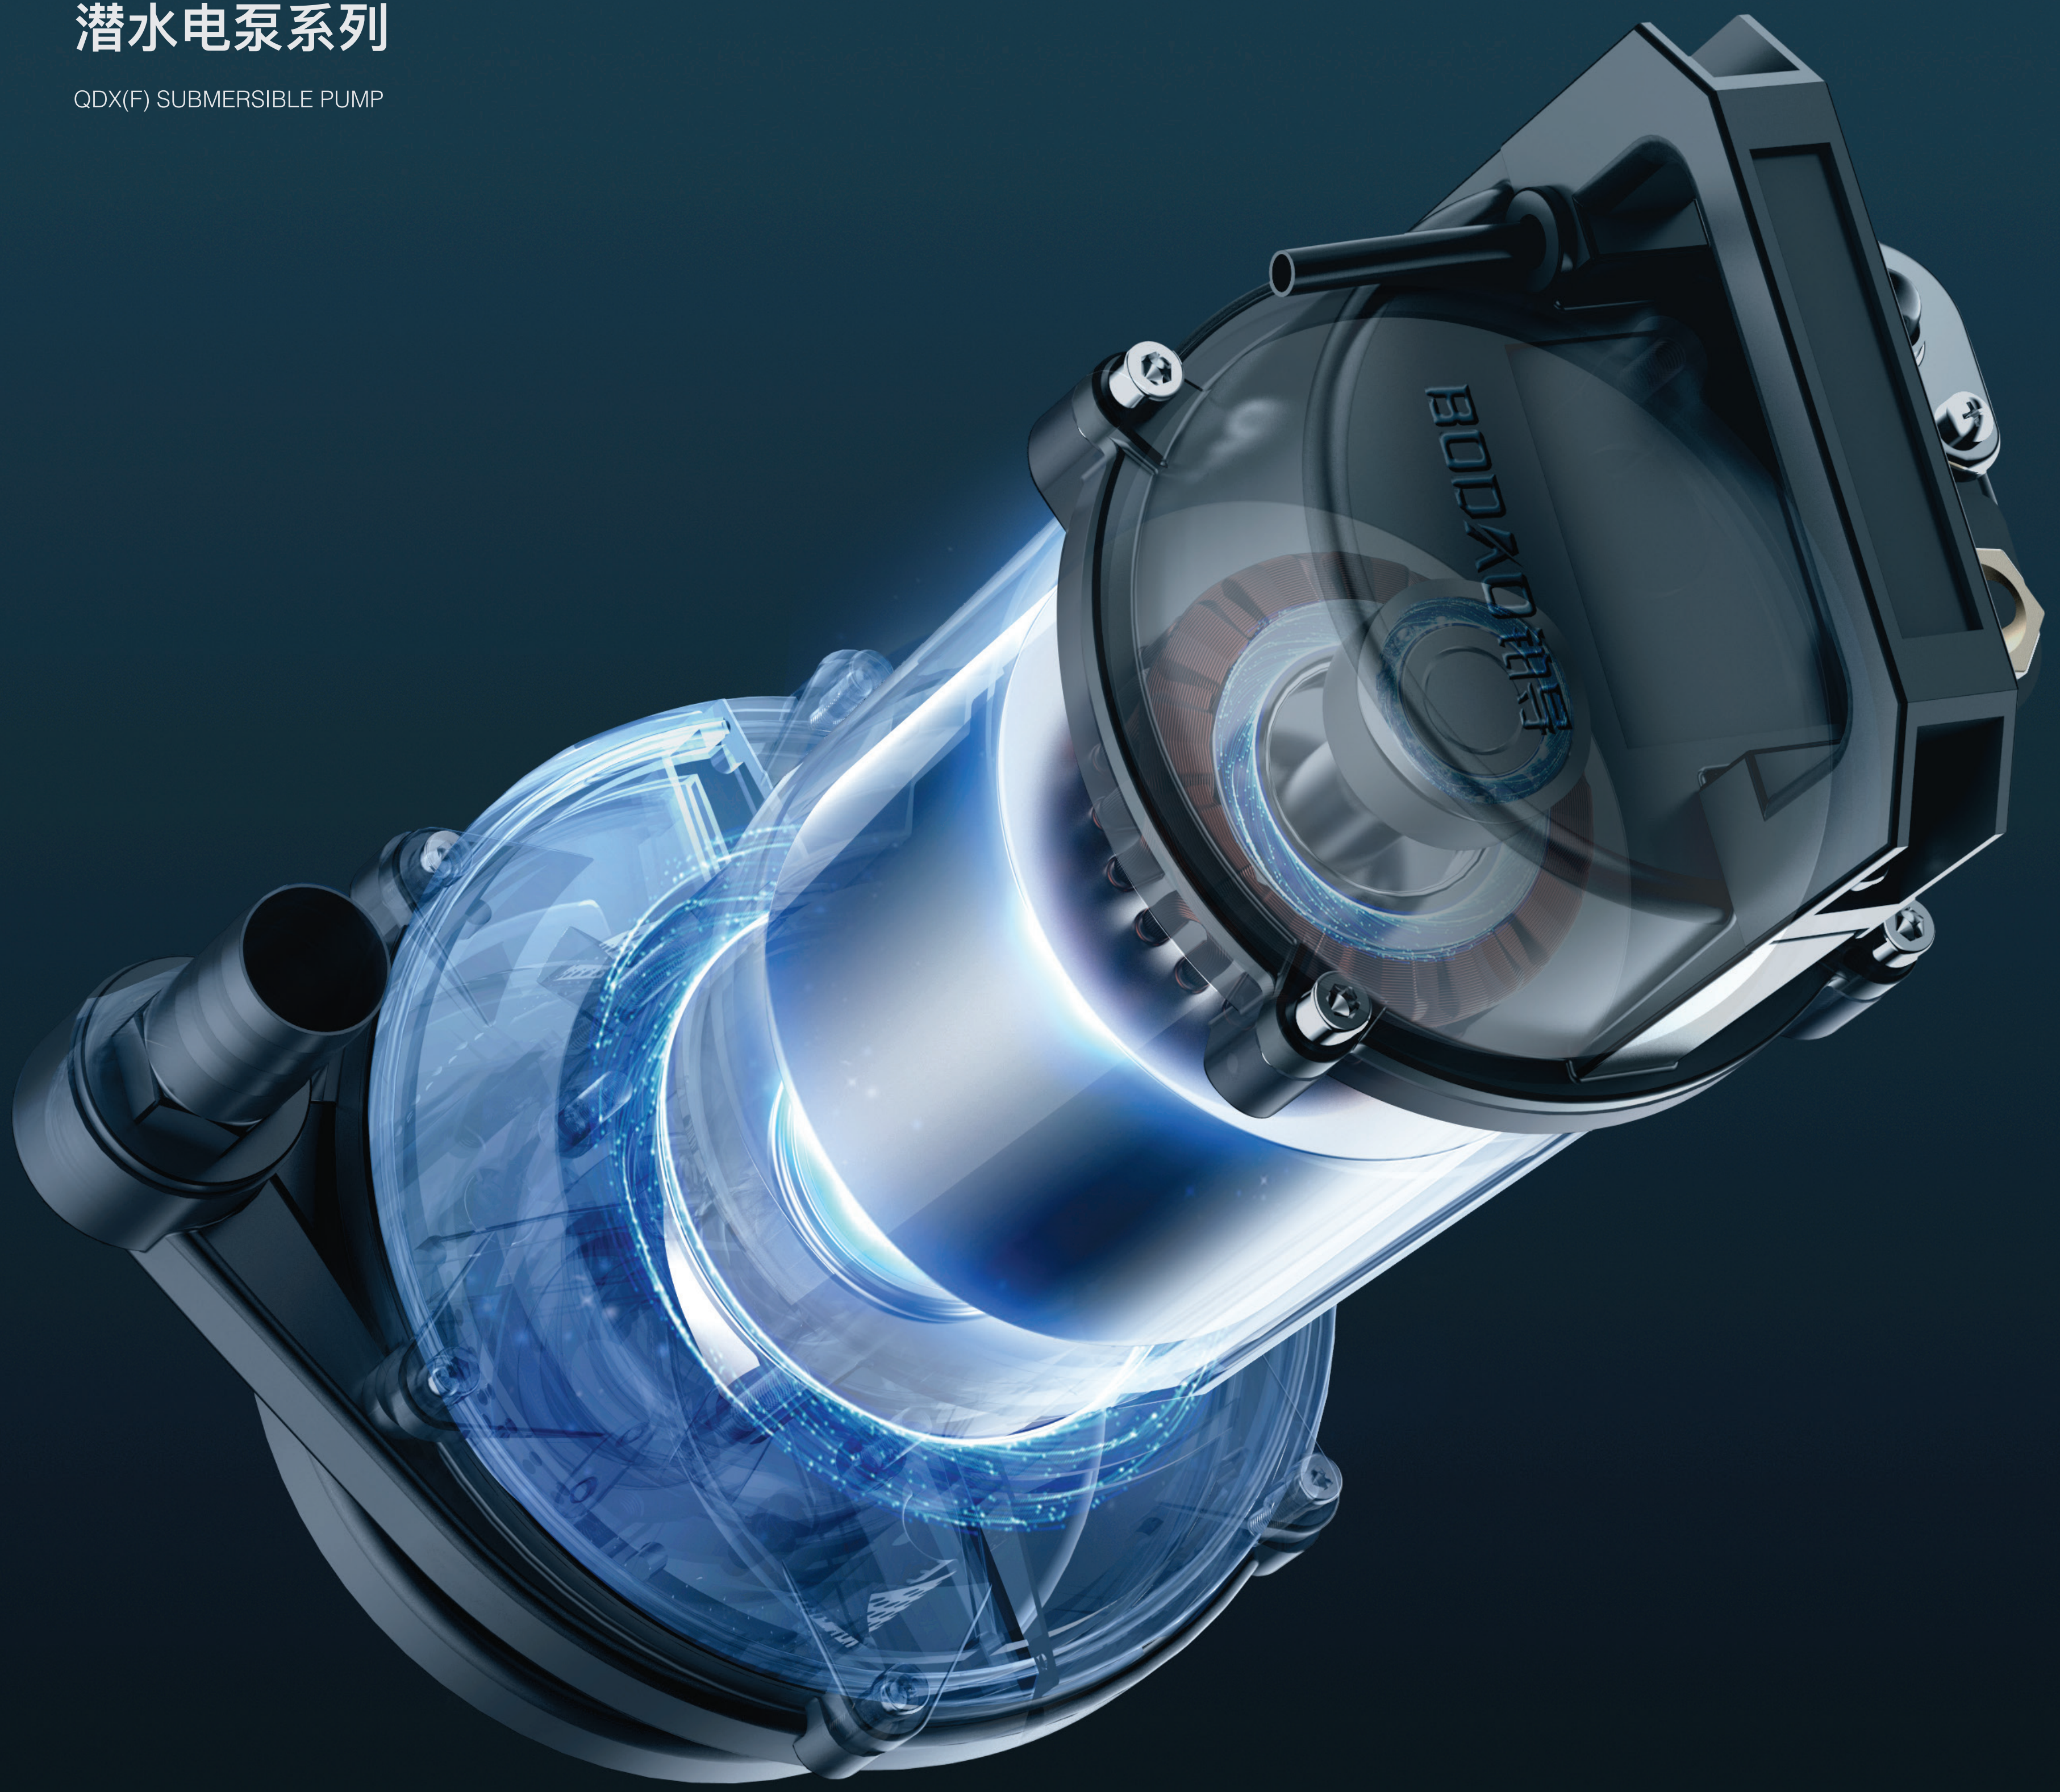

Pump

Max.immersion depth: 5m

Max.liquid temperature: +40℃

Fluid temperature up to: +35 ℃

Cast Iron Pump Body

Aluminum Impeller

8m Cable Length

Double sealing structure

The static ring press plate form

Motor

Copper winding

Single Phase/Continuous Work

Motor Housing: Aluminum

Built-in thermal protector

Shaft: Stainless steel welded shaft/45# steel shaft

Insulation Class: B or F

Protection class: IPX8

Cable cap cover with epoxy sealant

Application

QDX series vertical submersible pumps are fitted witn an open or closed impeller, and are suitable for water cluster boxes, farmland, industrial & mining enterprises, construction sites, ship and family,and characterized by less volume, light weight and convenient operation etc.

主要用途

QDX系列立式潜水泵安装在开式或闭式叶轮上，适用于集水箱，农田，工矿企业，建筑工地，船舶和家庭，其特点是体积小，重量轻，操作方便等。

PRODUCT

BREAKDOWN DIAGRAM

产品分解图

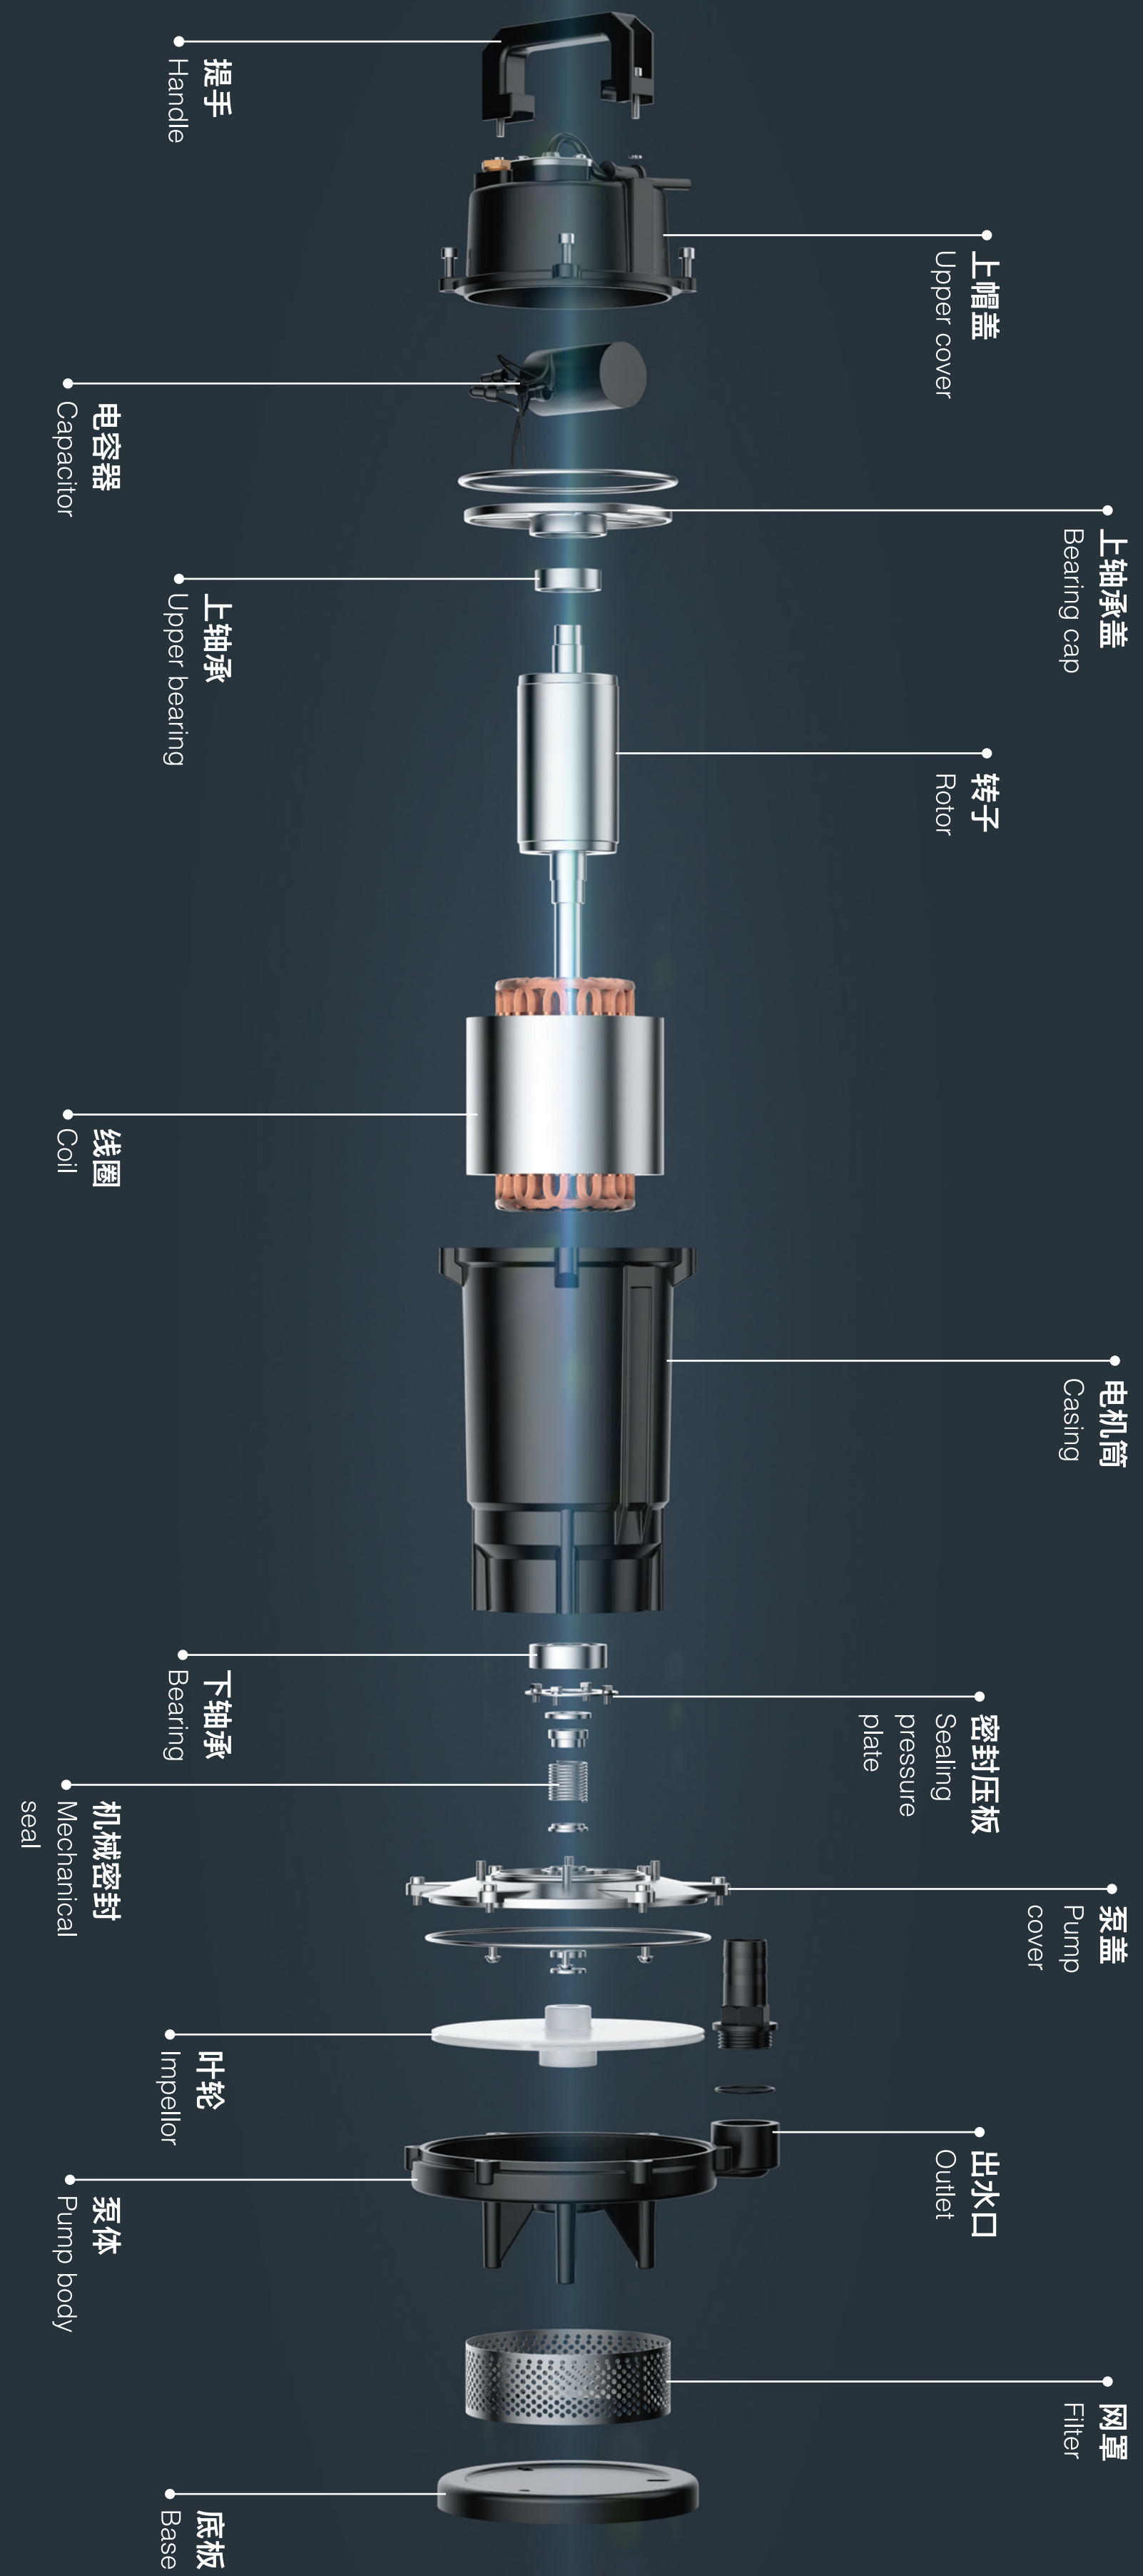

QDX(F)

SUBMERSIBLE PUMP

铝壳潜水泵

QDX6-28/2-1.1(F)

功率Power: 1.1kW
扬程Max.Head: 28m
流量Max.Flow: 6m³/h
口径Outlet: 40mm
频率Frequency: 50Hz/60Hz







Application

Small submersible pumps are consisted with pump, seal and motor. This serie is used two sets of high quality mechanical seal, which is good sealing property, and good waterproof structure. These pums are the new product with well-designed, novel and attractive appearance.

小型潜水泵由泵，密封和电机组成。该系列采用两套高质量的机械密封，具有良好的密封性和良好的防水结构。这些泵是设计新颖，外观新颖，外形美观的新产品。

Motor

Copper winding
Single Phase/Continuous Work
Motor Housing: Aluminum
Built-in thermal protector
Shaft: Stainless steel welded shaft/45# steel shaft
Insulation class: B or F
Protection class: IPx8
Cable cap cover with epoxy sealant
Adopts oil-filled type structure

Pump

Max.immersion depth: 5m
Max.liquid temperature: +40℃
Fluid temperature up to: +35℃
Cast Iron Pump Body
Aluminum Impeller
8m Cable Length
Double sealing structure
The static ring press plate form

QDX(F)

SUBMERSIBLE PUMP



QDX(F) 铝壳潜水泵

QDX(F)1.5-16-0.37
功率Power: 0.37kW
扬程Max.Head: 18m
流量Max.Flow: 5m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDX(F)3-20-0.55
功率Power: 0.55kW
扬程Max.Head: 21m
流量Max.Flow: 6m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDX(F)1.5-32-0.75
功率Power: 0.75kW
扬程Max.Head: 34m
流量Max.Flow: 8m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDX(F)10-16-0.75
功率Power: 0.75kW
扬程Max.Head: 18m
流量Max.Flow: 20m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QDX(F)3-40-1.1
功率Power: 1.1kW
扬程Max.Head: 40m
流量Max.Flow: 8m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDX(F)15-18-1.1
功率Power: 1.1kW
扬程Max.Head: 20m
流量Max.Flow: 25m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QDX(F)45-7-1.5
功率Power: 1.5kW
扬程Max.Head: 7m
流量Max.Flow: 45m³/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QDX(F)55-7-1.8
功率Power: 1.8kW
扬程Max.Head: 7m
流量Max.Flow: 55m³/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QDX(F)65-9-2.2
功率Power: 2.2kW
扬程Max.Head: 9m
流量Max.Flow: 65m³/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

304全不锈钢污水型
304 stainless steel sewage pump

304全不锈钢清水型
304 stainless steel submersible pump

Description

QDX-G and QX-G type stainless steel submersible pump (hereinafter referred to as electric pump) is combined with three parts: pump,seal and motor.Motor can be produced with single-phase or three-phase.This series have an exquisite appearance which could both made of precision casting and stainless steel casing, anti-rust,corrosion resistant, no pollution and etc. Adopt advanced mechanical seal structure between pump and motor. High-quality rubber materials for both seal and cable, protected for the safety and healthy.
This series of pumps are with A and B two models, Type A is stainless steel stretch forming structure and type B is precision casting structure.

304全不锈钢

WQDS(F)4-6-0.37
功率Power: 3kW
扬程Max.Head: 26m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

WQDS(F)6-8-0.55
功率Power: 3kW
扬程Max.Head: 16m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

WQDS(F)7-7-0.55
功率Power: 3kW
扬程Max.Head: 10m
流量Max.Flow: 65m^3/h
口径Outlet:100mm
频率Frequency: 50Hz/60Hz

WQDS(F)7-15-0.75
功率Power: 3kW
扬程Max.Head: 10m
流量Max.Flow: 160m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

WQDS(F)10-12-0.75
功率Power: 4kW
扬程Max.Head: 46m
流量Max.Flow: 20m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

WQDS(F)8-16-1.1
功率Power: 4kW
扬程Max.Head: 40m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

WQDS(F)12-12-1.1
功率Power: 4kW
扬程Max.Head: 21m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

WQDS(F)8-20-1.5
功率Power: 4kW
扬程Max.Head: 14m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

WQDS(F)15-15-1.5
功率Power: 4kW
扬程Max.Head: 4.5m
流量Max.Flow: 200m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QDXS(F)3-8-0.25
功率Power: 5.5kW
扬程Max.Head: 40m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QDXS(F)1.5-16-0.37
功率Power: 5.5kW
扬程Max.Head: 24m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QDXS(F)3-20-0.55
功率Power: 5.5kW
扬程Max.Head: 18m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QDXS(F)1.5-22-0.75
功率Power: 5.5kW
扬程Max.Head: 8m
流量Max.Flow: 200m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QDXS(F)1.5-30-1.1
功率Power: 7.5kW
扬程Max.Head: 50m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QDXS(F)15-15-1.1
功率Power: 7.2kW
扬程Max.Head: 38m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QDX(F) 镀铬潜水泵
QDX(F) chrome-plated submersible pump

QDX(F)1.5-16-0.37
功率Power: 0.37kW
扬程Max.Head: 16m
流量Max.Flow: 1.5m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDX(F)3-20-0.75
功率Power: 0.75kW
扬程Max.Head: 20m
流量Max.Flow: 3m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDX(F)3-32-1.1
功率Power: 1.1kW
扬程Max.Head: 32m
流量Max.Flow: 3m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

WQD(F)10-10-0.75
功率Power: 0.75kW
扬程Max.Head:10m
流量Max.Flow: 10m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

WQD(F)15-12-1.1
功率Power: 1.1kW
扬程Max.Head: 12m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QDXS(F) 中间不锈钢潜水泵
QDXS(F) stainless steel submersible pump

QDXS(F)1.5-16-0.37
功率Power: 0.37kW
扬程Max.Head: 16m
流量Max.Flow: 1.5m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDXS(F)3-20-0.55
功率Power: 0.55kW
扬程Max.Head: 20m
流量Max.Flow: 3m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDXS(F)1.5-32-0.75
功率Power: 0.75kW
扬程Max.Head: 32m
流量Max.Flow: 1.5m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDXS(F)10-16-0.75
功率Power: 0.75kW
扬程Max.Head: 16m
流量Max.Flow: 10m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QDXS(F)3-40-1.1
功率Power: 1.1kW
扬程Max.Head: 40m
流量Max.Flow: 3m^3/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

QDXS(F)15-18-1.1
功率Power: 1.1kW
扬程Max.Head: 18m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QDXS(F)45-7-1.5
功率Power: 1.5kW
扬程Max.Head: 7m
流量Max.Flow: 45m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QDXS(F)55-7-1.8
功率Power: 1.8kW
扬程Max.Head: 7m
流量Max.Flow: 55m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QDXS(F)65-9-2.2
功率Power: 2.2kW
扬程Max.Head: 9m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QDX(F)

潜水泵

QDX(F) SUBMERSIBLE PUMP

PRODUCT

TRANSPARENT DIAGRAM

产品透视图

全铜电机 100% Copper coil

电机采用高性能冷轧矽钢片、温升低、效率高、动力足、使用寿命长
内置热保护器使水泵在卡机过载等异常运行时自动停机

高精转子 High precision rotor

定转子采用含硅量高的宝钢带钢，智能精加工铸造成型尺寸精度高
运行平稳，表面经防潮防锈处理

四氟橡胶机械密封 PTFE mechanical seal

不锈钢弹簧，高强度密封好，经久耐用耐磨损，阻力小
防沙，使用寿命长

滚珠高精度轴承 C&U bearing

精工轴承，运行平稳，防尘效果好，使用寿命长

铝制叶轮 Aluminum impeller

流量加大、水量更加膨胀、从而提高工作效率、细节决定品质
精工制作、经久耐用

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

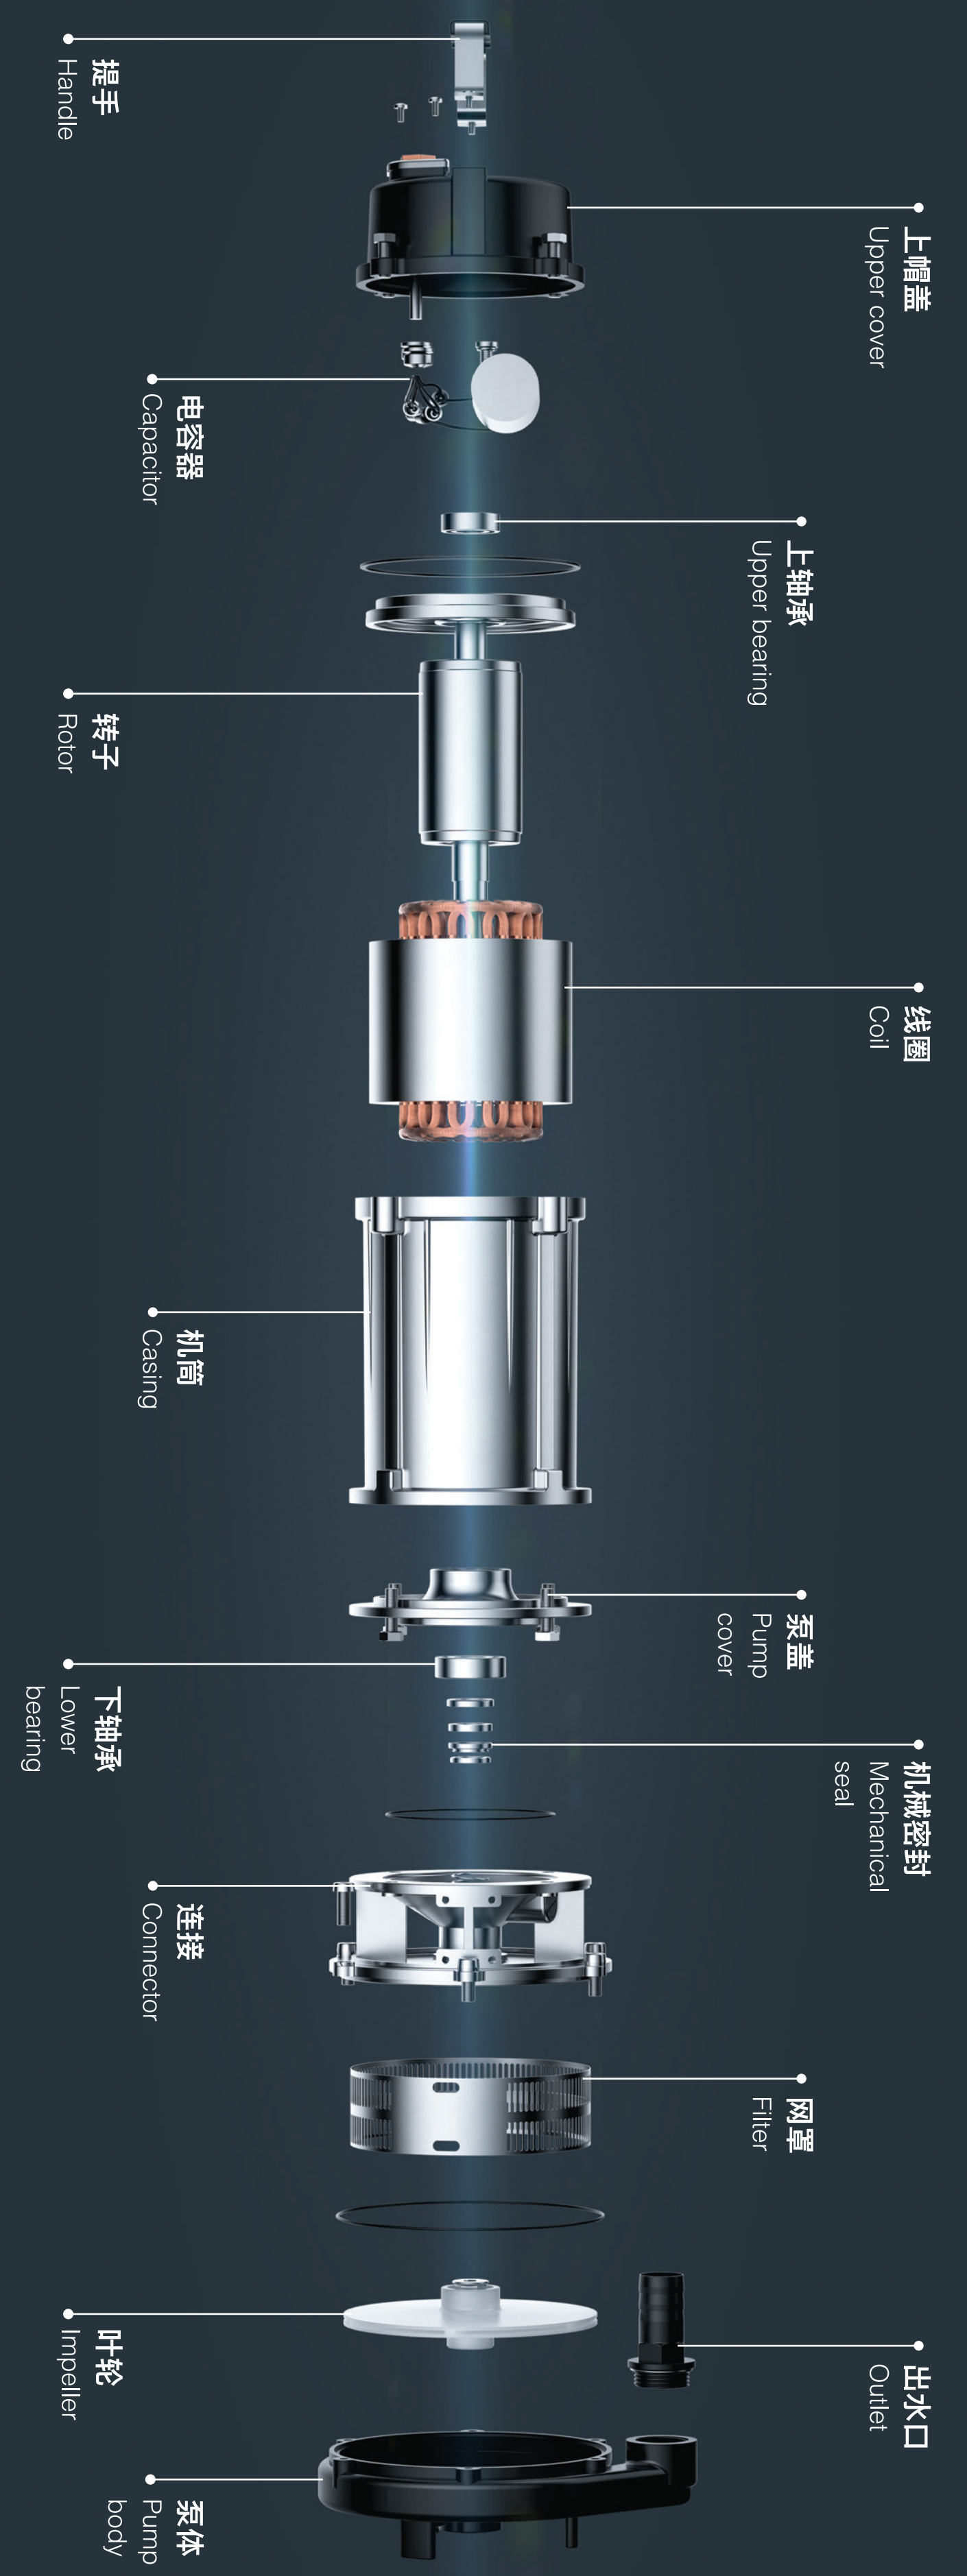

QDXT(F)
SUBMERSIBLE PUMP
WITH IRON CASING

QDXT(F) 新款铸铁潜水电泵

QDXT(F)1.5-16-0.4	功率Power: 螺纹口/0.4kW	扬程Max.Head: 18m	流量Max.Flow: 5m³/h	口径Outlet: 25mm	频率Frequency: 50Hz/60Hz
QDXT(F)3-20-0.55	功率Power: 螺纹口/0.55kW	扬程Max.Head: 21m	流量Max.Flow: 6m³/h	口径Outlet: 25mm	频率Frequency: 50Hz/60Hz
QDXT(F)1.5-32-0.75	功率Power: 螺纹口/0.75kW	扬程Max.Head: 34m	流量Max.Flow: 8m³/h	口径Outlet: 25mm	频率Frequency: 50Hz/60Hz
QDXT(F)10-16-0.75	功率Power: 螺纹口/0.75kW	扬程Max.Head: 18m	流量Max.Flow: 20m³/h	口径Outlet: 50mm	频率Frequency: 50Hz/60Hz
QDXT(F)3-40-1.1	功率Power: 螺纹口/1.1kW	扬程Max.Head: 40m	流量Max.Flow: 8m³/h	口径Outlet: 25mm	频率Frequency: 50Hz/60Hz
QDXT(F)15-18-1.1	功率Power: 螺纹口/1.1kW	扬程Max.Head: 20m	流量Max.Flow: 25m³/h	口径Outlet: 50mm	频率Frequency: 50Hz/60Hz
QDXT(F)45-7-1.5	功率Power: 平口 小3寸/1.5kW	扬程Max.Head: 7m	流量Max.Flow: 45m³/h	口径Outlet: 80mm	频率Frequency: 50Hz/60Hz
QDXT(F)55-7-1.8	功率Power: 平口 大3寸/1.8kW	扬程Max.Head: 7m	流量Max.Flow: 55m³/h	口径Outlet: 80mm	频率Frequency: 50Hz/60Hz
QDXT(F)65-9-2.2	功率Power: 平口 中4寸/2.2kW	扬程Max.Head: 9m	流量Max.Flow: 65m³/h	口径Outlet: 100mm	频率Frequency: 50Hz/60Hz
QDXT(F)65-9-2.2	功率Power: 平口 大4寸/2.2kW	扬程Max.Head: 9m	流量Max.Flow: 65m³/h	口径Outlet: 100mm	频率Frequency: 50Hz/60Hz
WQT(F)135-10-3.5	功率Power: 平口 大6寸/3.5kW	扬程Max.Head: 10m	流量Max.Flow: 135m³/h	口径Outlet: 150mm	频率Frequency: 50Hz/60Hz

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

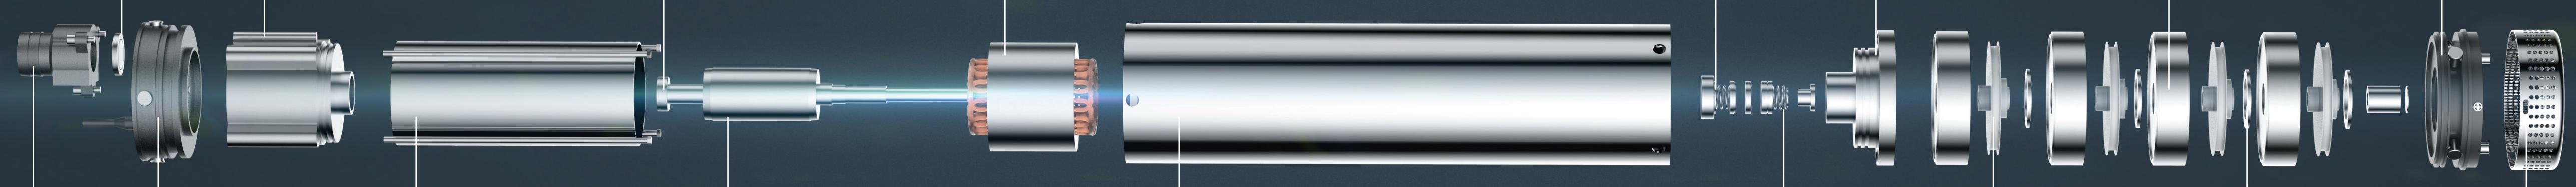

QDXN

MULTI STAGE WATER FILLED SUBMERSIBLE PUMP

充水内装式潜水泵，外径小，具备广泛用途，可最低降水至5cm高度，电机可裸露水面使用不损伤。

Water filled submersible pump QDXN has a wide range of usage, It pumps the water to the minimum level down to 5cm height. The motor runs perfectly on the surface without any damage.

QDXN 多级充水式潜水泵

QDX3-40/4-0.75	功率Power: 0.75kW 扬程Max.Head: 40/4m 流量Max.Flow: 3m³/h 频率Frequency: 50Hz/60Hz
QDX3-55/5-1.1	功率Power: 1.1kW 扬程Max.Head: 55/5m 流量Max.Flow: 3m³/h 频率Frequency: 50Hz/60Hz
QDX3-65/6-1.5	功率Power: 1.5kW 扬程Max.Head: 65/6m 流量Max.Flow: 3m³/h 频率Frequency: 50Hz/60Hz

OIL IMMERSED
SUBMERSIBLE PUMP SERIES
油浸式潜水泵系列

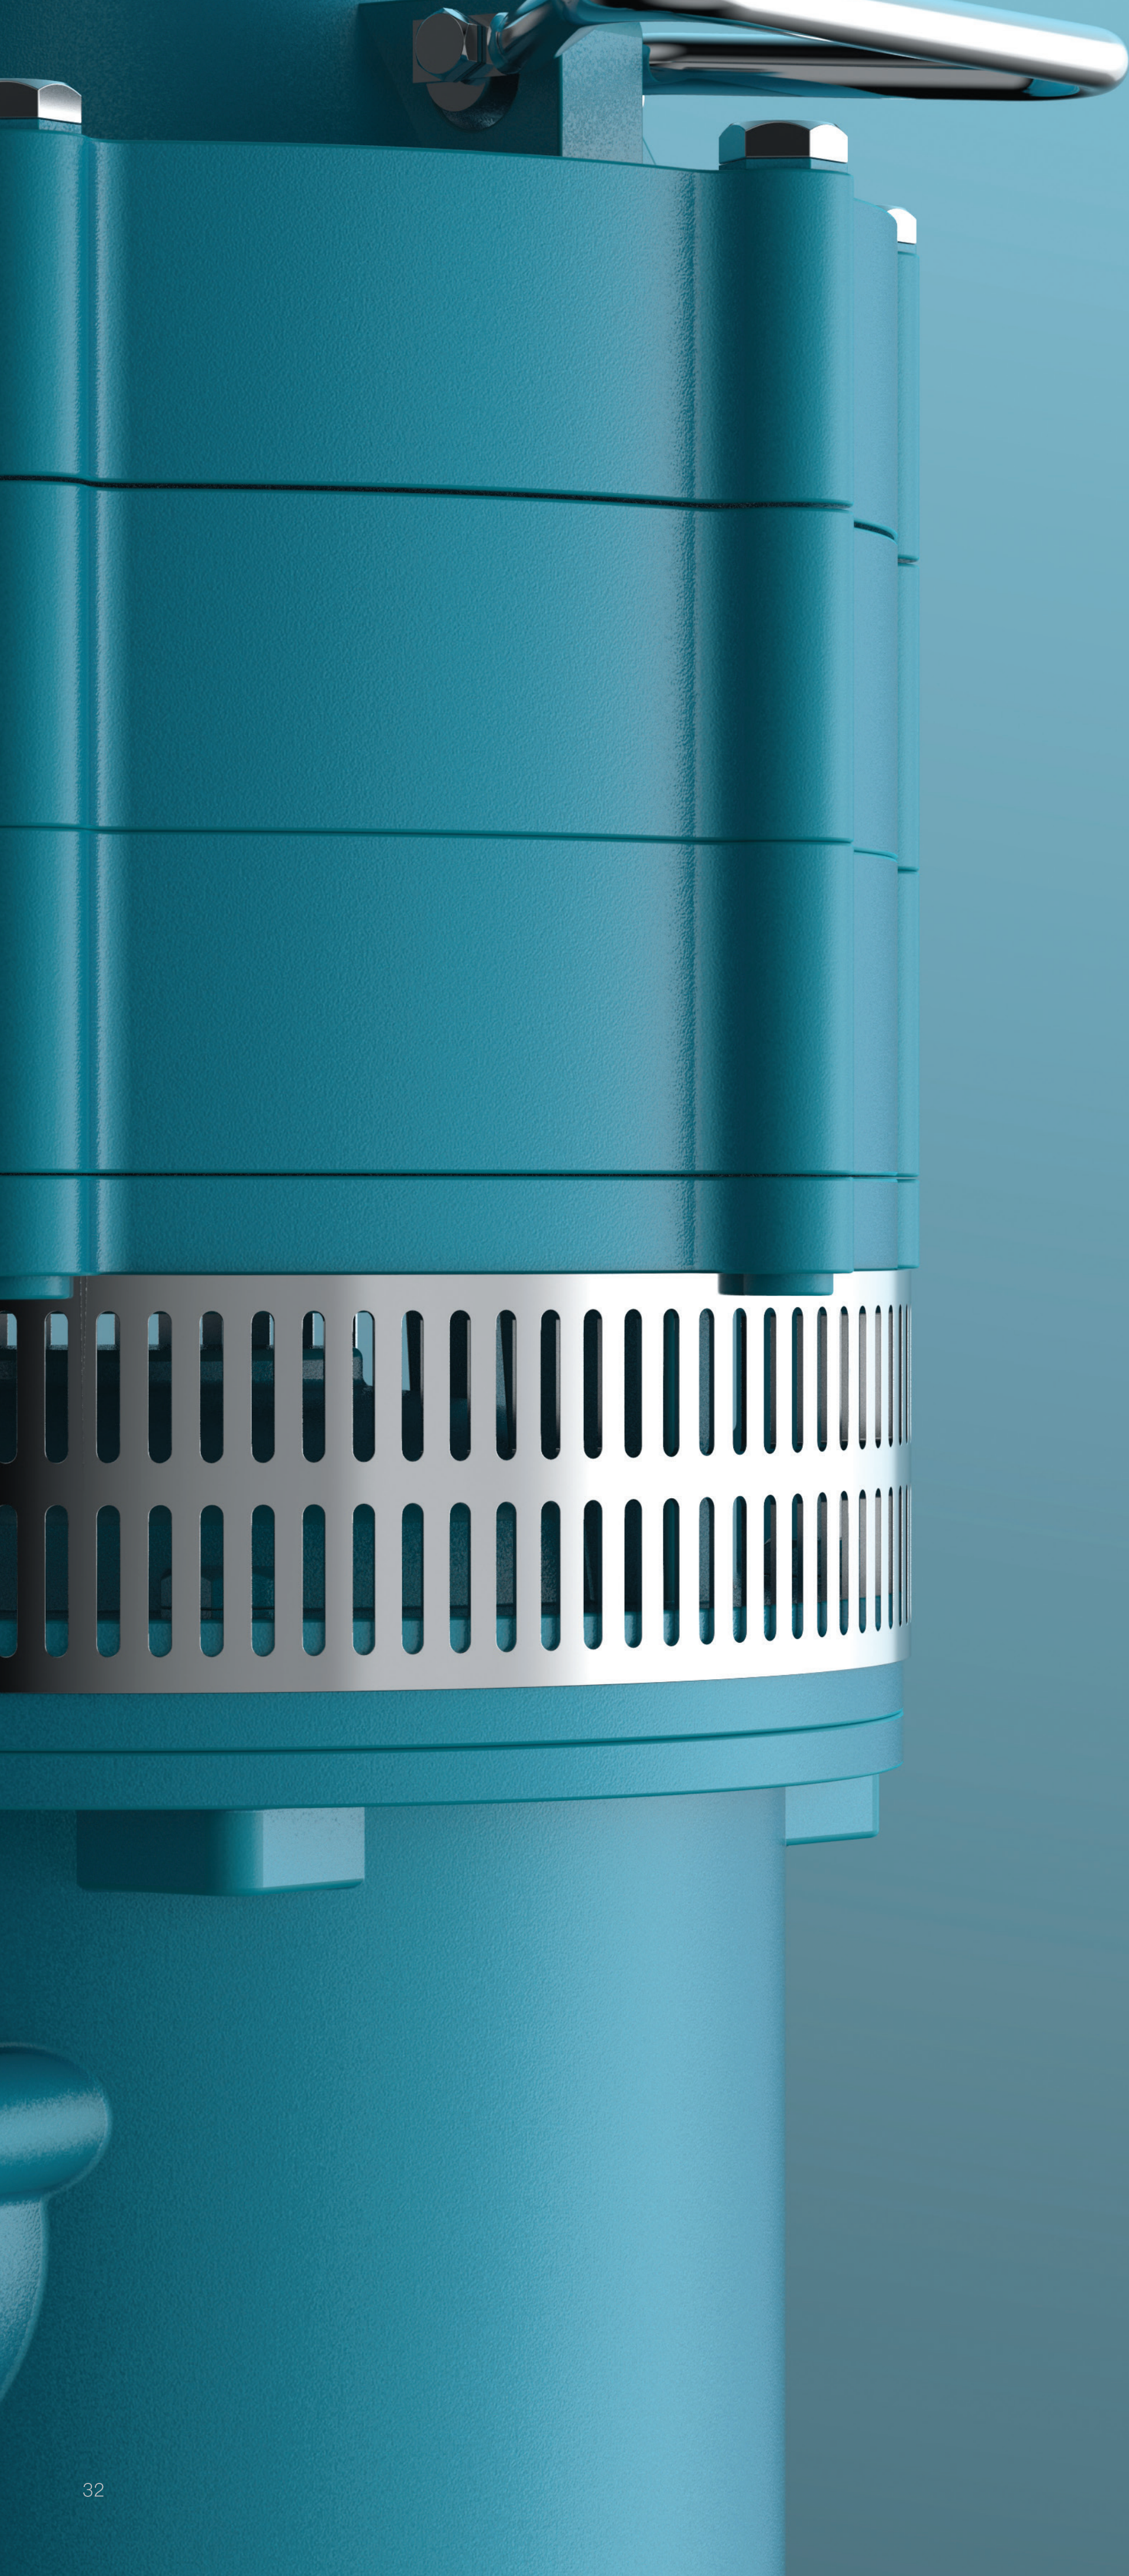

Pump

Max.immersion depth: 5m
Max.liquid temperature: +40℃
Fluid temperature up to: +35℃
Pumo Body: Cast Iron
Impeller: Aluminum
Double sealing structure

Motor

Copper winding
Single Phase / Three Phase / Continuous Work
Motor Housing: Cast iron
Shaft: Stainless steel welded shaft /45# steel shaft
Insulation class: B or F
Protection class: IPx8
Cable cap cover with epoxy sealant
Adopts oil-filled type structure

MULTI-STAGE SUBMERSIBLE
PUMP SERIES
多级潜水泵系列

Application

Q(D) models muti-staoe submersible electric pump can divide into two type:dry motor one and oil-immersed one,Electric pump is made up by water pump and motor, pump is located in the upper of electric pump,and the structure for the impellers are multistage centrifugal impellers,while guide vane is radial structure. The motor in the bottom of the pump use single phase or three phase asynchronous motor structure. Between the pump and the motor, it adopts double seal. The fixed seam use O-type oil resistant sealing ring seal as static seal.

Q(D)多级潜水电泵可分为干式和油浸式两种，电动泵由水泵和电动机组成，泵位于电动泵的上部，其结构 叶轮为多级离心叶轮，导叶为径向结构。泵底部的电动机采用单相或三相异步电动机结构。 在泵和电动机之间，采用双密封。 固定接缝使用O型耐油密封圈密封件作为静态密封件。

QD/Q 小型多级潜水泵

QD/Q3-40/2-1.1	功率Power: 两叶轮/1.1kW 扬程Max.Head: 40m 流量Max.Flow: 3m³/h 口径Outlet: 25mm 频率Frequency: 50Hz/60Hz	**QD/Q3-50/3-1.5**	功率Power: 三叶轮/1.5kW 扬程Max.Head: 50m 流量Max.Flow: 3m³/h 口径Outlet: 25mm 频率Frequency: 50Hz/60Hz	**QD/Q3-60/4-2.2**	功率Power: 四叶轮/2.2kW 扬程Max.Head: 60m 流量Max.Flow: 3m³/h 口径Outlet: 25mm 频率Frequency: 50Hz/60Hz
QD/Q10-26/2-1.8	功率Power: 两叶轮/1.8kW 扬程Max.Head: 26m 流量Max.Flow: 10m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**QD/Q10-36/3-2.2**	功率Power: 三叶轮/2.2kW 扬程Max.Head: 36m 流量Max.Flow: 10m³/h 口径Outlet: 25mm 频率Frequency: 50Hz/60Hz	**Q3-100/6-3**	功率Power: 六叶轮/3kW 扬程Max.Head: 100m 流量Max.Flow: 3m³/h 口径Outlet: 25mm 频率Frequency: 50Hz/60Hz
QD15-52/4-3	功率Power: 四叶轮/3kW 扬程Max.Head: 52m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**QD15-65/5-3**	功率Power: 五叶轮/3kW 扬程Max.Head: 65m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**QD15-78/6-4**	功率Power: 六叶轮/4kW 扬程Max.Head: 78m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz

QY

OIL-IMMERSED SUBMERSIBLE PUMPS

中大型油浸式潜水泵

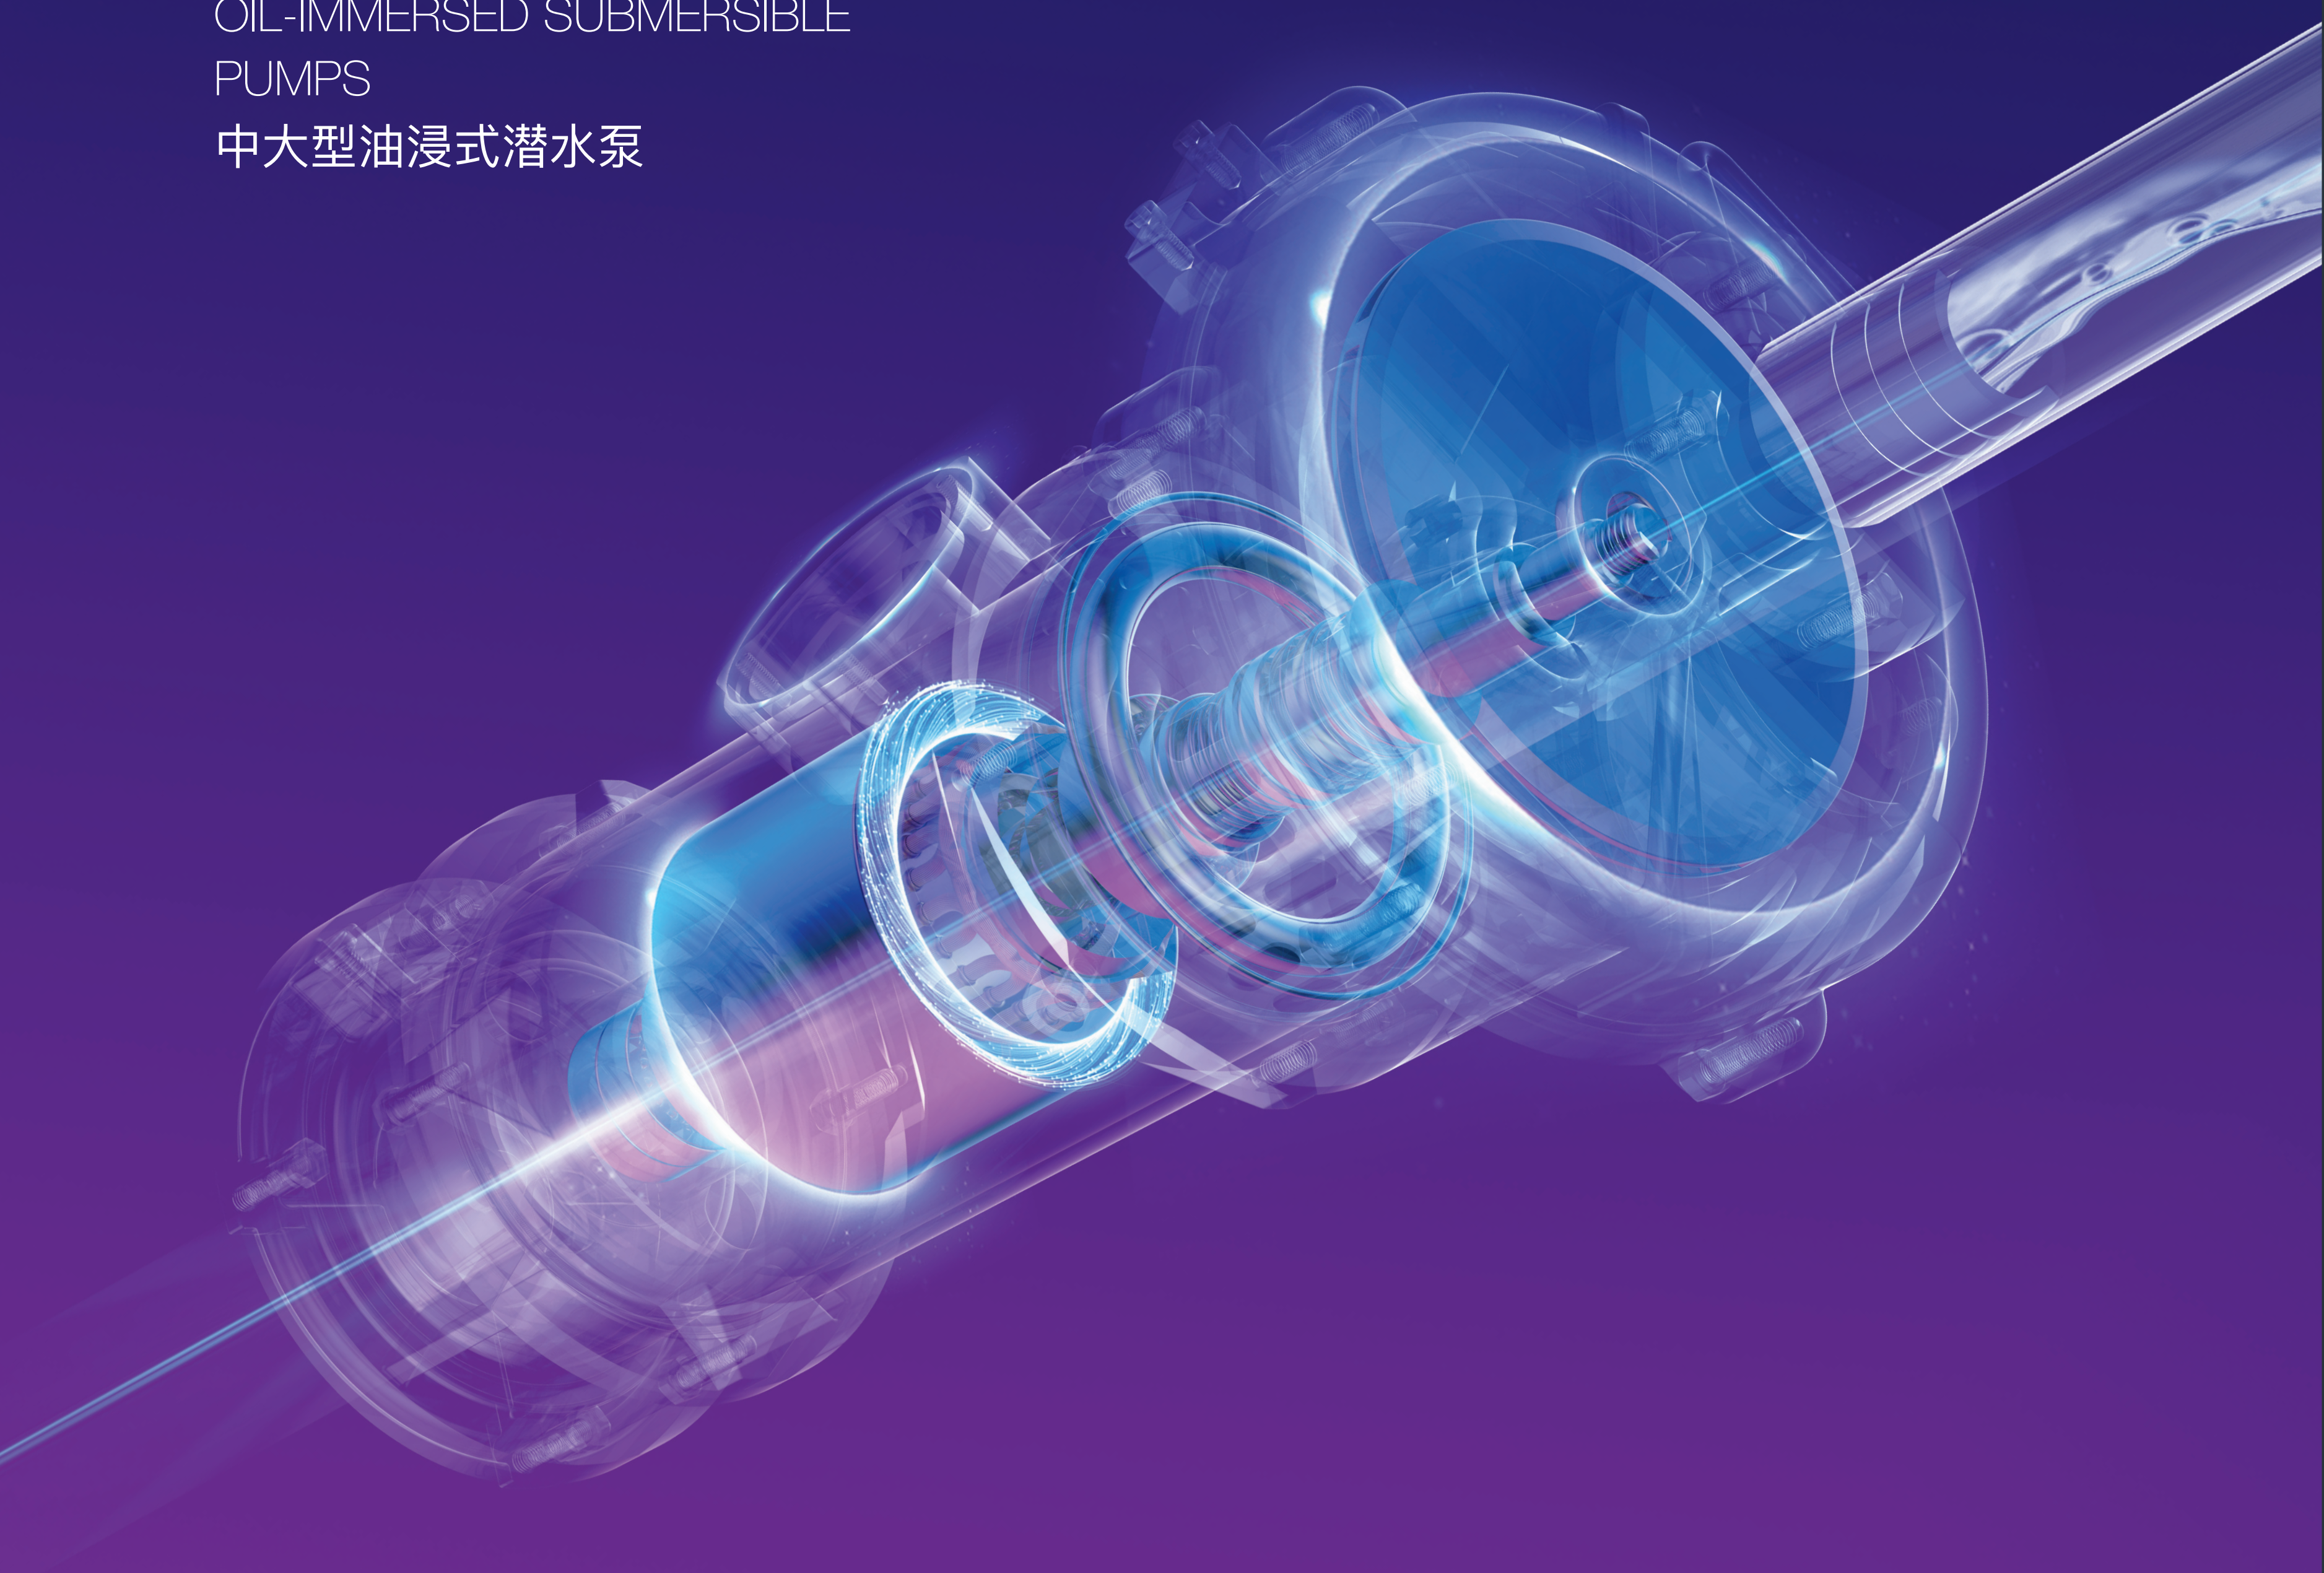

Pump

Max.immersion depth: 5m
Max.liquid temperature: +40℃
Fluid temperature up to: +35℃
Pumo Body: Cast Iron
Impeller: Cast Iron
Double sealing structure

Motor

Copper winding
Three Phase(380V/50Hz)/Continuous Work
Motor Housing: Cast iron
Shaft: Stainless steel welded shaft /45# steel be electroplated
Insulation class: B or F
Protection class: IPx8
Adopts oil-filled type structure
Anti burst Structure

PRODUCT

BREAKDOWN DIAGRAM

产品分解图

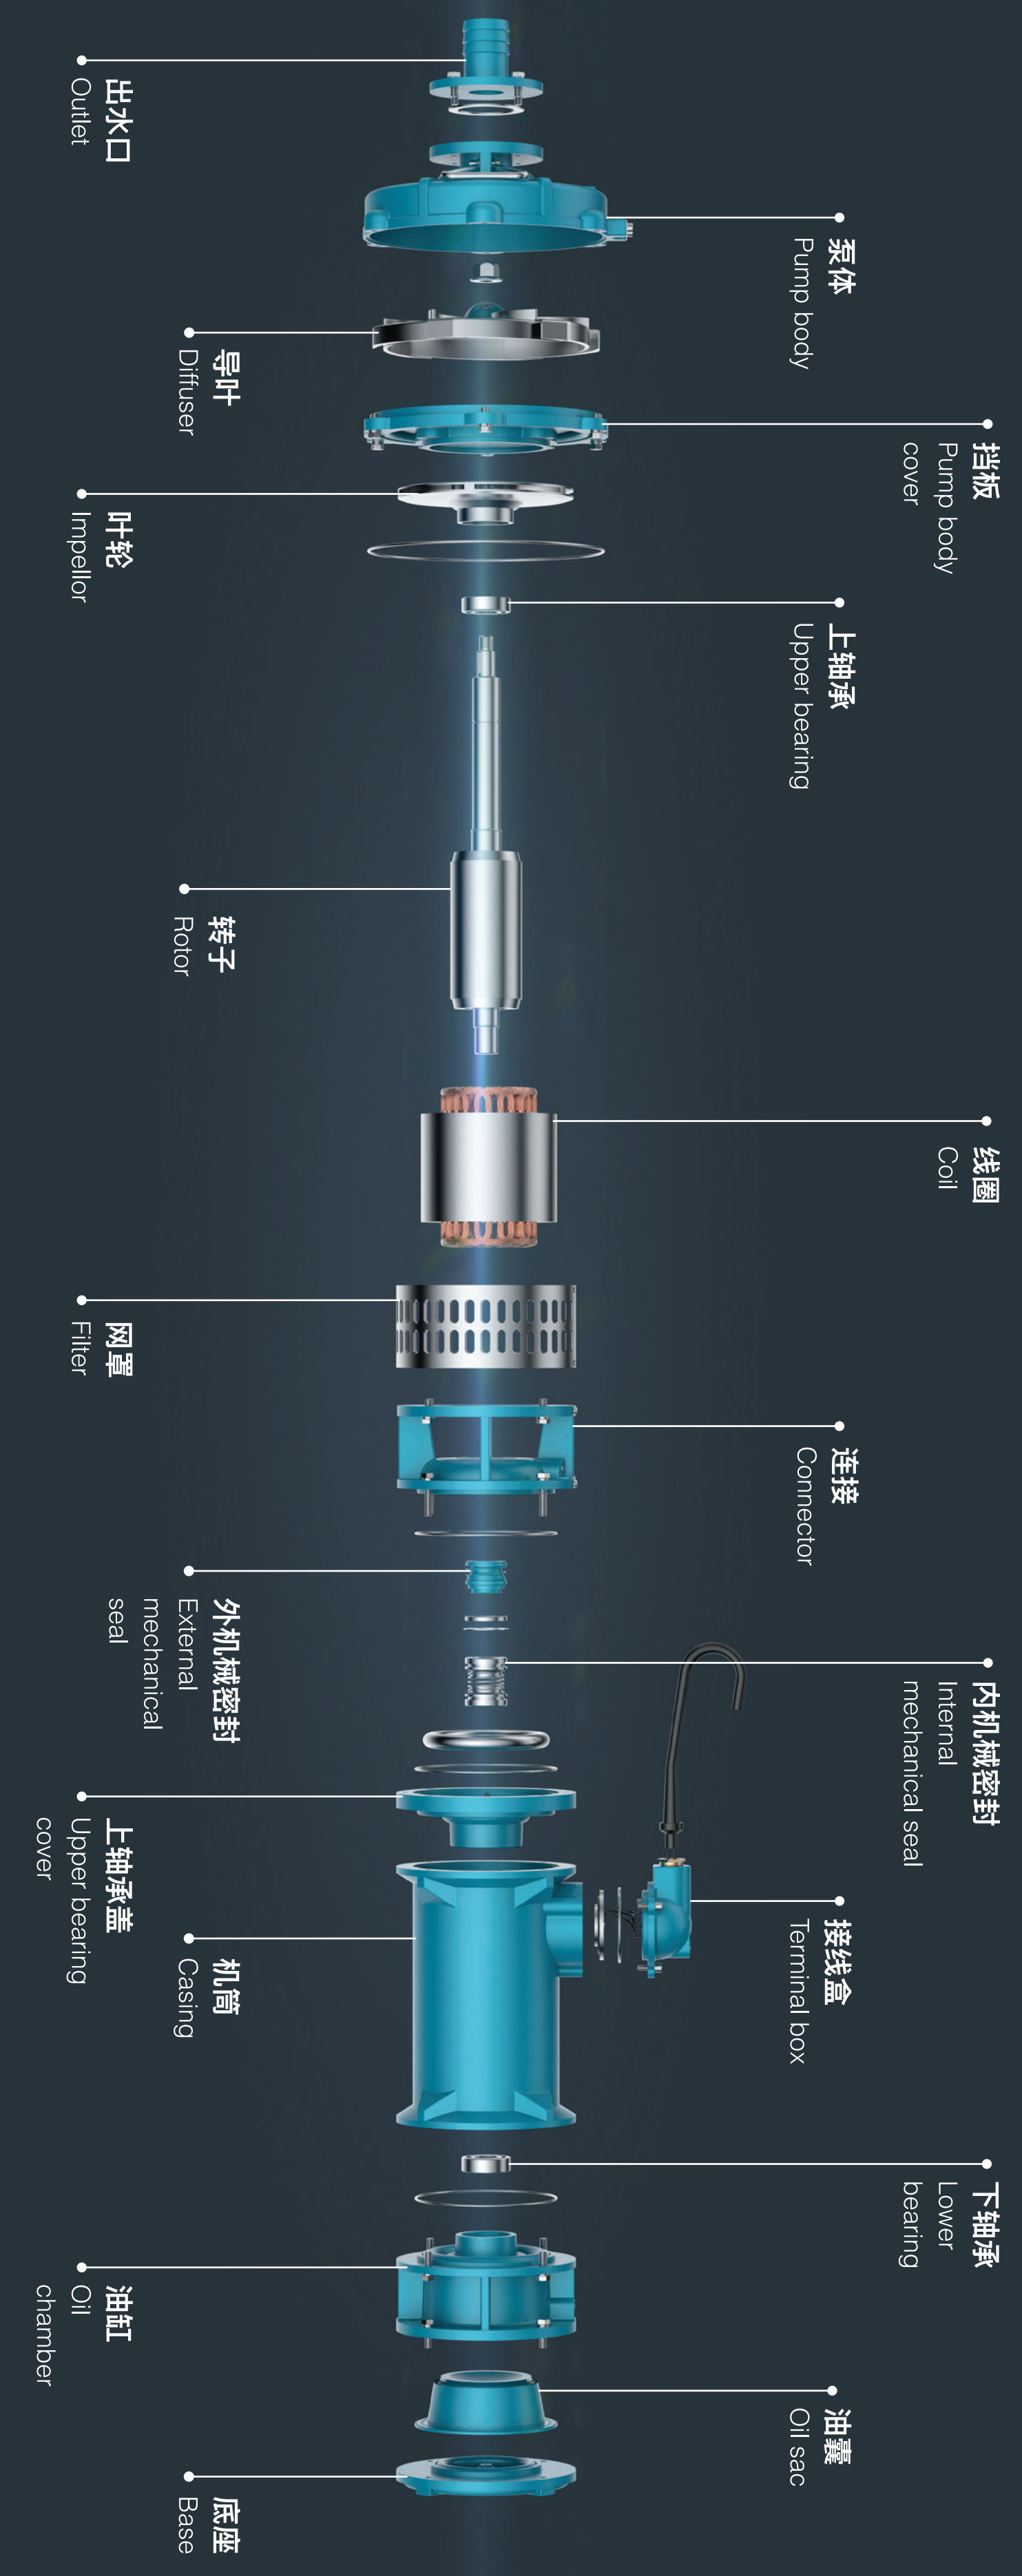

QY

OIL-IMMERSED SUBMERSIBLE PUMP






QY 中大型油浸式潜水泵

QY15-26-2.2
功率Power: 2.2kW
扬程Max.Head: 26m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QY25-17-2.2
功率Power: 2.2kW
扬程Max.Head: 17m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QY40-12-2.2
功率Power: 2.2kW
扬程Max.Head: 12m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-7-2.2
功率Power: 2.2kW
扬程Max.Head: 7m
流量Max.Flow: 65m^3/h
口径Outlet:100mm
频率Frequency: 50Hz/60Hz

QY100-4.5-2.2
功率Power: 2.2kW
扬程Max.Head: 4.5m
流量Max.Flow: 100m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY15-36-3
功率Power: 3kW
扬程Max.Head: 36m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QY 中大型油浸式潜水泵

QY25-26-3
功率Power: 3kW
扬程Max.Head: 26m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QY40-16-3
功率Power: 3kW
扬程Max.Head: 16m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-10-3
功率Power: 3kW
扬程Max.Head: 10m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QY160-4.5-3
功率Power: 3kW
扬程Max.Head: 4.5m
流量Max.Flow: 160m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY20-46-4
功率Power: 4kW
扬程Max.Head: 46m
流量Max.Flow: 20m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

QY25-40-4
功率Power: 4kW
扬程Max.Head: 40m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QY40-21-4
功率Power: 4kW
扬程Max.Head: 21m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-14-4
功率Power: 4kW
扬程Max.Head: 14m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QY200-4.5-4
功率Power: 4kW
扬程Max.Head: 4.5m
流量Max.Flow: 200m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY25-40-5.5
功率Power: 5.5kW
扬程Max.Head: 40m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QY40-24-5.5
功率Power: 5.5kW
扬程Max.Head: 24m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-18-5.5
功率Power: 5.5kW
扬程Max.Head: 18m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QY200-8-5.5
功率Power: 5.5kW
扬程Max.Head: 8m
流量Max.Flow: 200m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY25-50-7.5
功率Power: 7.5kW
扬程Max.Head: 50m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

QY40-38-7.5
功率Power: 7.2kW
扬程Max.Head: 38m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-25-7.5
功率Power: 7.5kW
扬程Max.Head: 25m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QY200-12-7.5
功率Power: 7.5kW
扬程Max.Head: 12m
流量Max.Flow: 200m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY260-8-7.5
功率Power: 7.5kW
扬程Max.Head: 8m
流量Max.Flow: 260m^3/h
口径Outlet:200mm
频率Frequency: 50Hz/60Hz

QY40-60-11
功率Power: 11kW
扬程Max.Head: 60m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-42-11
功率Power: 11kW
扬程Max.Head: 42m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QY160-15-11
功率Power: 11kW
扬程Max.Head: 15m
流量Max.Flow: 160m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY200-10-11
功率Power: 11kW
扬程Max.Head: 10m
流量Max.Flow: 200m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

QY40-80-15
功率Power: 15kW
扬程Max.Head: 80m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

QY65-62-15
功率Power: 15kW
扬程Max.Head: 62m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

QY160-23-15
功率Power: 15kW
扬程Max.Head: 23m
流量Max.Flow: 160m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

QY250-14-15
功率Power: 15kW
扬程Max.Head: 14m
流量Max.Flow: 250m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

HOUSEHOLD
PUMP SERIES
家用泵系列

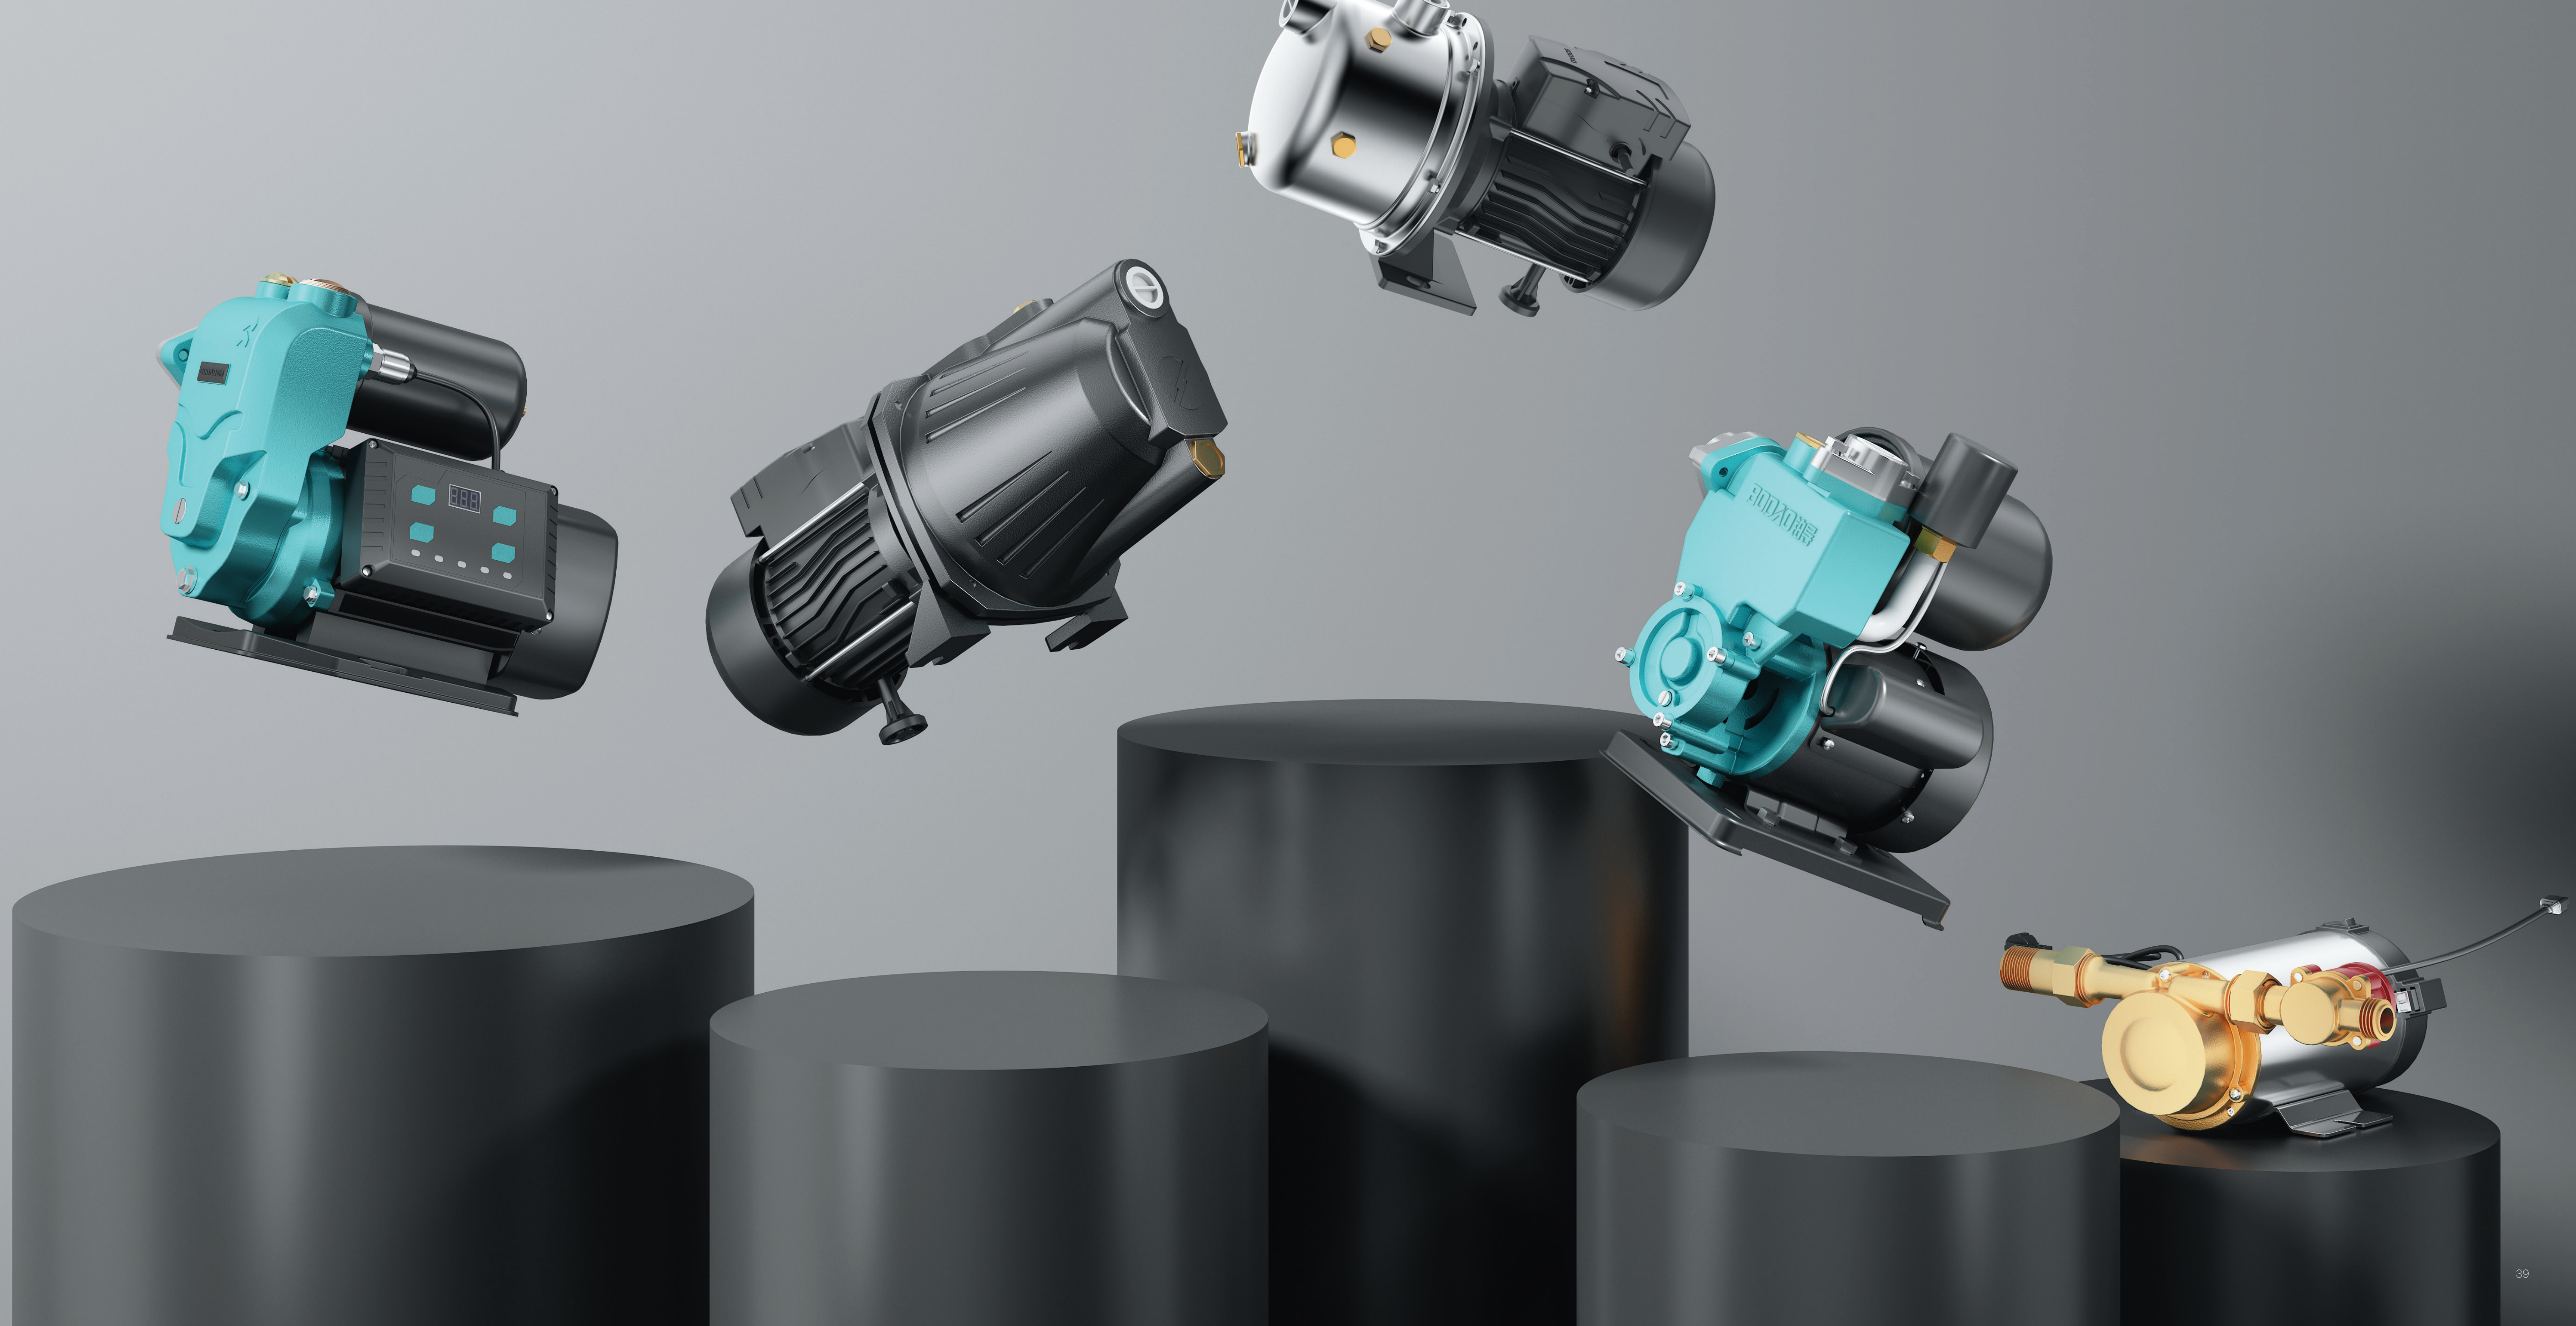

USAGE
SCENARIOS
使用场景

Pump

Max.liquid temperature: +0~+80℃
Liquid PH value :6.5–8.5
Cast iron pump body and support

Motor

Copper winding
Shaft:Stainless steel welded shaft/45# steel shaft
Insulation class: B or F
Protection class: IPx4
Max.Ambient temperature: +40℃
Cooling: External ventilation

Features

· Power off without water
· Not start frequently when tap water very small or leakage on the pipeline.Extend the service life of the pump.
· Jams and blocks protection
· Built-in thermal protectior

INTELLIGENT AUTOMATIC SELF-PRIMING VORTEX PUMP
智能家用自吸泵

PRODUCT
TRANSPARENT DIAGRAM
产品透视图

Pump
Max.liquid temperature:
+0~+80℃
Liquid PH value: 6.5~8.5
Cast iron pump body and
support

Motor
Copper winding
Shaft: Stainless steel welded shaft/45#
steel shaft
Insulation class: B or F
Protection class: IP×4
Max.Ambient temperature: +40℃
Cooling: External ventilation

Features
Power off without water
Not start frequently when tap water very
small or leakage on the pipeline. Extend the
service life of the pump.
Jams and blocks protection
Built-in thermal protector

Application
WZB intelligent vortex self-priming pump is a combination of motors, pumps, pressure tanks, pressure switches, flow sensor switch and electronic controllers for the integration of intelligent automatic water supply system.
These pumps are widely used in apartment water supply systems, automatic water system pressurized floors, but also for the hotels, canteens, supermarkets, beauty salons, office buildings and other public occasions.

主要用途
WZB智能涡旋自吸泵是由电动机，泵，压力罐，压力开关，流量传感器开关和电子控制器的组合，用于集成智能自动供水系统。
这些泵广泛用于公寓给水系统，自动给水系统增压地板，以及酒店，食堂，超级市场，美容院，办公大楼和其他公共场合。

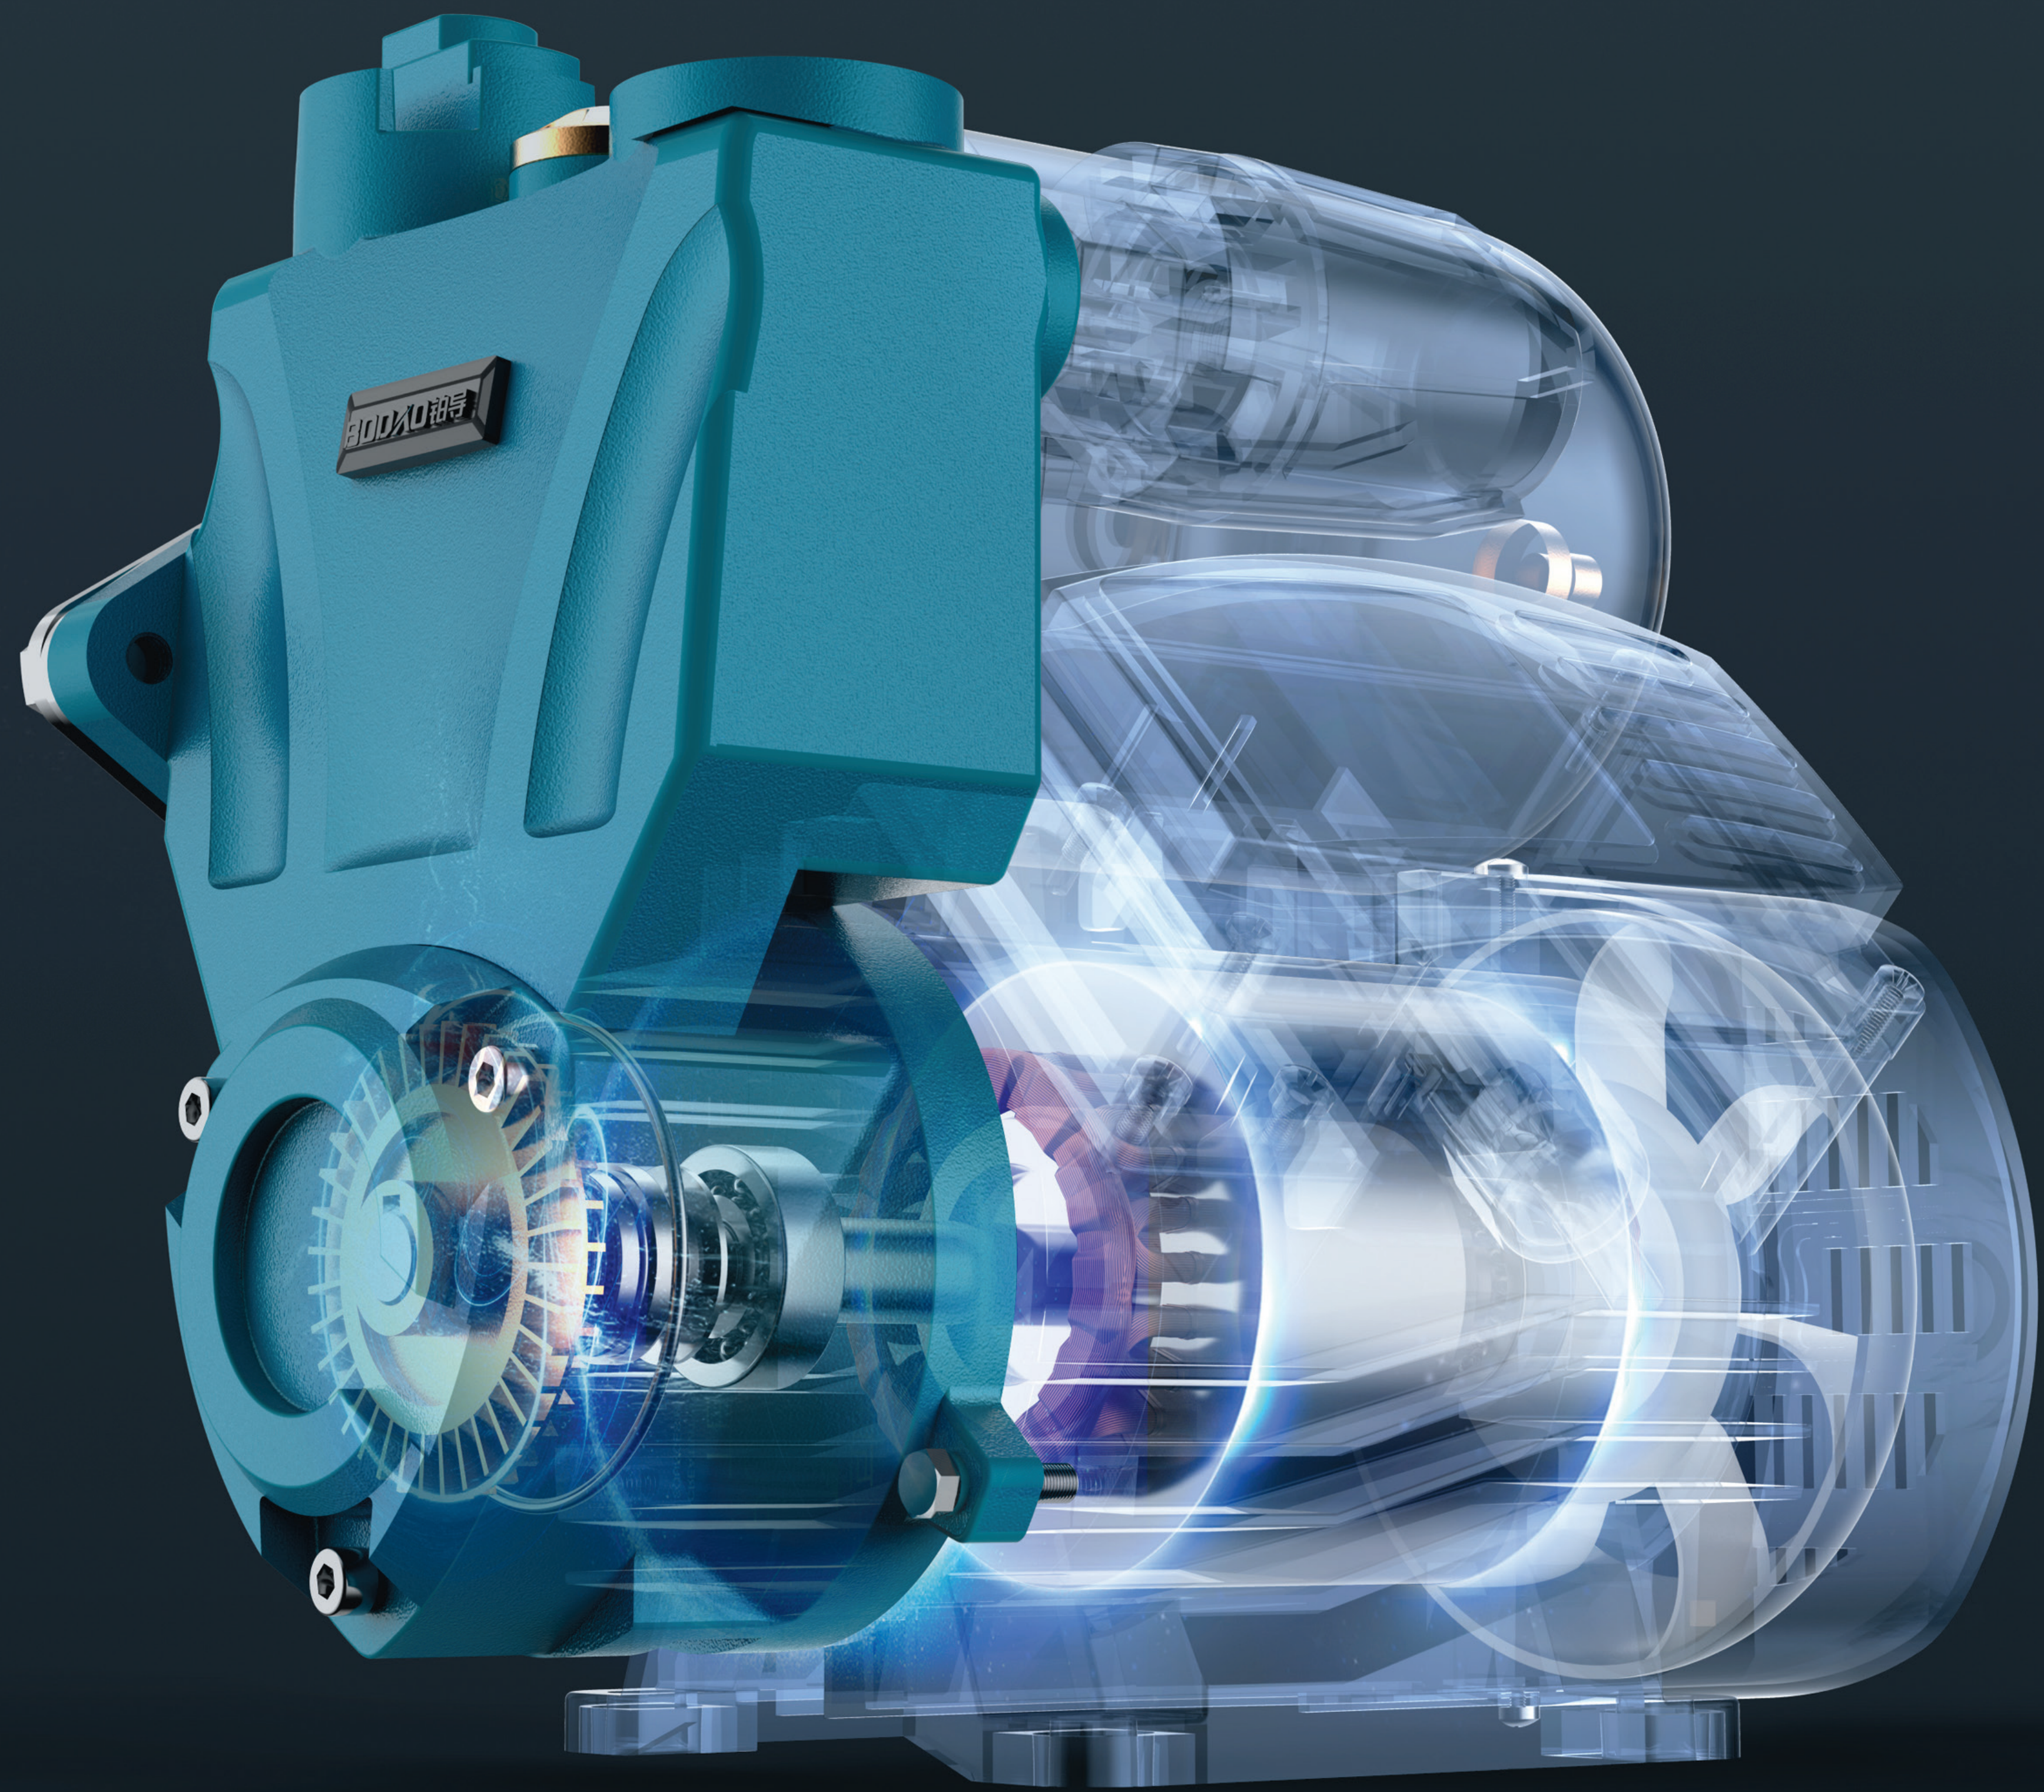

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

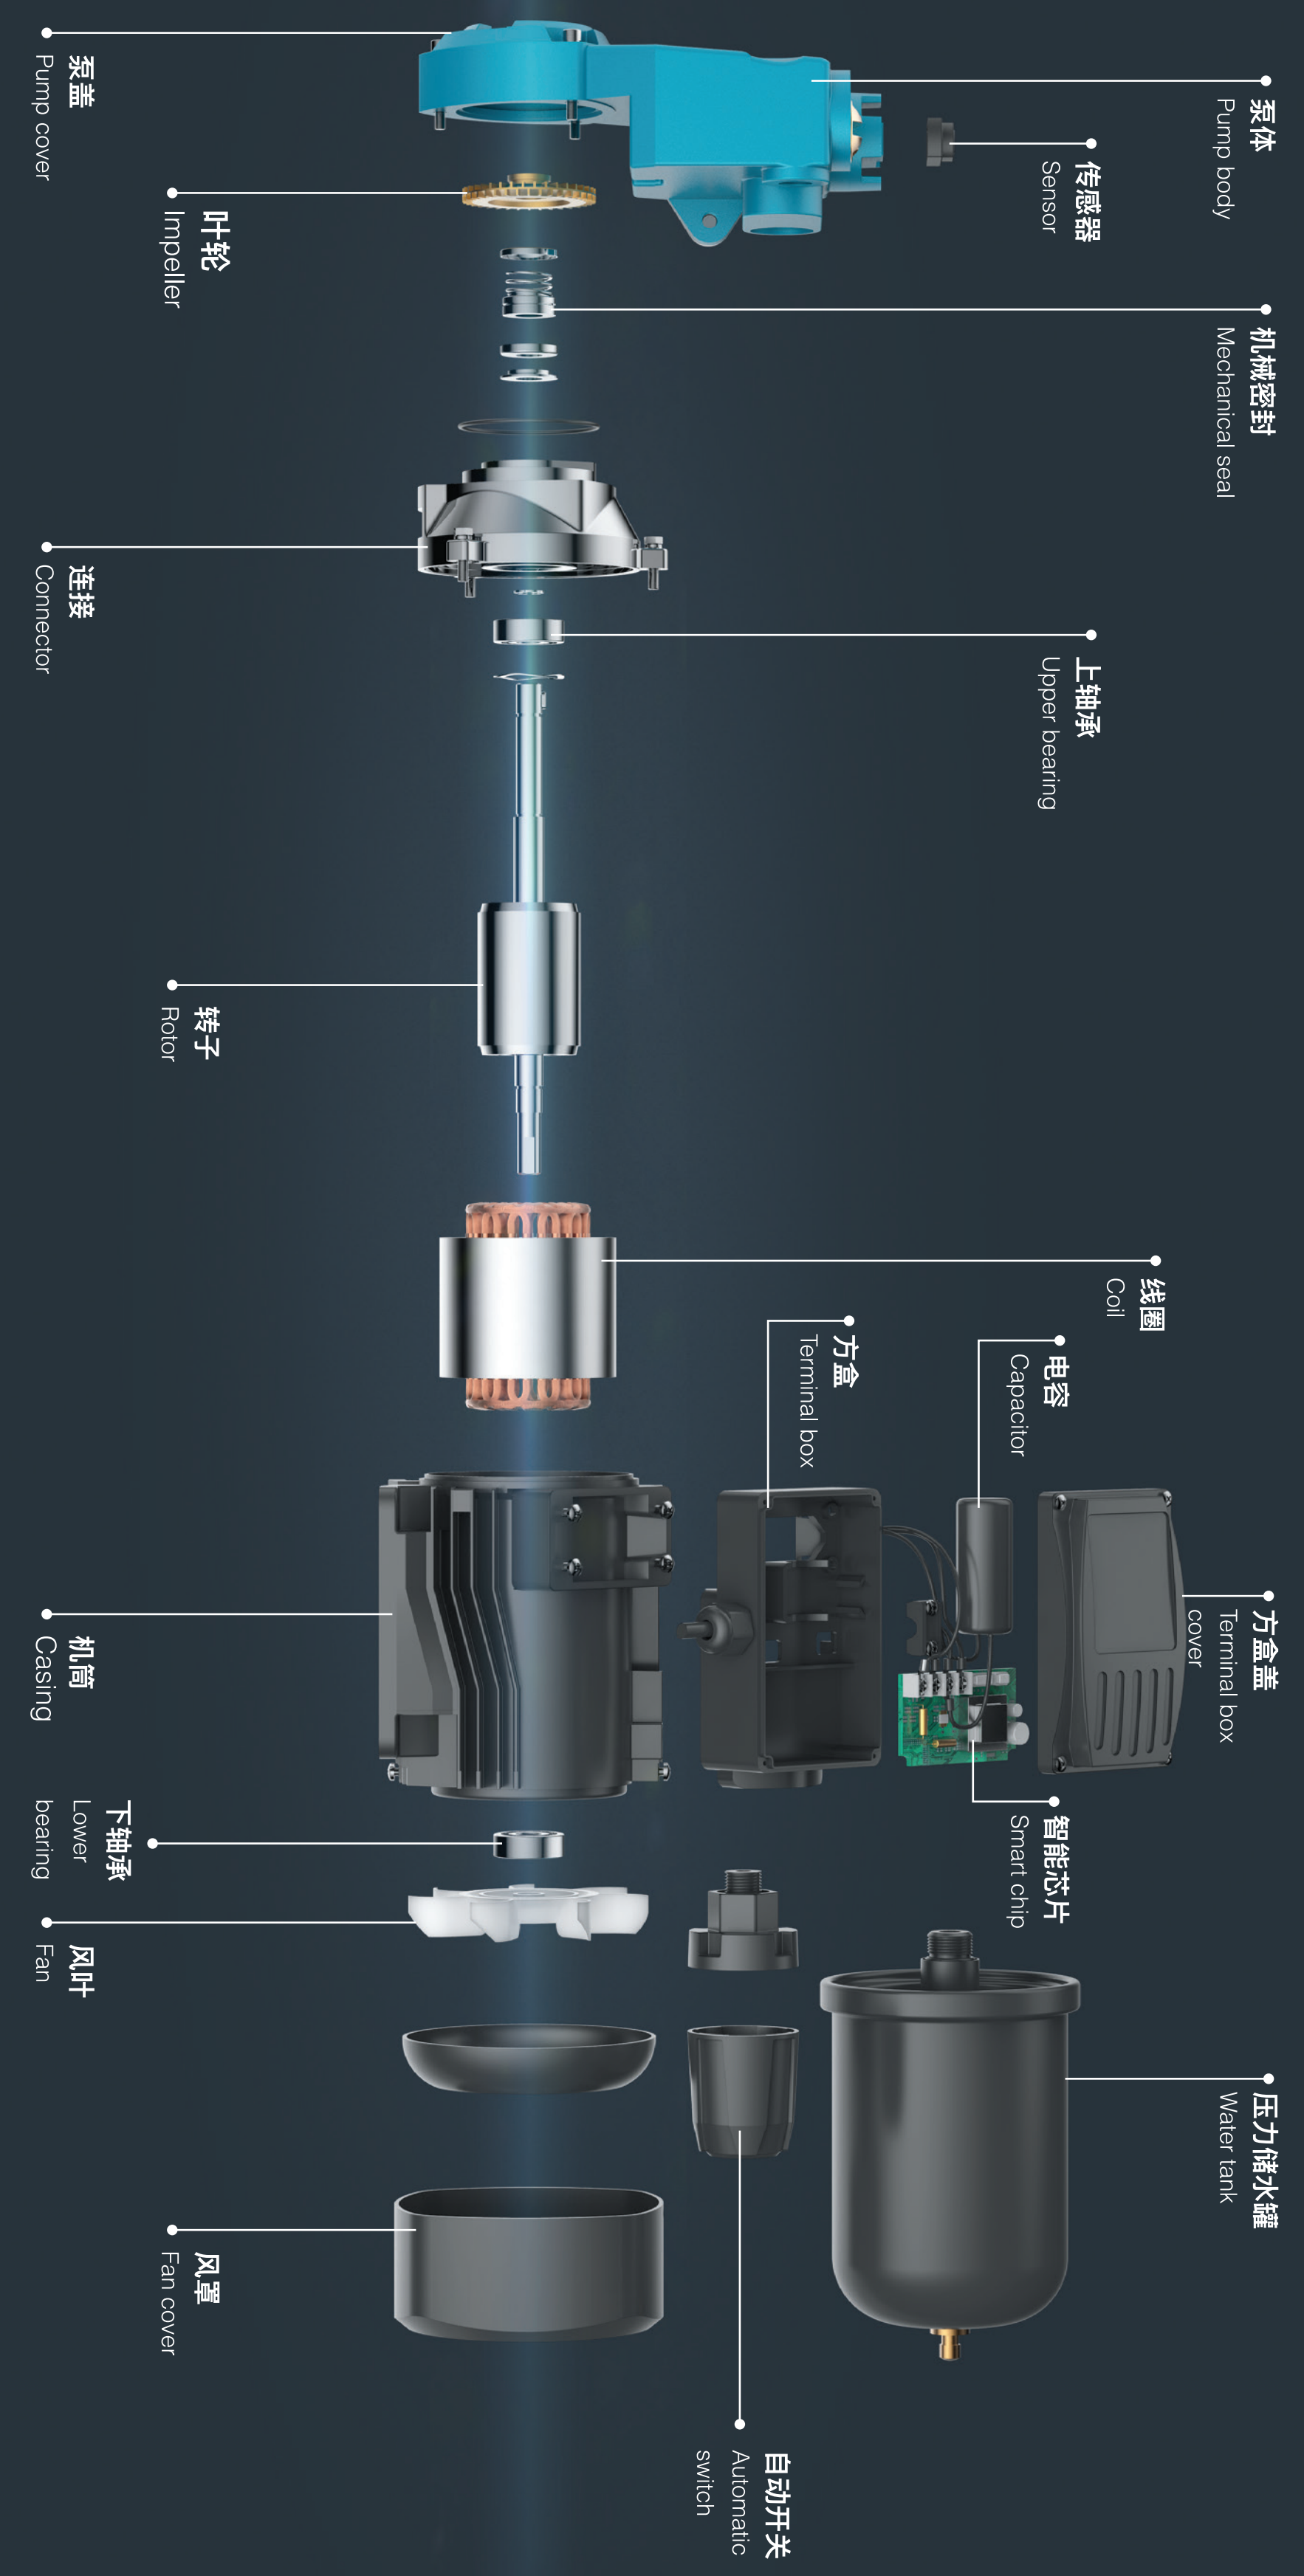



变频家用自吸泵 / 智能家用自吸泵

1WZB35-400
功率Power: 变频款/400W
扬程Max.Head: 35m
流量Max.Flow: 2.3m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB40-600
功率Power: 变频款/600W
扬程Max.Head: 40m
流量Max.Flow: 3.2m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB45-800
功率Power: 变频款/800W
扬程Max.Head: 45m
流量Max.Flow: 3.5m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1.5WZB50-1100
功率Power: 变频款/1100W
扬程Max.Head: 50m
流量Max.Flow: 6m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1.5WZB60-1500
功率Power: 变频款/1500W
扬程Max.Head: 60m
流量Max.Flow: 6.5m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

HOUSEHOLD
SELF-PRIMING PUMP

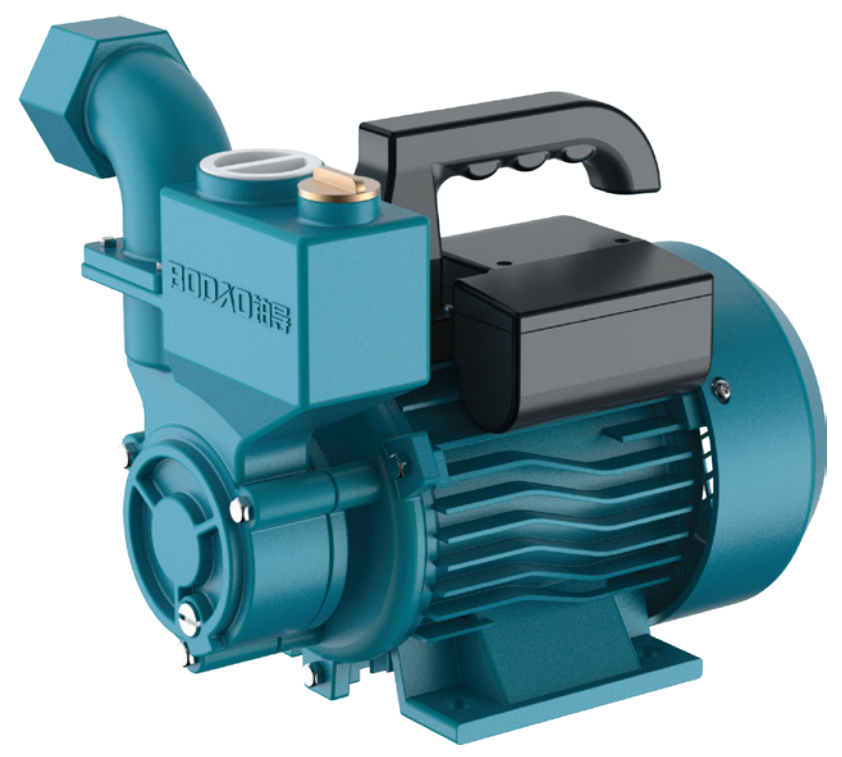

经典款家用自吸泵

25WBZ-35-0.37
功率Power: 0.37kW
扬程Max.Head: 35m
流量Max.Flow: 1m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

25WBZ-45-0.55
功率Power: 0.55kW
扬程Max.Head: 45m
流量Max.Flow: 1.5m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

25WBZ-55-0.75
功率Power: 0.75kW
扬程Max.Head: 55m
流量Max.Flow: 2m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

25WZB-65-1.1
功率Power: 1.1kW
扬程Max.Head: 65m
流量Max.Flow: 2.5m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB-125A
功率Power: 0.125kW
扬程Max.Head: 24m
流量Max.Flow: 0.8m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB-250A
功率Power: 0.25kW
扬程Max.Head: 28m
流量Max.Flow: 1m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB-370A
功率Power: 0.37kW
扬程Max.Head: 32m
流量Max.Flow: 1.2m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB-550A
功率Power: 0.55kW
扬程Max.Head: 38m
流量Max.Flow: 1.5m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1WZB-750A
功率Power: 0.75kW
扬程Max.Head: 44m
流量Max.Flow: 1.8m³/h
口径Outlet: 25mm
频率Frequency: 50Hz/60Hz

1.5WZB-1100A
功率Power: 1.1kW
扬程Max.Head: 20m
流量Max.Flow: 2.5m³/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

Pump
Stainless steel/Plastic pump body
Support: cast iron/Aluminum die casting
Stainless steel impeller
Max.liquid temperature: +40℃
Max.Suction: +9m

SELF-PRIMING JET PUMPS

STP40(P)
功率Power: 0.37kW
扬程Max.Head: 30m
流量Max.Flow: 40L/min
频率Frequency: 50Hz/60Hz

STP45(P)
功率Power: 0.55kW
扬程Max.Head: 36m
流量Max.Flow: 45L/min
频率Frequency: 50Hz/60Hz

STP50(P)
功率Power: 0.75kW
扬程Max.Head: 43m
流量Max.Flow: 60L/min
频率Frequency: 50Hz/60Hz

STP60(P)
功率Power: 1.1kW
扬程Max.Head: 55m
流量Max.Flow: 60L/min
频率Frequency: 50Hz/60Hz

AUTOMATIC PUMP STATION

AUJET-60L/S
功率Power: 0.37kW
扬程Max.Head: 36m
流量Max.Flow: 40L/min
频率Frequency: 50Hz/60Hz

AUJET-80L/S
功率Power: 0.55kW
扬程Max.Head: 38m
流量Max.Flow: 50L/min
频率Frequency: 50Hz/60Hz

AUJET-100L/S
功率Power: 0.75kW
扬程Max.Head: 43m
流量Max.Flow: 60L/min
频率Frequency: 50Hz/60Hz

Application

It is applicable to household water supply, equipment support, pipeline pressurization, garden watering, vegetable greenhouse watering, fish farming and poultry raising, industrial and mining, water supply and drainage of enterprises and high-rise buildings, central air conditioner and centralized heating circulation system.

适用于家庭给水，设备配套，管道增压，花园给水，蔬菜大棚给水，养鱼和家禽饲养，工矿，企业和高层建筑的给排水，中央空调和集中供热循环系统。

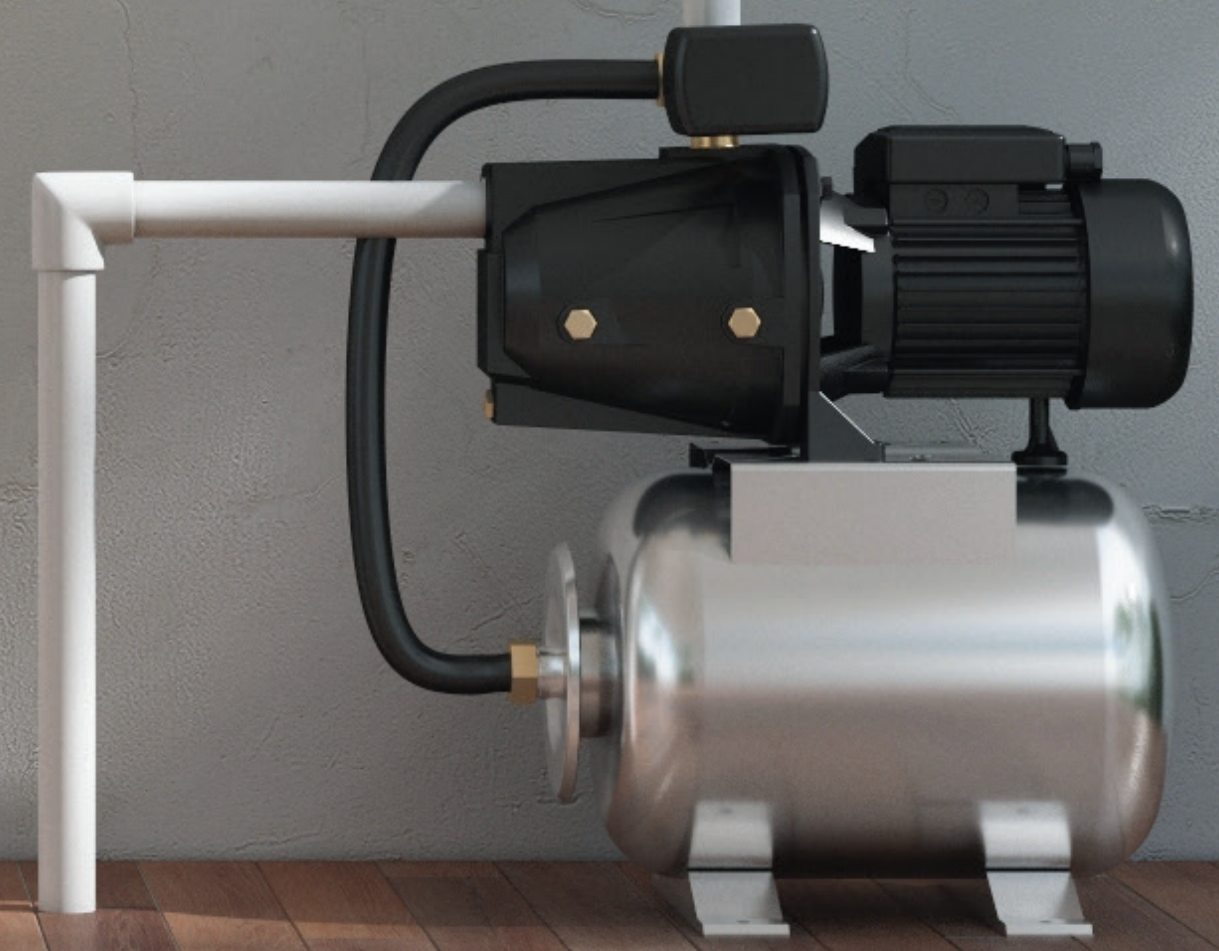

JET PUMP

自吸喷射泵

SELF-PRIMING JET PUMP

PRODUCT
TRANSPARENT DIAGRAM
产品透视图

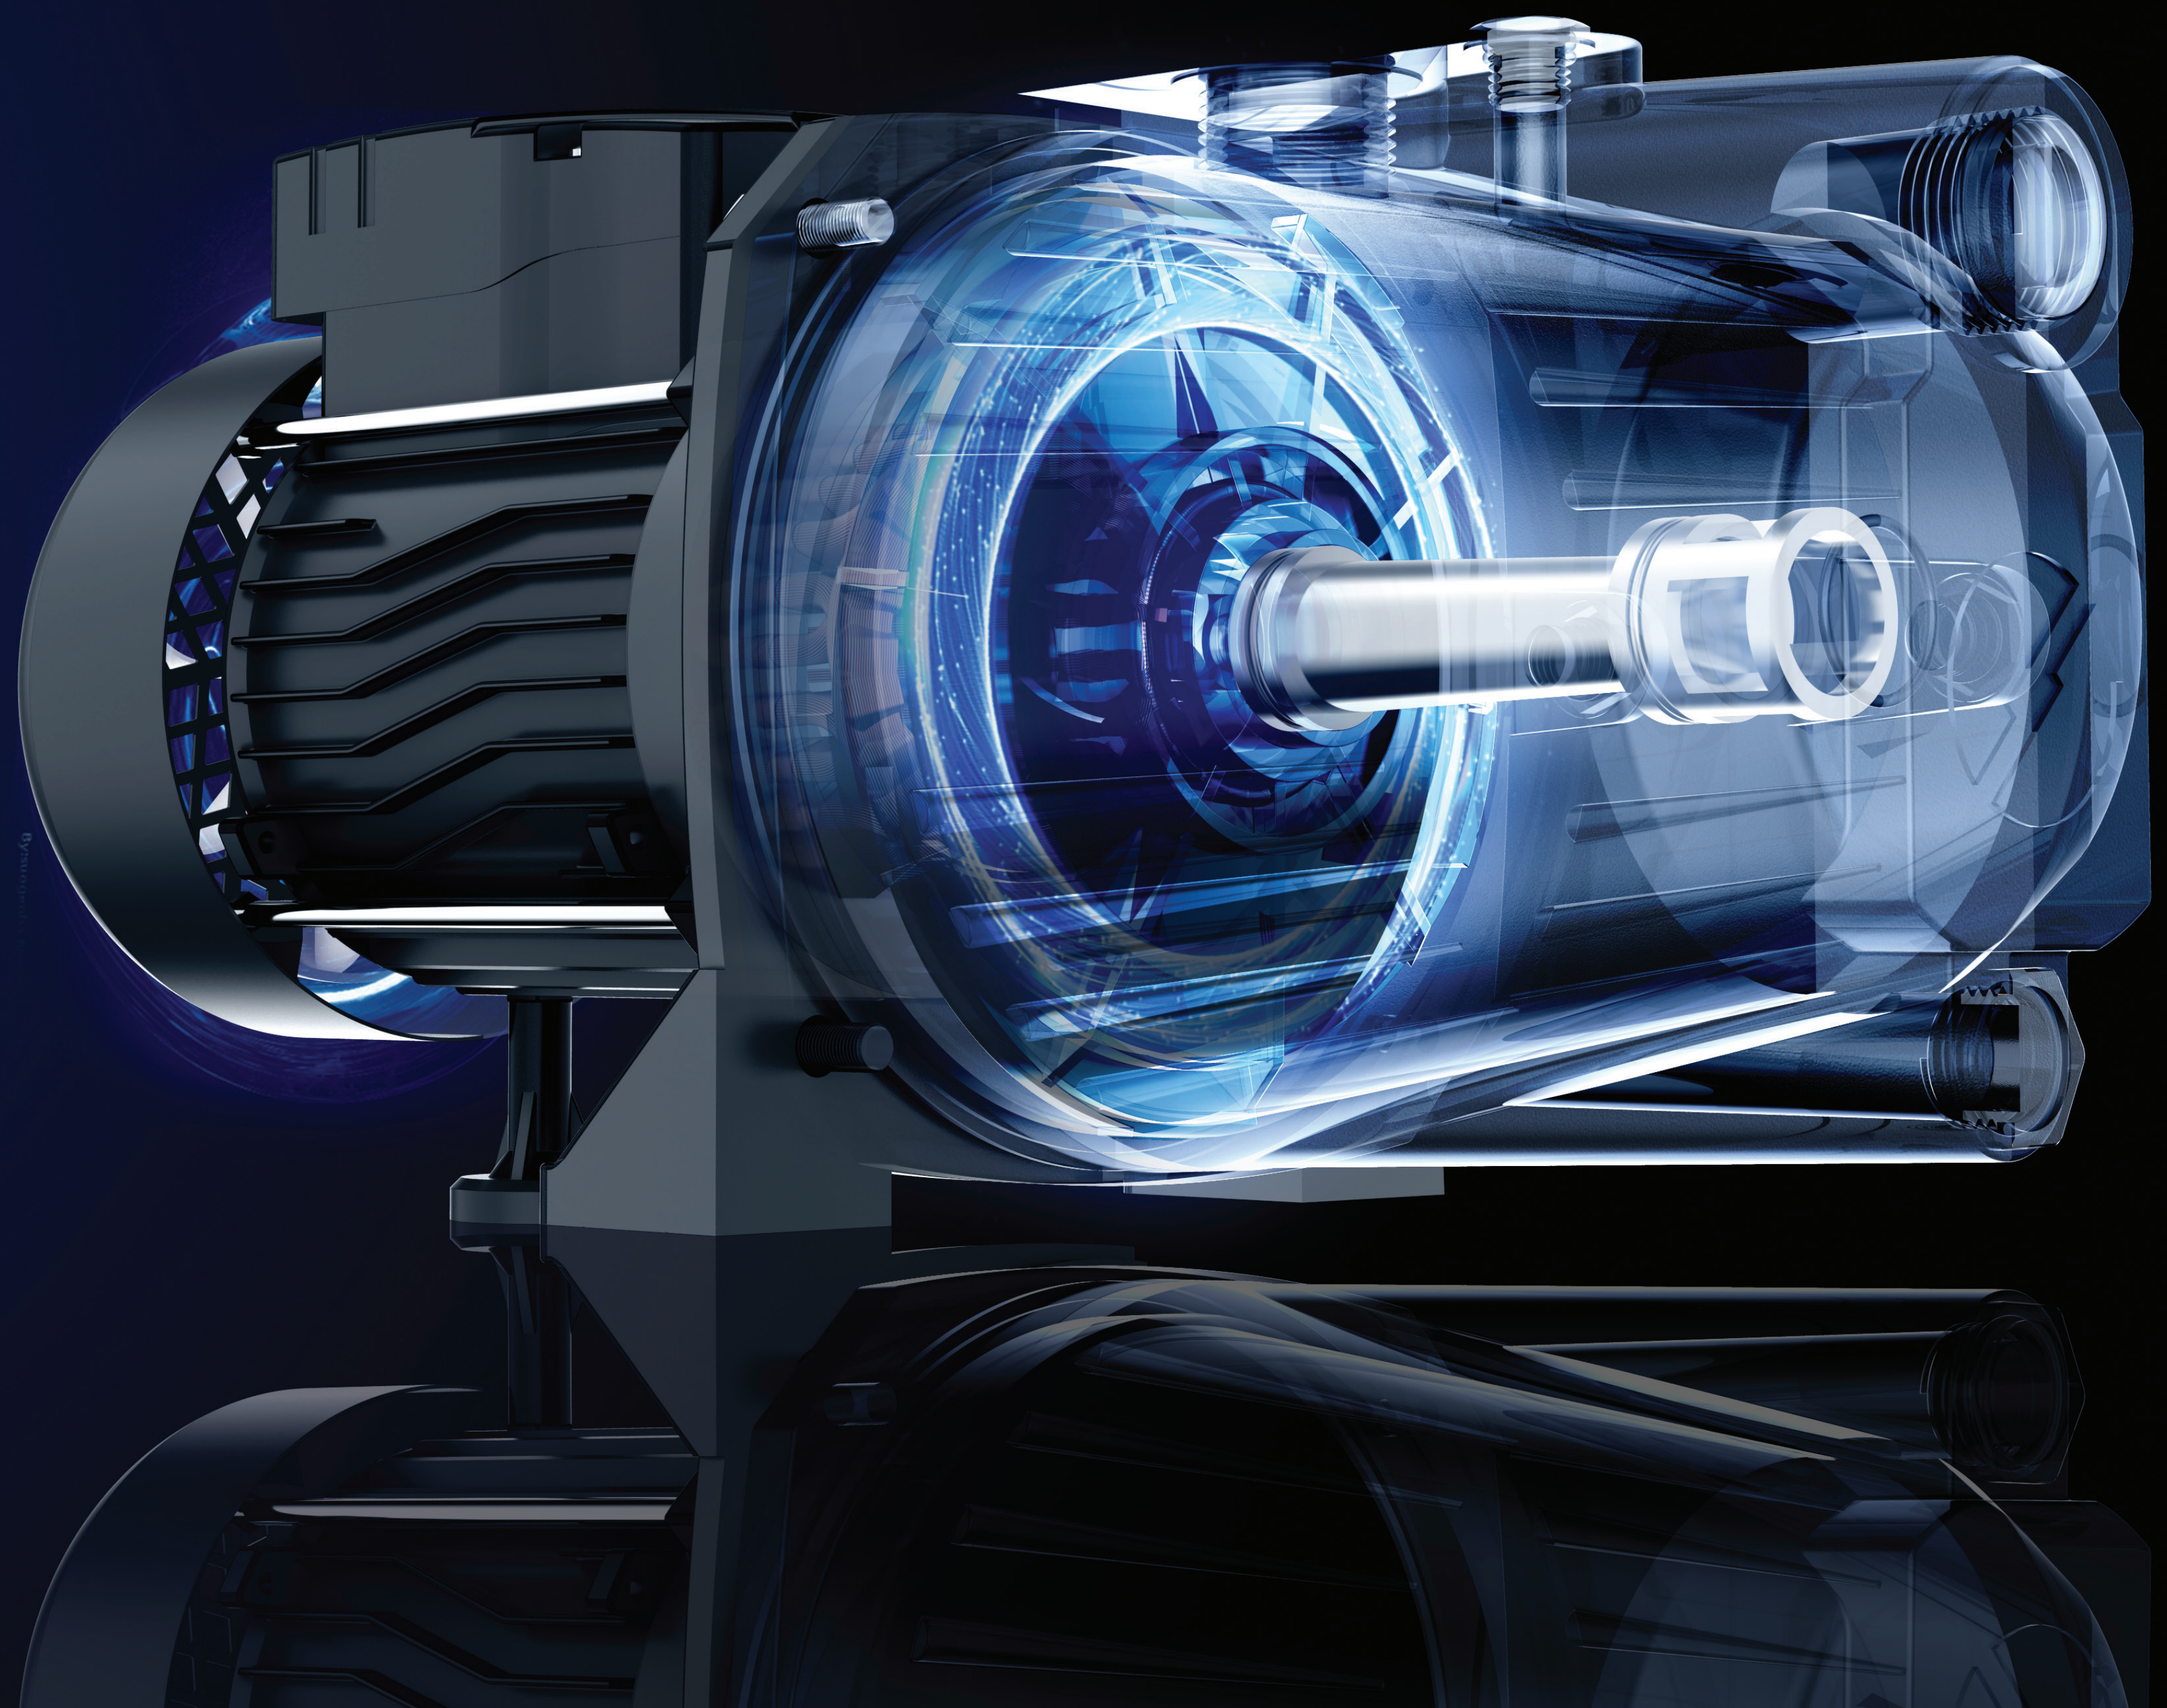

Pump

Stainless steel/Brass/PPO impeller
Max.liquid temperature: +40℃
Max.Suction: +9m
Cast iron pump body and support

Motor

Motor with copper winding
Shaft: Stainless steel welded shaft/45# steel shaft
Insulation Class: B or F
Protection class: IPX4
Max.Ambient temperature: +40℃
Cooling: External ventilation

Application

It can be used to transfer clean water or other liquid similar to water in physical and chemical properties. It is suitable for lifting water from the well, sprinkling irrigation in garden, pressure boosting of running water, and supporting equipment etc.

主要用途

它可以用于传输清洁水或其他物理和化学性质类似于水的液体。 它适用于从井中抽水，在花园中洒水，增加自来水的压力以及辅助设备等。

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

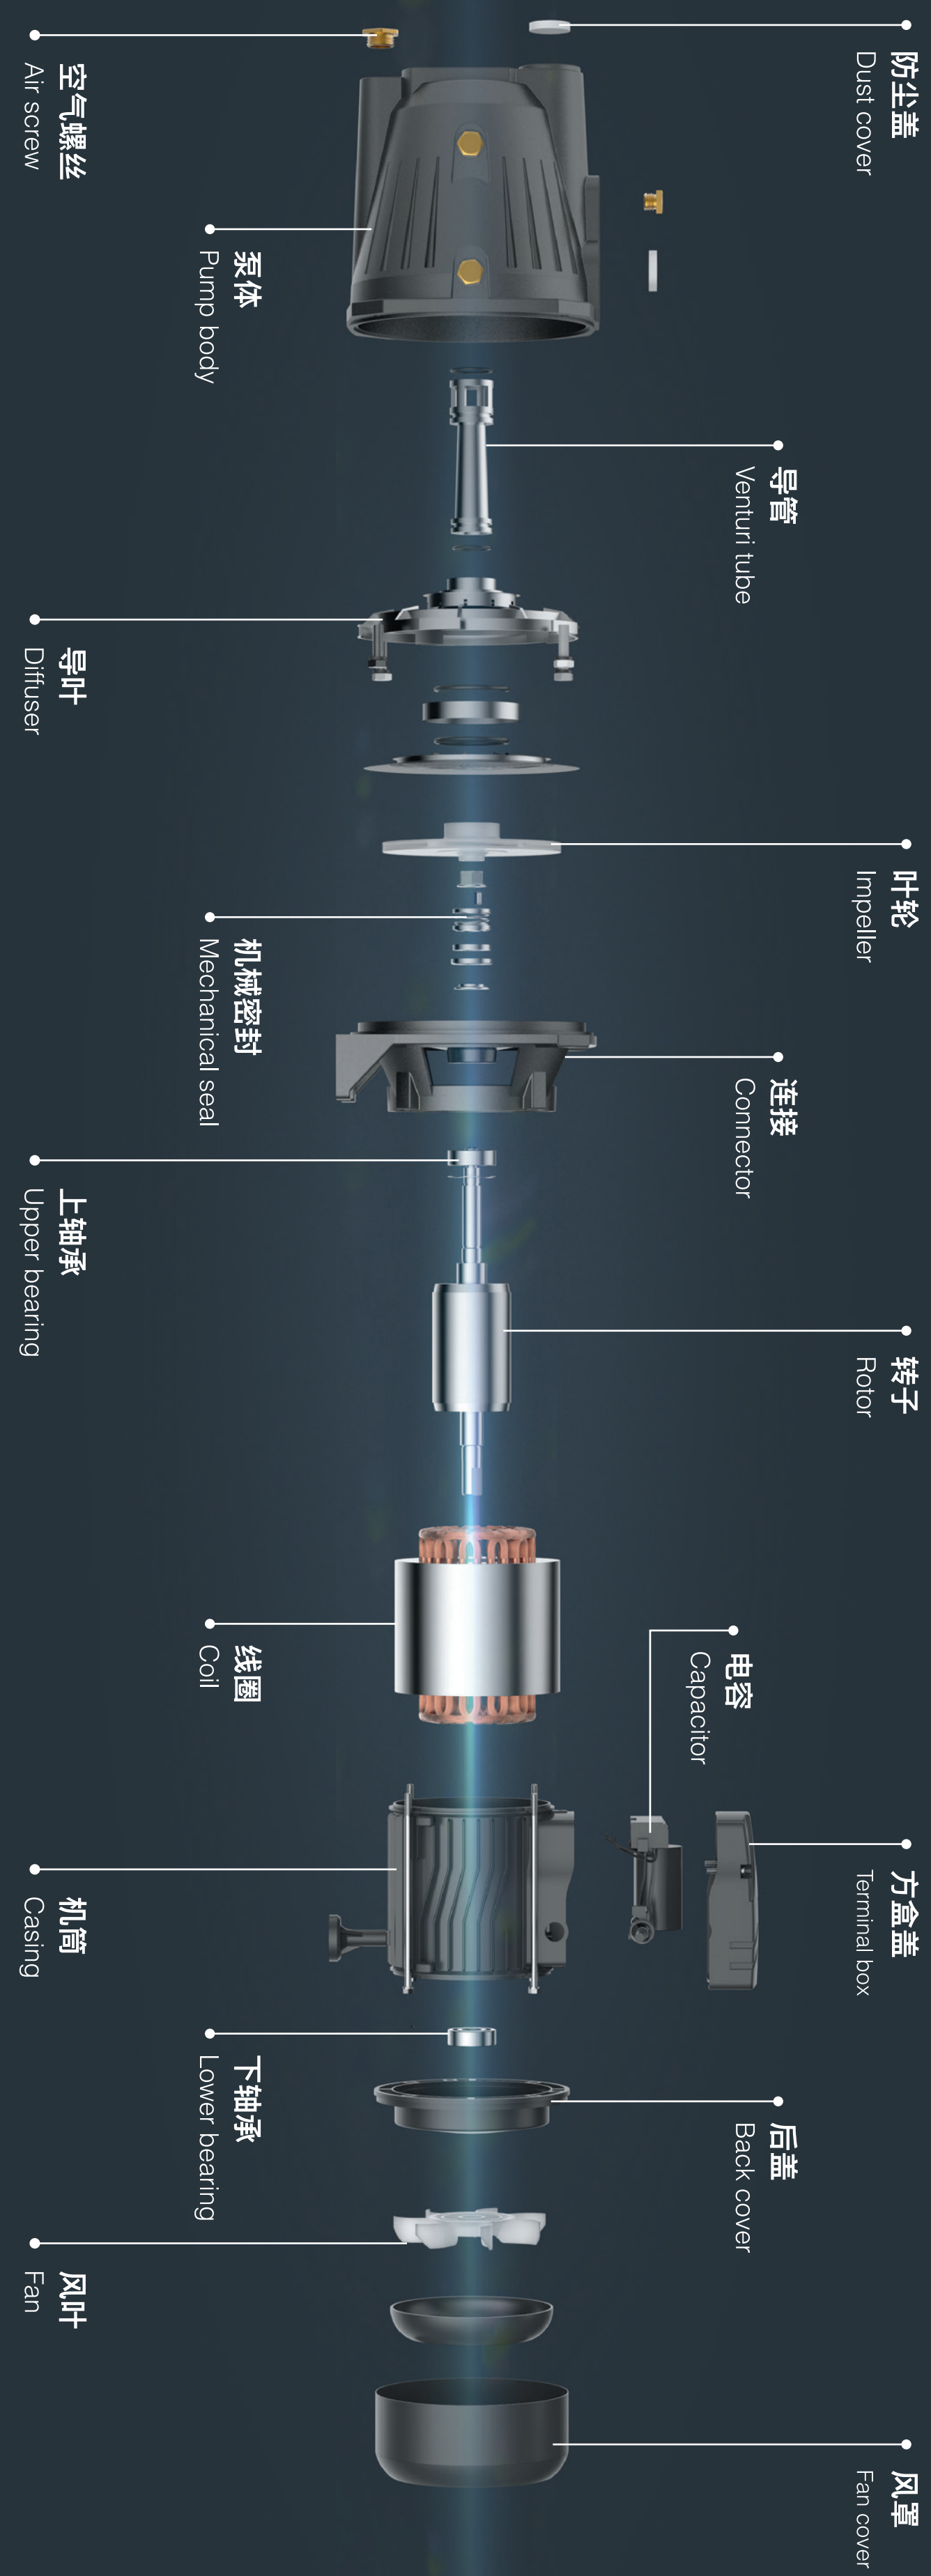

JET/ZGD
SELF PRIMING PUMP

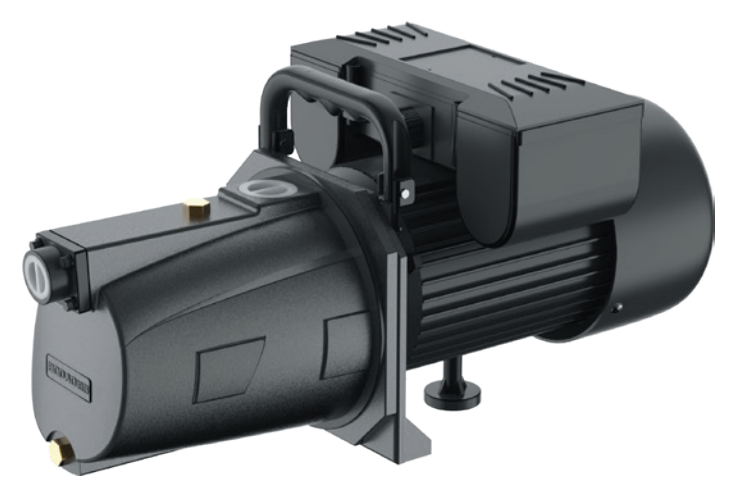

JET/ZGD 自吸喷射泵

Model	功率Power	扬程Max.Head	流量Max.Flow	口径Outlet	频率Frequency
JET-80	0.55kW	35m	2.7m³/h	25mm	50Hz/60Hz
JET-100	0.75kW	45m	3.7m³/h	25mm	50Hz/60Hz
JET-150	1.1kW	55m	4.7m³/h	40mm	50Hz/60Hz
JET-200	1.5kW	70m	5.7m³/h	50mm	50Hz/60Hz
ZGD-550	0.5kW	60m	3m³/h	25mm	50Hz/60Hz
ZGD-750	0.75kW	80m	4m³/h	25mm	50Hz/60Hz
ZGD-1100	1.1kW	100m	4m³/h	25mm	50Hz/60Hz
ZGD-1500	1.5kW	120m	4.5m³/h	25mm	50Hz/60Hz

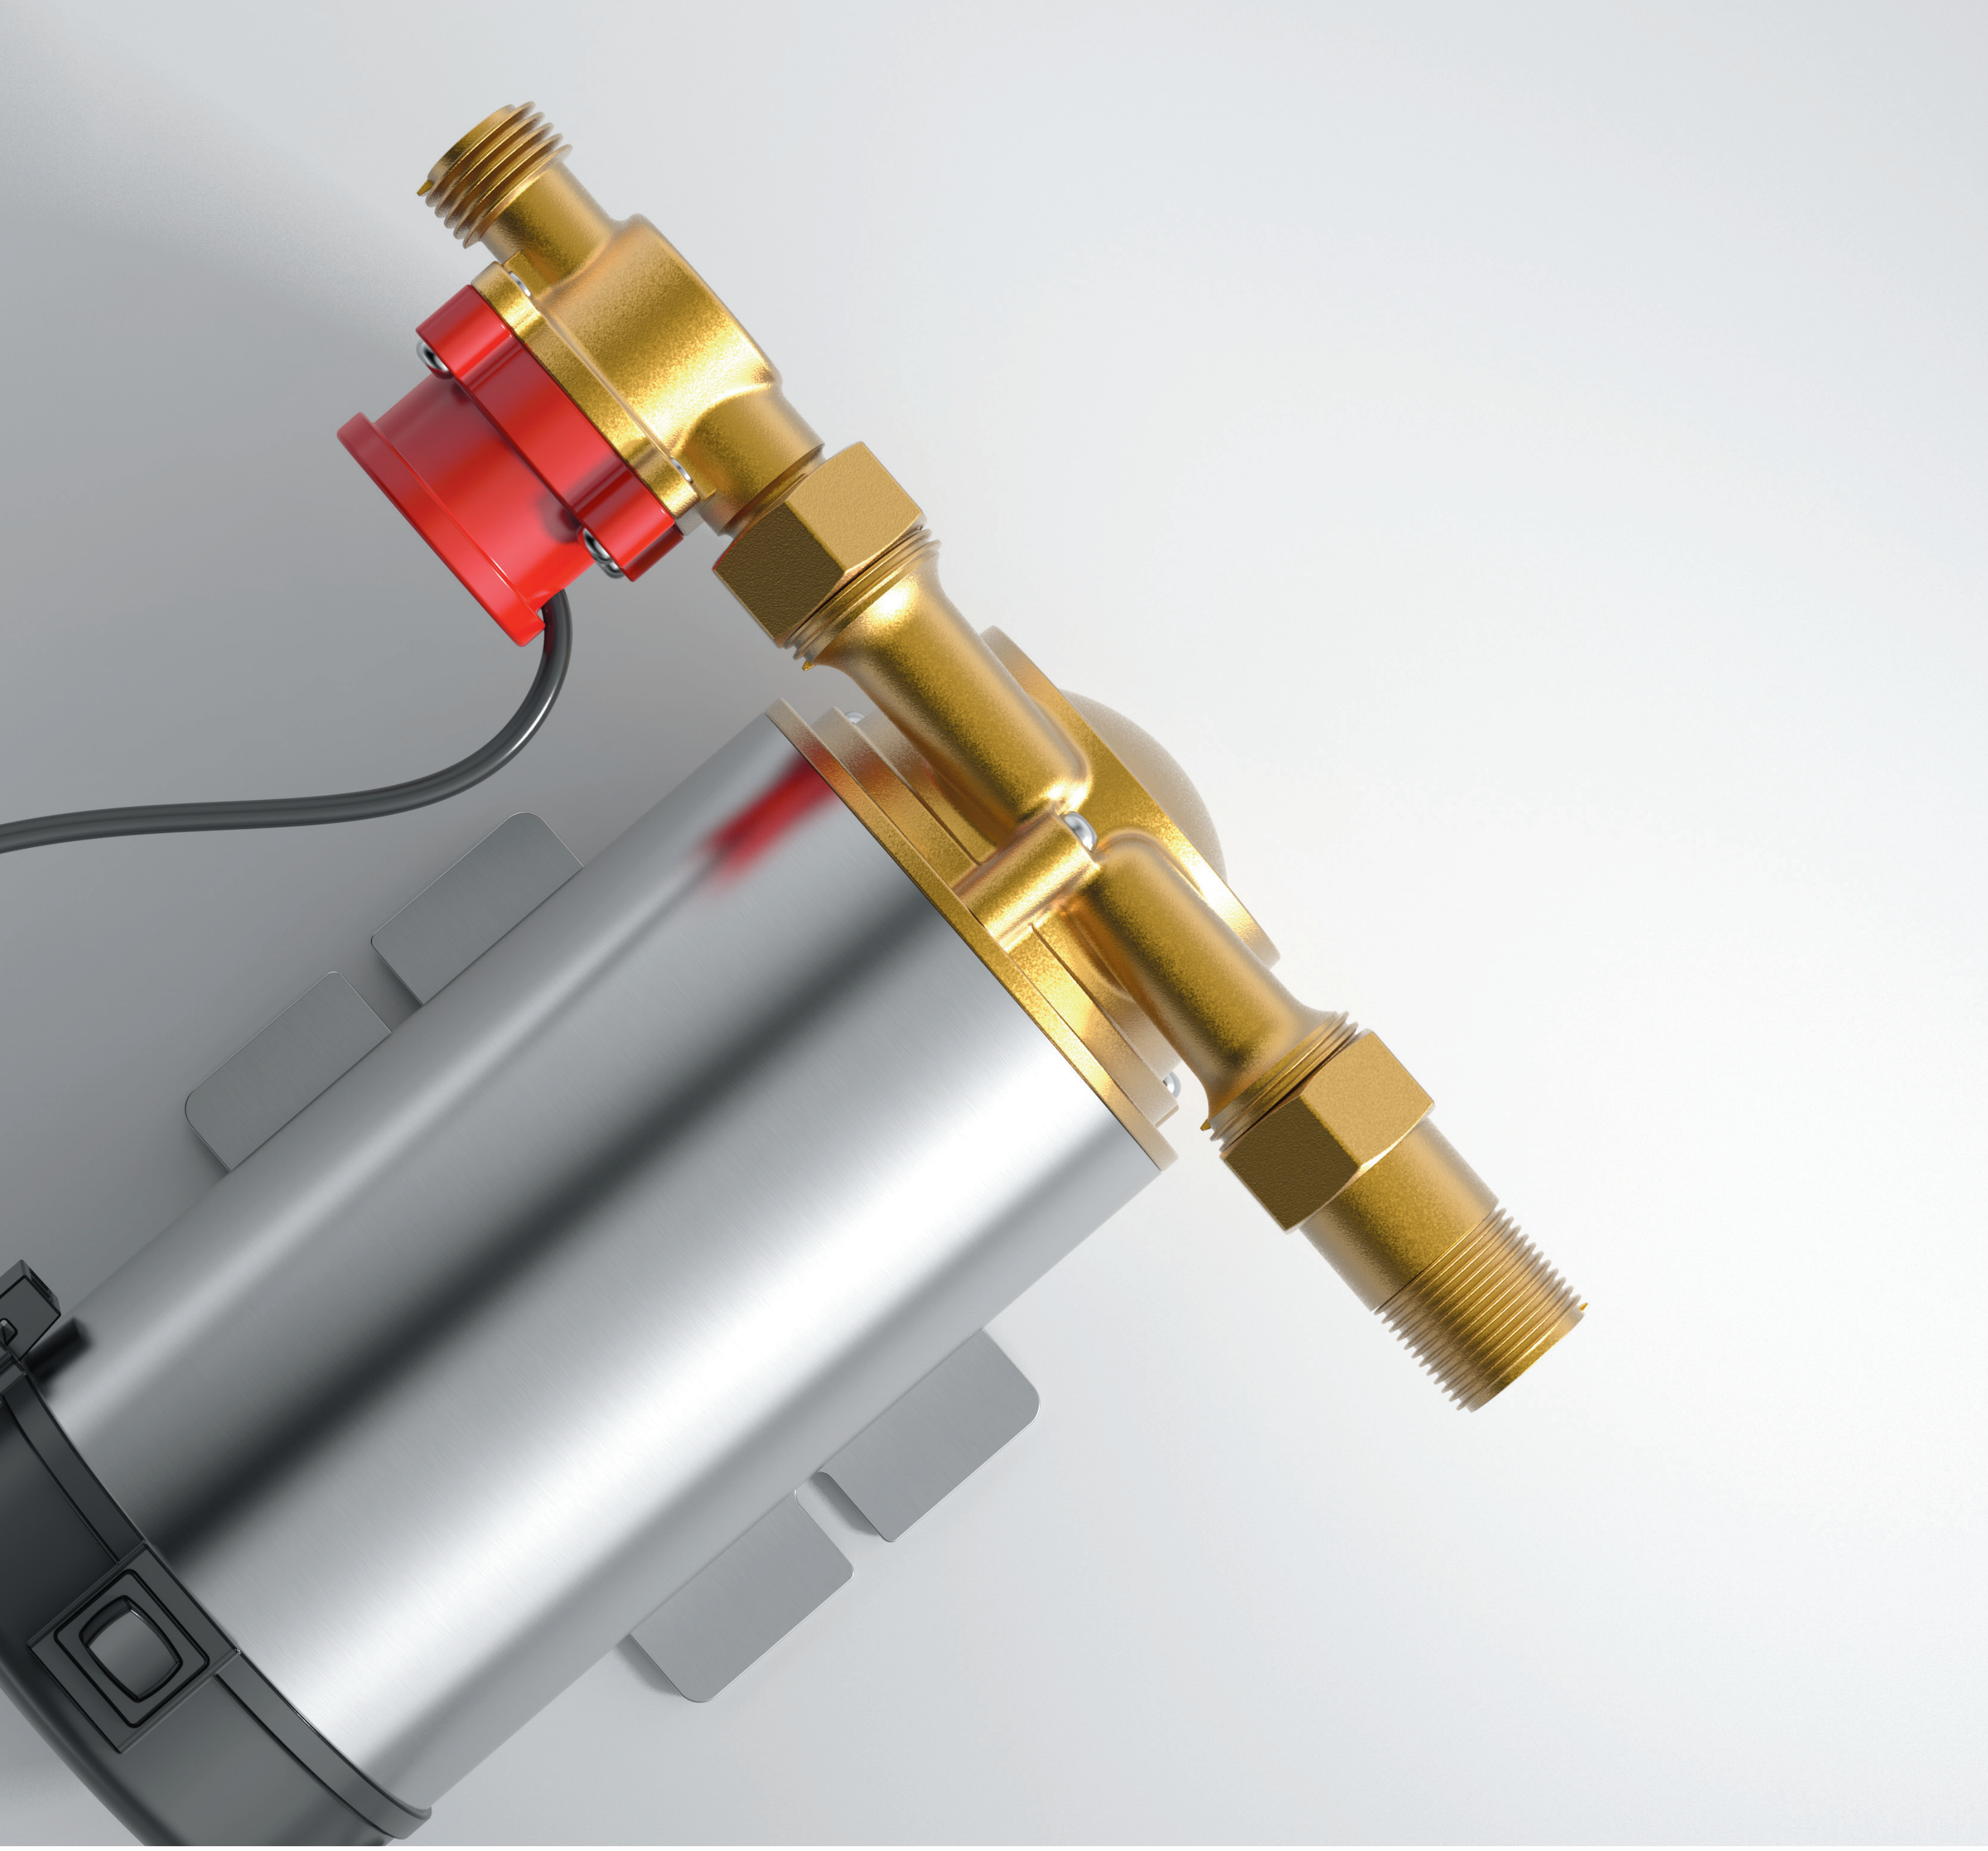

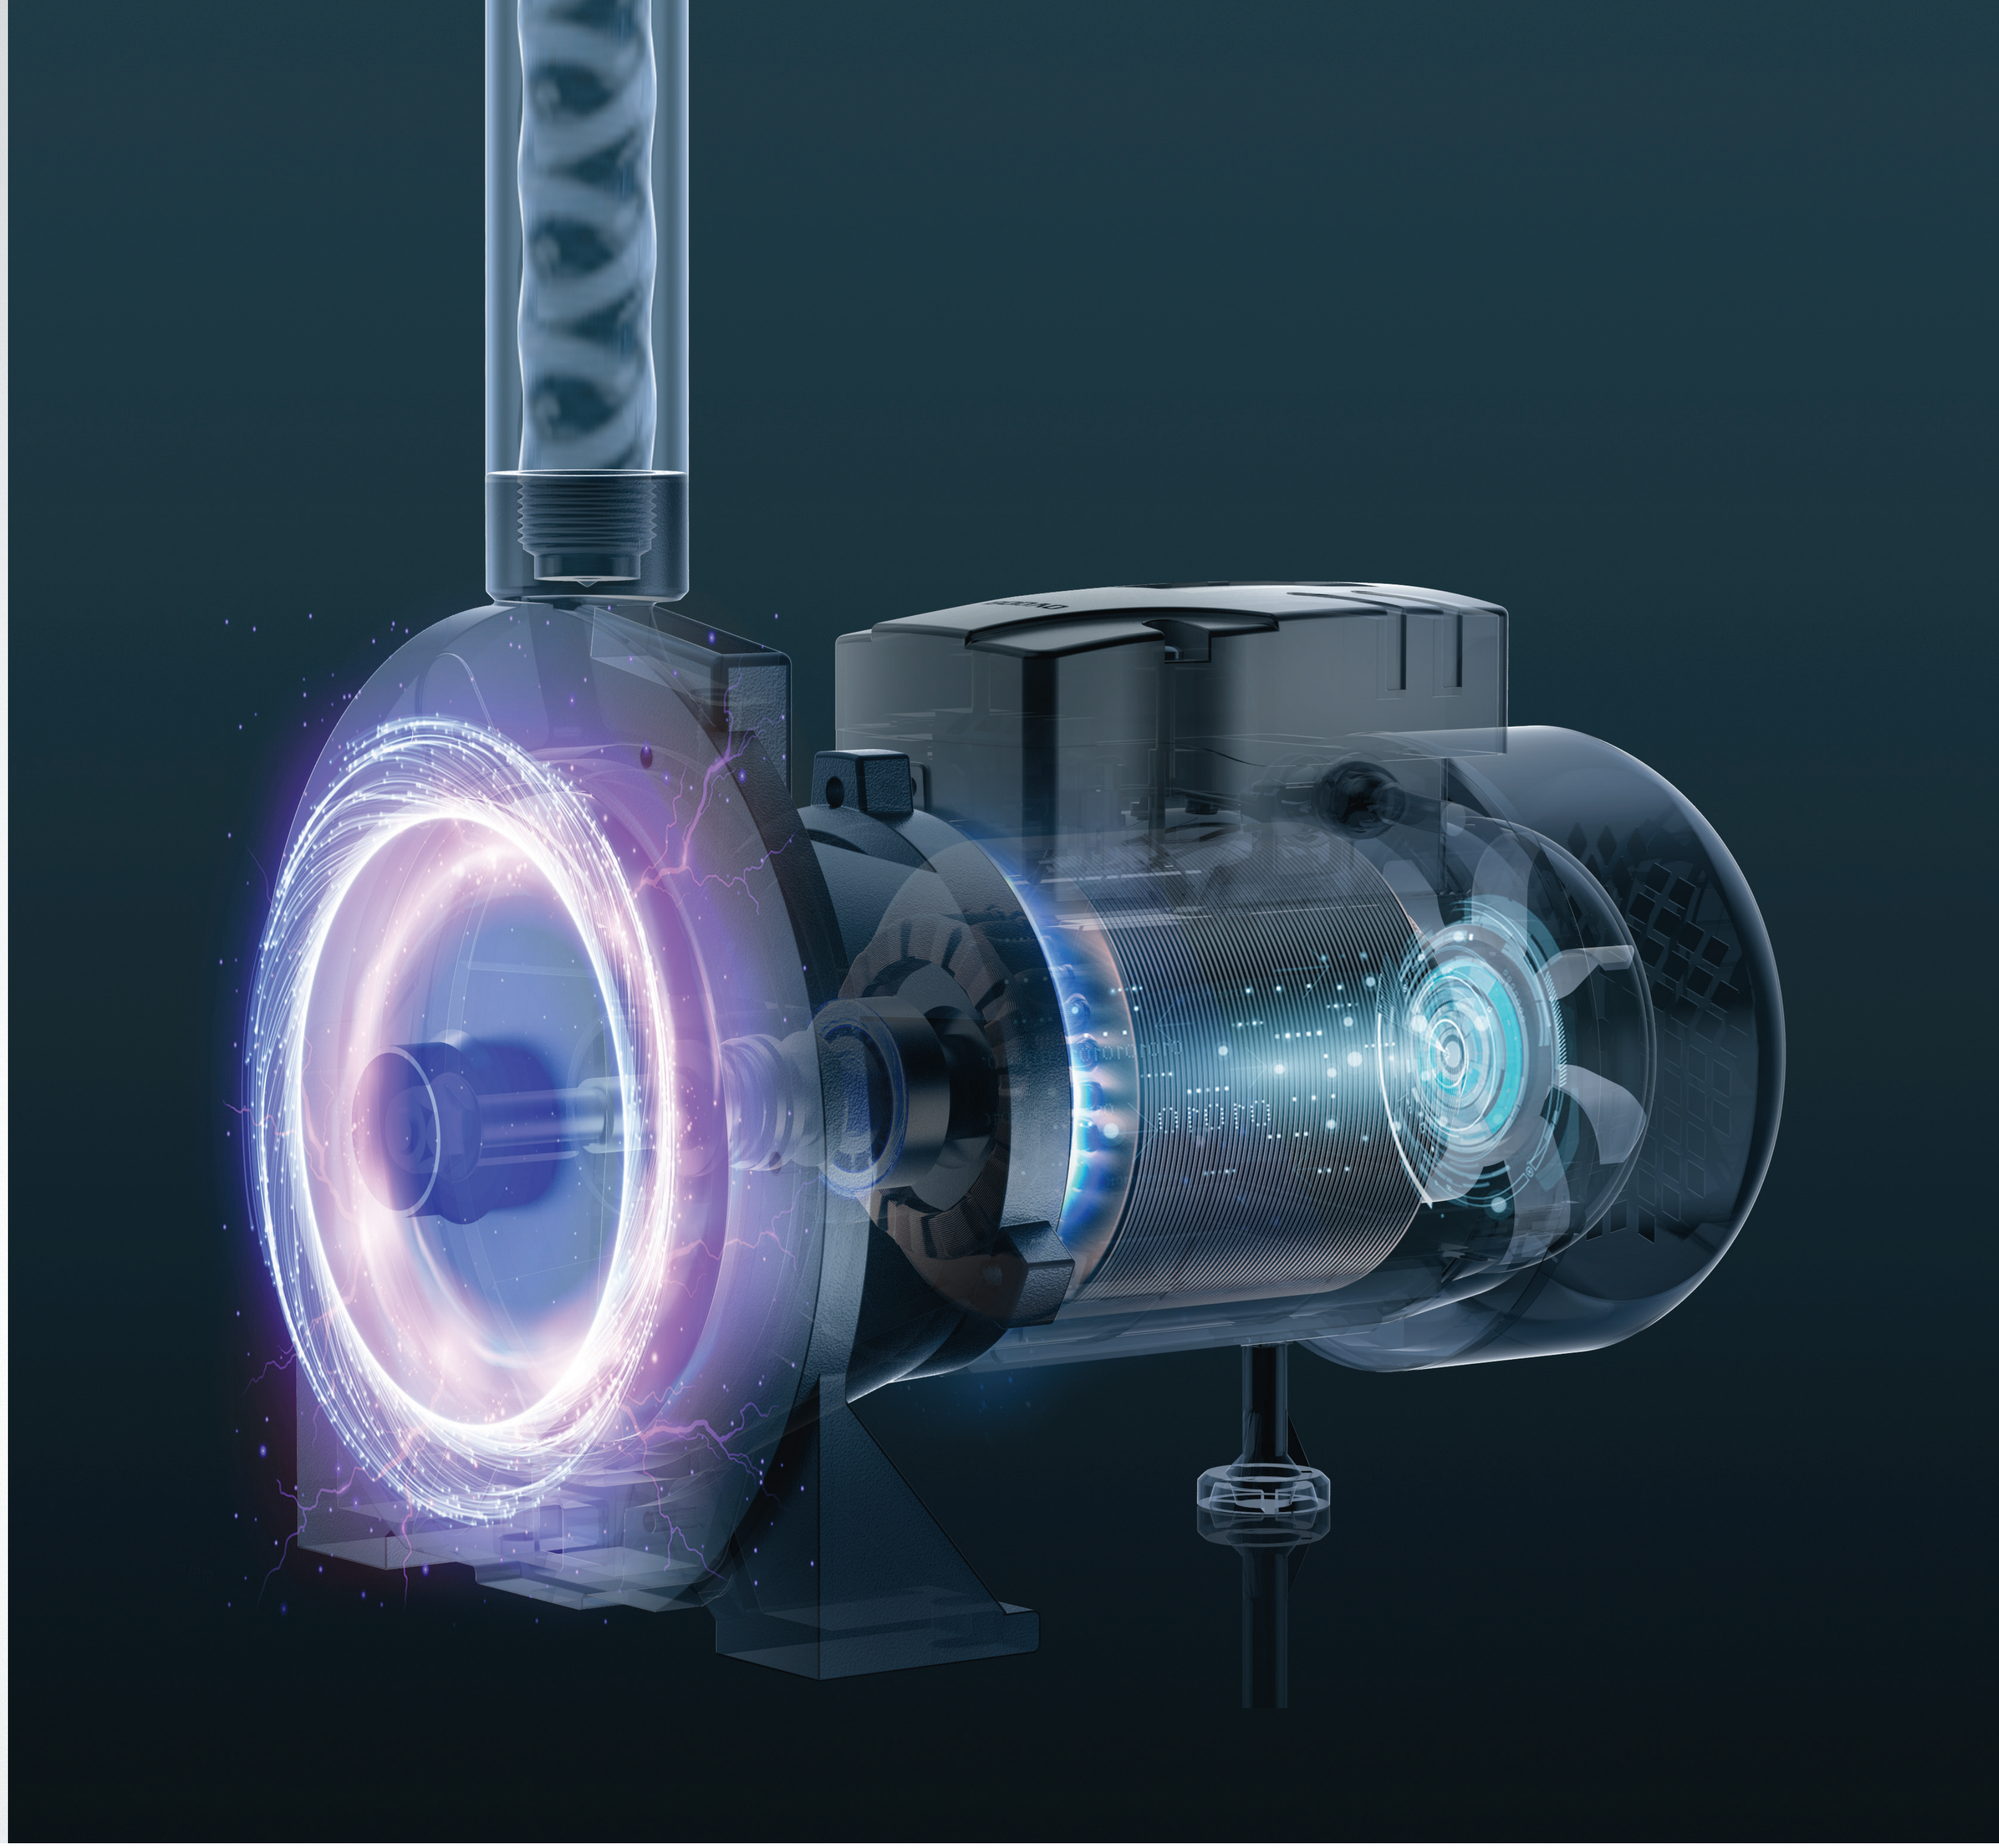

WZB

SMALL HOUSEHOLD SELF - PRIMING BOOSTER PUMP

小型家用自吸增压泵

15WBX0.6-10	功率Power: 100W 扬程Max.Head: 10m 流量Max.Flow: $0.6m^3/h$ 口径Outlet: 15mm 频率Frequency: 50Hz/60Hz	**15WBX0.8-14**	功率Power: 150W 扬程Max.Head: 14m 流量Max.Flow: $0.8m^3/h$ 口径Outlet: 15mm 频率Frequency: 50Hz/60Hz

2MCP

CENTRIFUGAL PUMP

2MCP 离心泵

PRODUCT

BREAKDOWN DIAGRAM

产品分解图

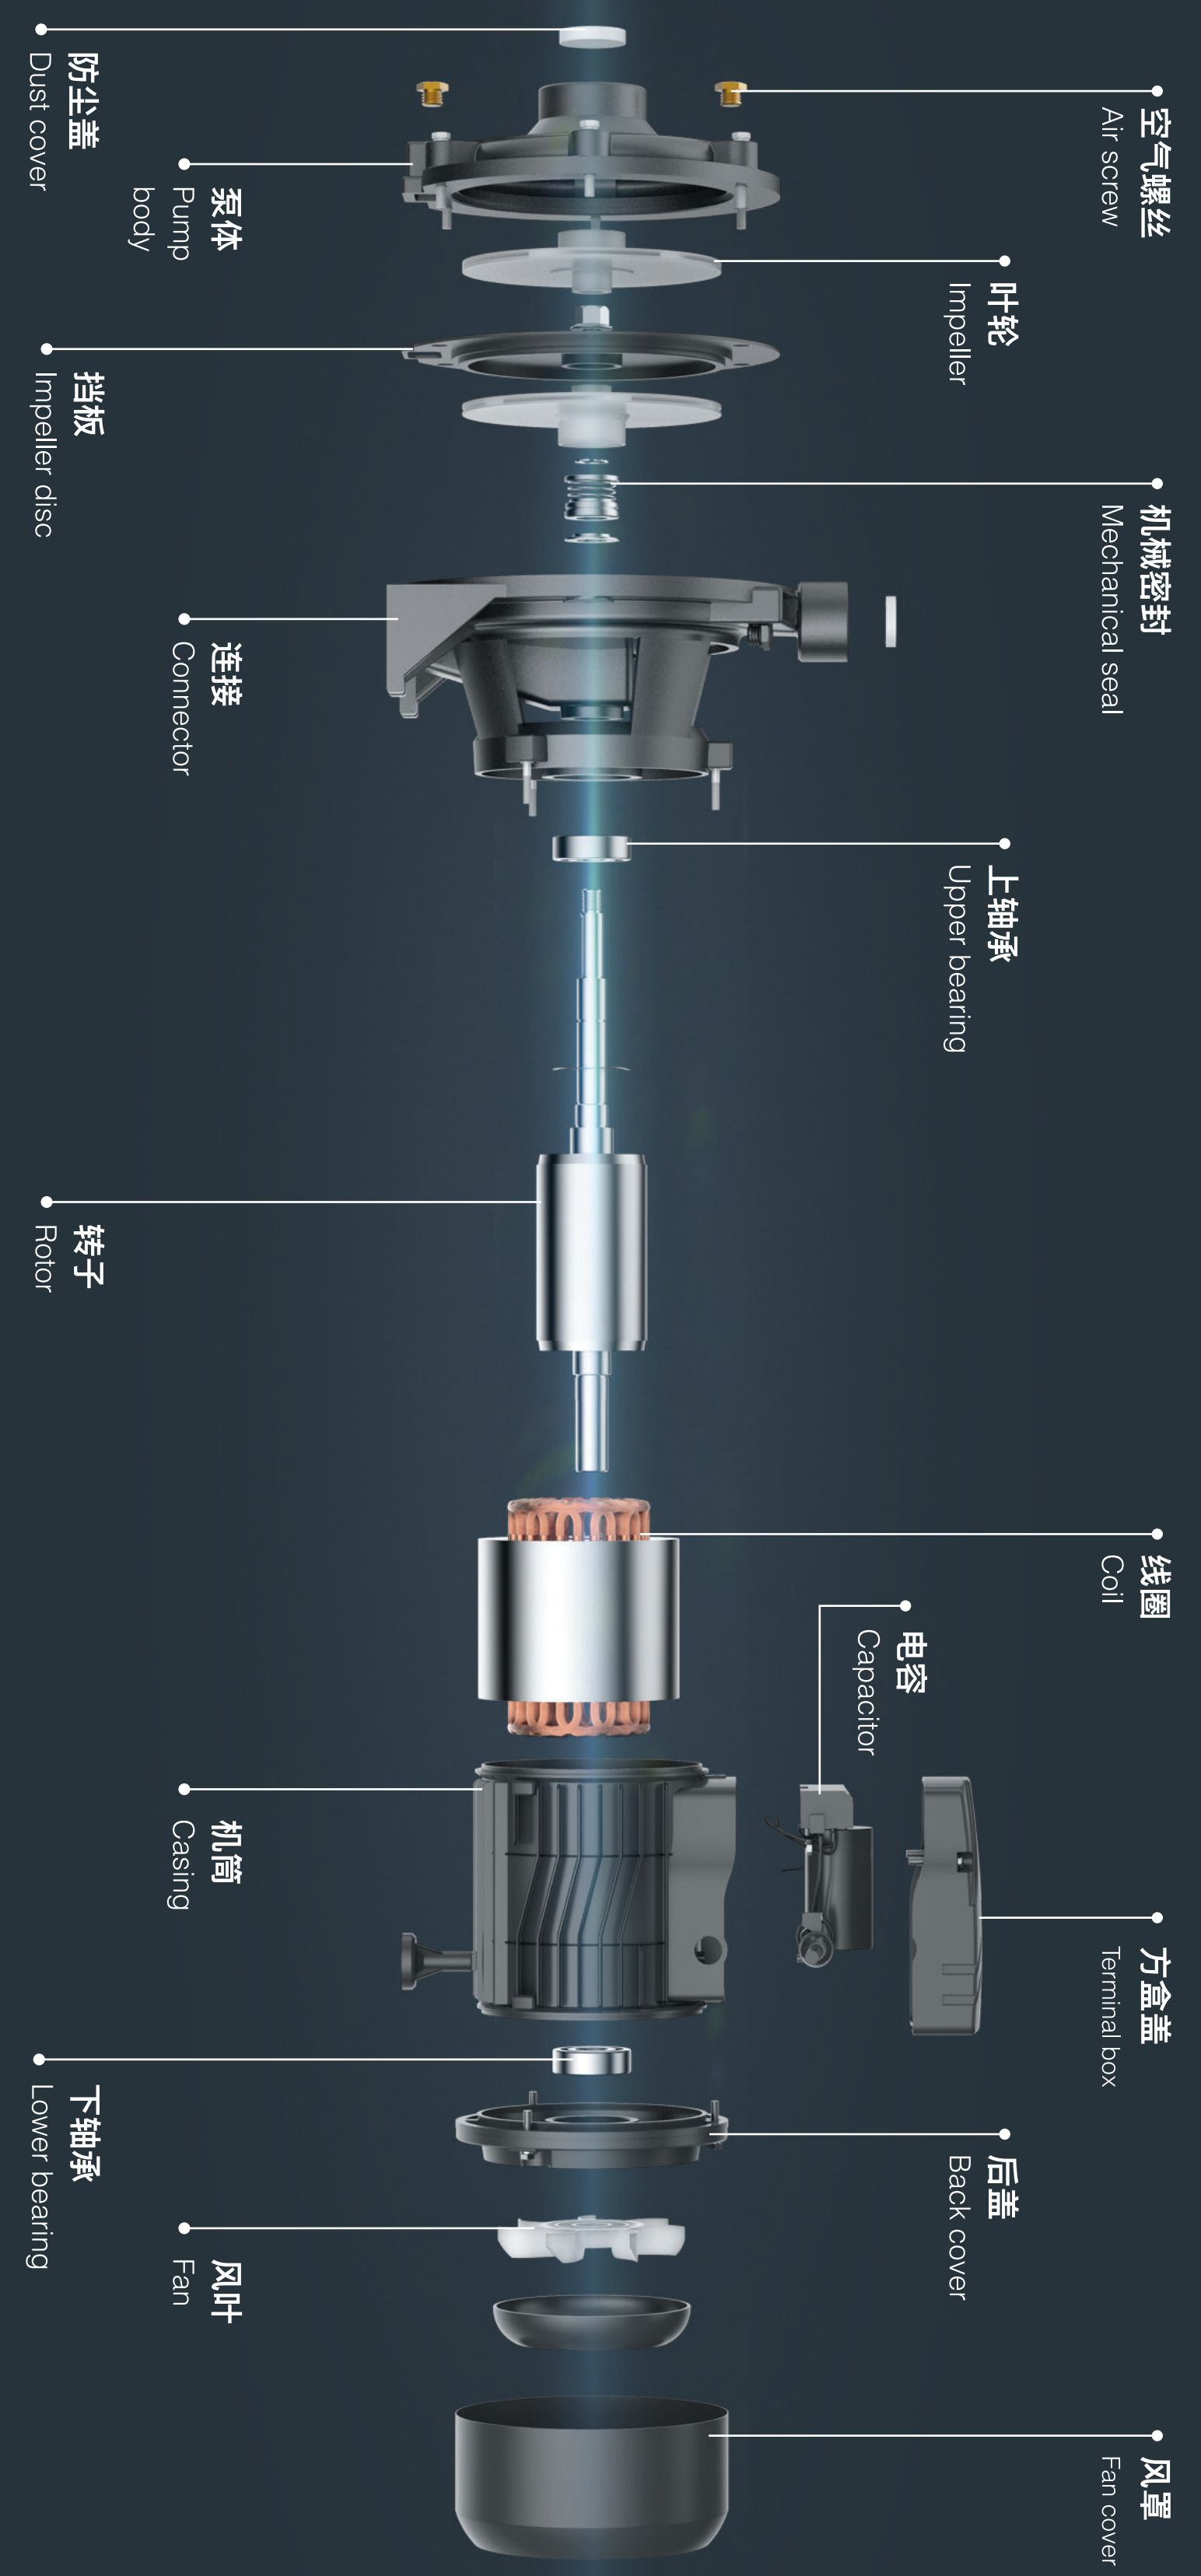

SCM/2MCP 离心泵

SCM-22	功率Power: 0.37kW 扬程Max.Head: 22m 流量Max.Flow: 80L/min 频率Frequency: 50Hz/60Hz	**SCM-42**	功率Power: 0.55kW 扬程Max.Head: 25m 流量Max.Flow: 95L/min 频率Frequency: 50Hz/60Hz	**SCM-50**	功率Power: 0.75kW 扬程Max.Head: 32m 流量Max.Flow: 120L/min 频率Frequency: 50Hz/60Hz
2MCP25/140	功率Power: 1.1kW 扬程Max.Head: 40m 流量Max.Flow: 110L/min 频率Frequency: 50Hz/60Hz	**2MCP160/160**	功率Power: 1.5kW 扬程Max.Head: 55m 流量Max.Flow: 120L/min 频率Frequency: 50Hz/60Hz	**2MCP160/160B**	功率Power: 1.5kW 扬程Max.Head: 55m 流量Max.Flow: 120L/min 频率Frequency: 50Hz/60Hz
2MCP180/180	功率Power: 2.2kW 扬程Max.Head: 65m 流量Max.Flow: 130L/min 频率Frequency: 50Hz/60Hz	**2MCP50/200**	功率Power: 1.5kW 扬程Max.Head: 60m 流量Max.Flow: 110L/min 频率Frequency: 50Hz/60Hz	**2MCP50/300**	功率Power: 2.2kW 扬程Max.Head: 65m 流量Max.Flow: 160L/min 频率Frequency: 50Hz/60Hz

QB/QTM 旋涡泵

QB60-1	功率Power: 0.37kW 扬程Max.Head: 35m 流量Max.Flow: 35L/min 频率Frequency: 50Hz/60Hz	**QB70-1**	功率Power: 0.55kW 扬程Max.Head: 45m 流量Max.Flow: 50L/min 频率Frequency: 50Hz/60Hz	**QB80-1**	功率Power: 0.75kW 扬程Max.Head: 50m 流量Max.Flow: 60L/min 频率Frequency: 50Hz/60Hz
QB60	功率Power: 0.37kW 扬程Max.Head: 35m 流量Max.Flow: 35L/min 频率Frequency: 50Hz/60Hz	**QB70**	功率Power: 0.55kW 扬程Max.Head: 45m 流量Max.Flow: 50L/min 频率Frequency: 50Hz/60Hz	**QB80**	功率Power: 0.75kW 扬程Max.Head: 50m 流量Max.Flow: 60L/min 频率Frequency: 50Hz/60Hz
QTM60	功率Power: 0.37kW 扬程Max.Head: 35m 流量Max.Flow: 35L/min 频率Frequency: 50Hz/60Hz	**QTM70**	功率Power: 0.55kW 扬程Max.Head: 45m 流量Max.Flow: 50L/min 频率Frequency: 50Hz/60Hz	**QTM80**	功率Power: 0.75kW 扬程Max.Head: 50m 流量Max.Flow: 60L/min 频率Frequency: 50Hz/60Hz

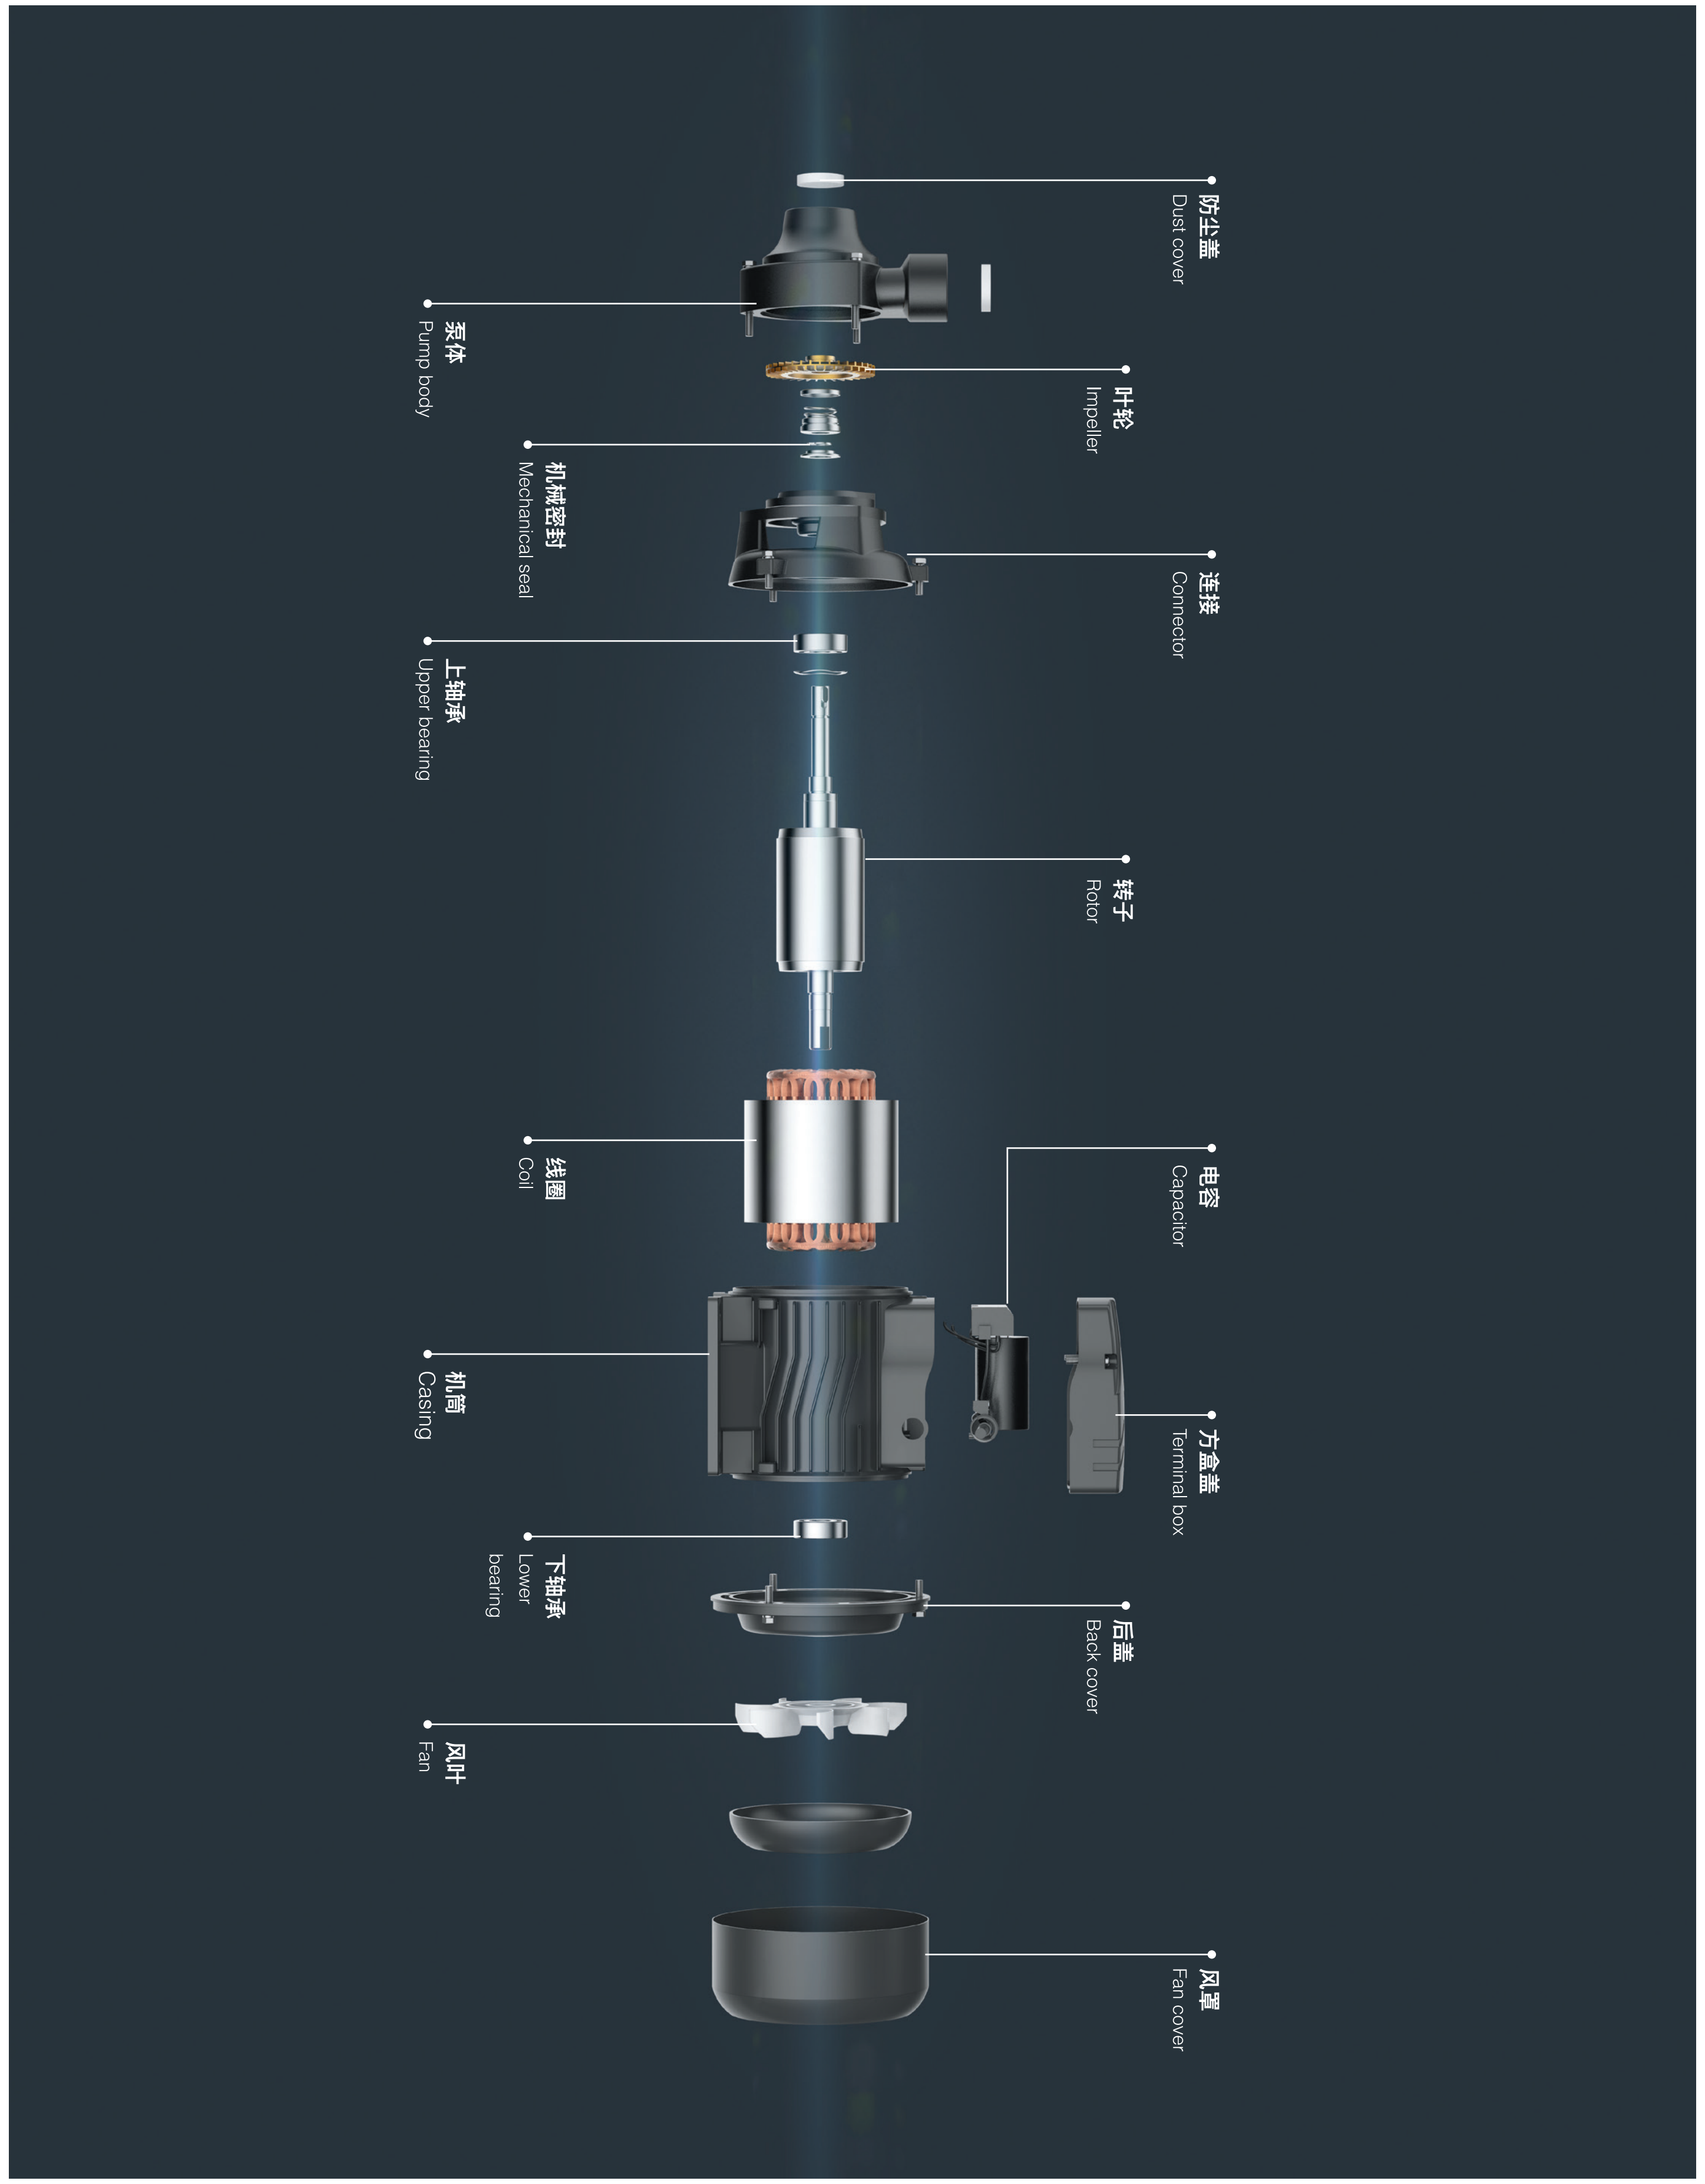

STAINLESS STEEL
CENTRIFUGAL PUMP
不锈钢离心泵

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

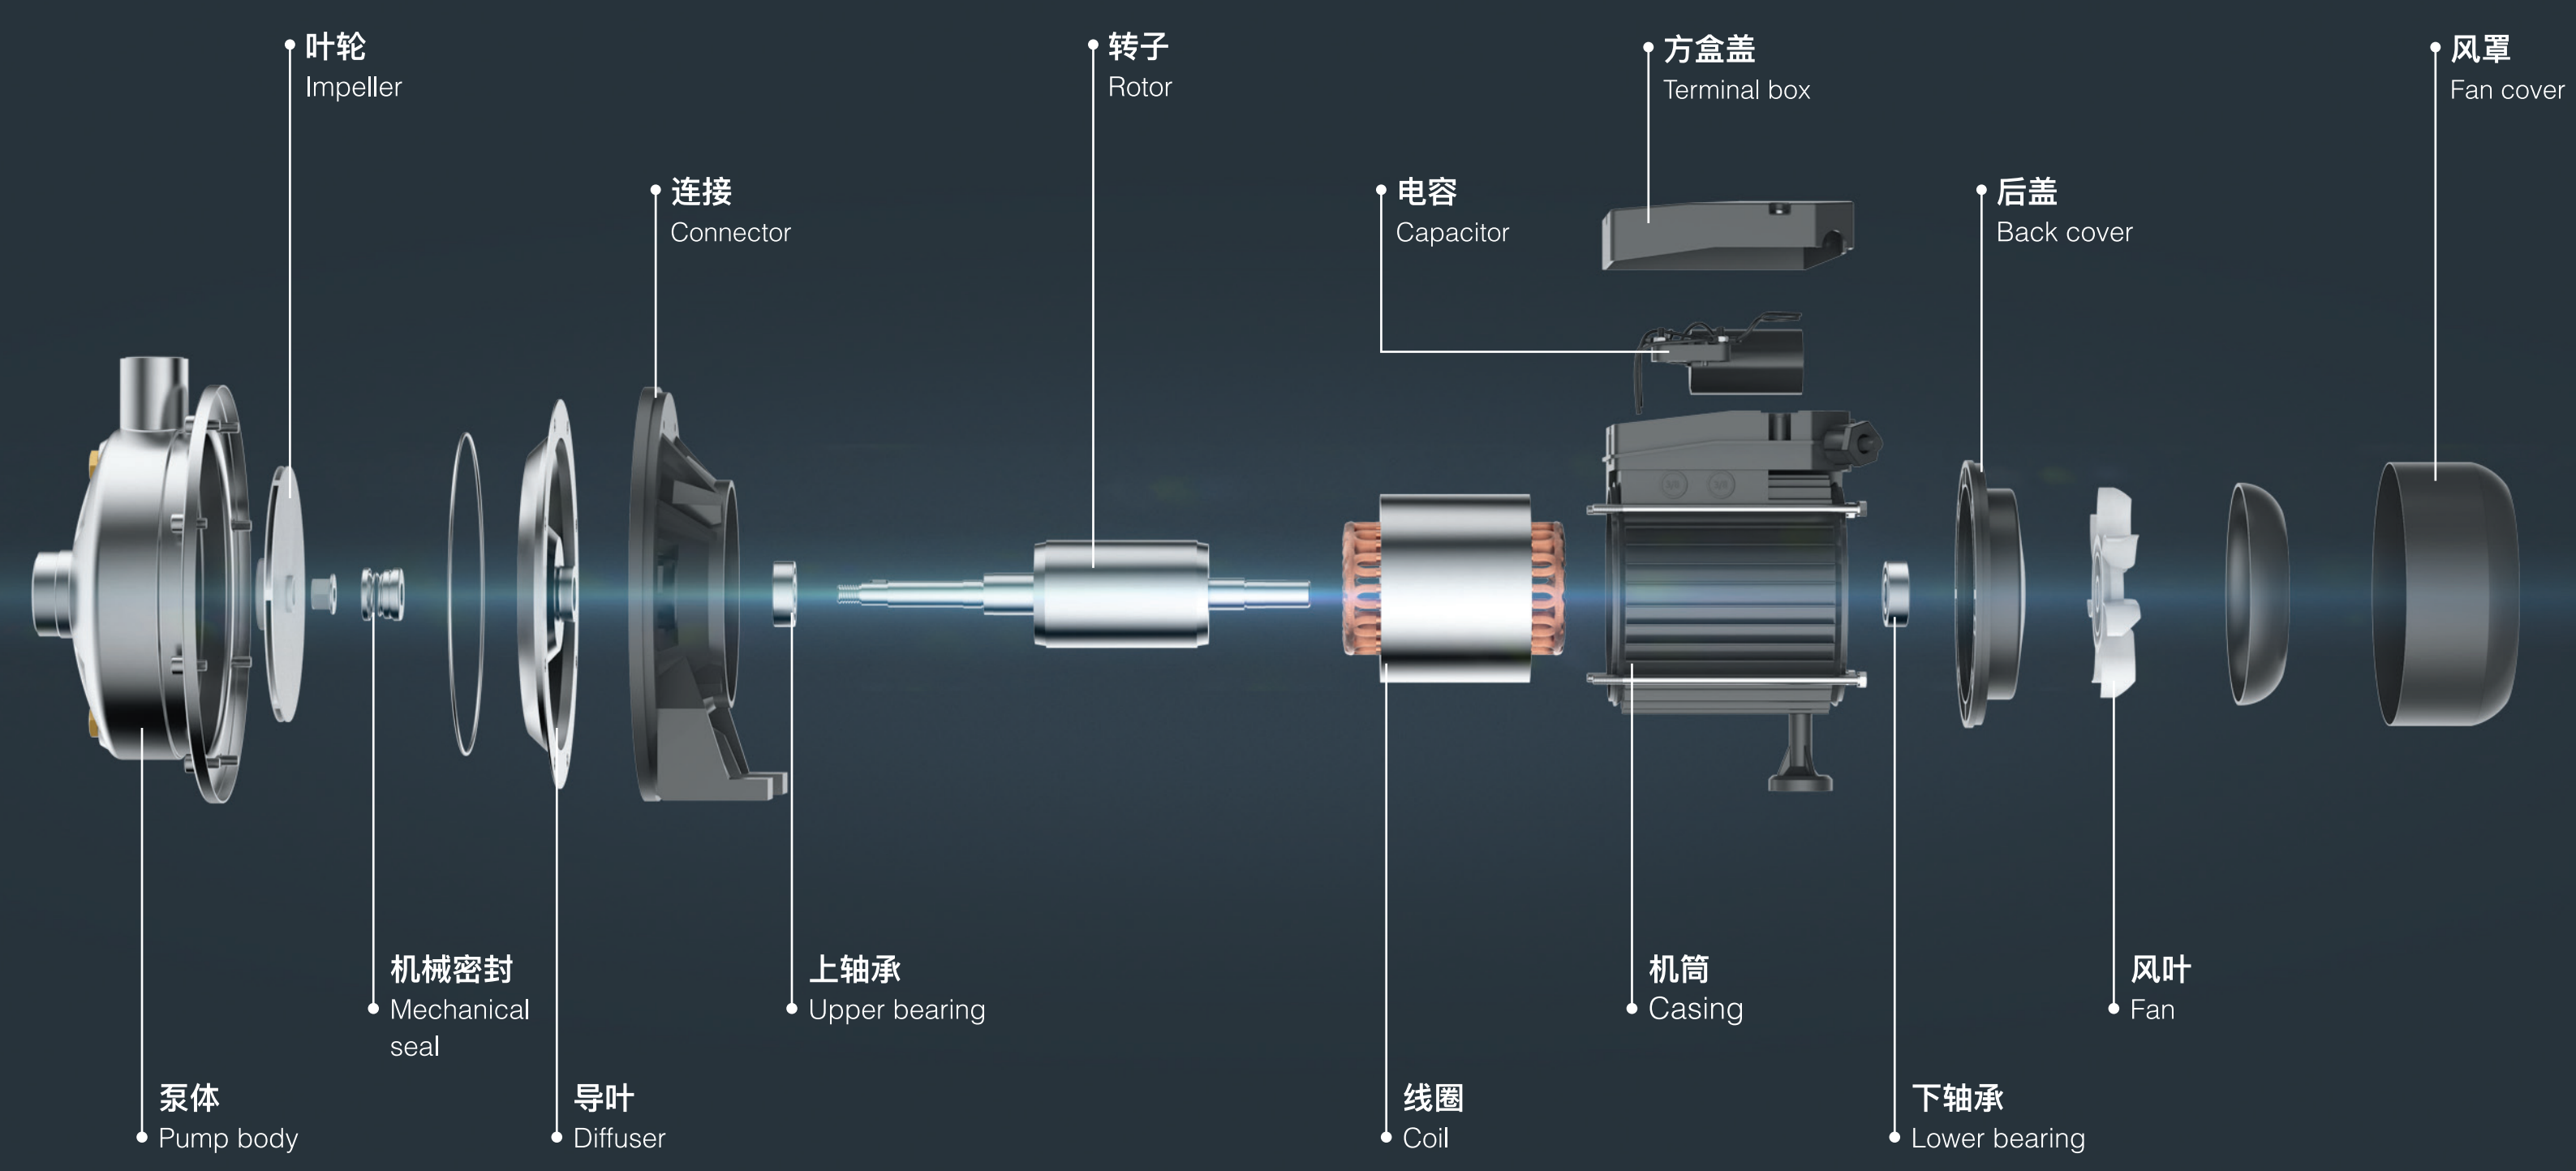

不锈钢离心泵

WB70/037D	功率Power: 0.37kW	扬程Max.Head: 16m	流量Max.Flow: 120L/min	频率Frequency: 50Hz/60Hz					
WB70/055D	功率Power: 0.55kW	扬程Max.Head: 19m	流量Max.Flow: 120L/min	频率Frequency: 50Hz/60Hz					
WB70/075D	功率Power: 0.75kW	扬程Max.Head: 25m	流量Max.Flow: 120L/min	频率Frequency: 50Hz/60Hz					
WB70/090D	功率Power: 0.9kW	扬程Max.Head: 29m	流量Max.Flow: 120L/min	频率Frequency: 50Hz/60Hz					
WB70/110D	功率Power: 1.1kW	扬程Max.Head: 33m	流量Max.Flow: 120L/min	频率Frequency: 50Hz/60Hz					
WB120/075D	功率Power: 0.75kW	扬程Max.Head: 19m	流量Max.Flow: 180L/min	频率Frequency: 50Hz/60Hz					
WB120/110D	功率Power: 1.1kW	扬程Max.Head: 26m	流量Max.Flow: 180L/min	频率Frequency: 50Hz/60Hz					
WB120/150D	功率Power: 1.5kW	扬程Max.Head: 31m	流量Max.Flow: 180L/min	频率Frequency: 50Hz/60Hz					
WB120/185D	功率Power: 1.85kW	扬程Max.Head: 37m	流量Max.Flow: 180L/min	频率Frequency: 50Hz/60Hz					

MHF SERIES

CENTRIFUGAL PUMP

离心泵

MHF5B	功率Power: 0.75kW 扬程Max.Head: 13.5m 流量Max.Flow: 350L/min 频率Frequency: 50Hz/60Hz	**MHF5A**	功率Power: 1.1kW 扬程Max.Head: 15m 流量Max.Flow: 400L/min 频率Frequency: 50Hz/60Hz	**MHF5AM**	功率Power: 1.5kW 扬程Max.Head: 18m 流量Max.Flow: 450L/min 频率Frequency: 50Hz/60Hz
MHF6C	功率Power: 1.1kW 扬程Max.Head: 14m 流量Max.Flow: 500L/min 频率Frequency: 50Hz/60Hz	**MHF6B**	功率Power: 1.5kW 扬程Max.Head: 14m 流量Max.Flow: 750L/min 频率Frequency: 50Hz/60Hz	**MHF6A**	功率Power: 2.2kW 扬程Max.Head: 15m 流量Max.Flow: 800L/min 频率Frequency: 50Hz/60Hz
MHF6AR	功率Power: 3.0kW 扬程Max.Head: 12m 流量Max.Flow: 900L/min 频率Frequency: 50Hz/60Hz	**MHF6AF-A**	功率Power: 1.5kW 扬程Max.Head: 15m 流量Max.Flow: 450L/min 频率Frequency: 50Hz/60Hz	**MHF6AF-B**	功率Power: 2.2kW 扬程Max.Head: 15m 流量Max.Flow: 850L/min 频率Frequency: 50Hz/60Hz

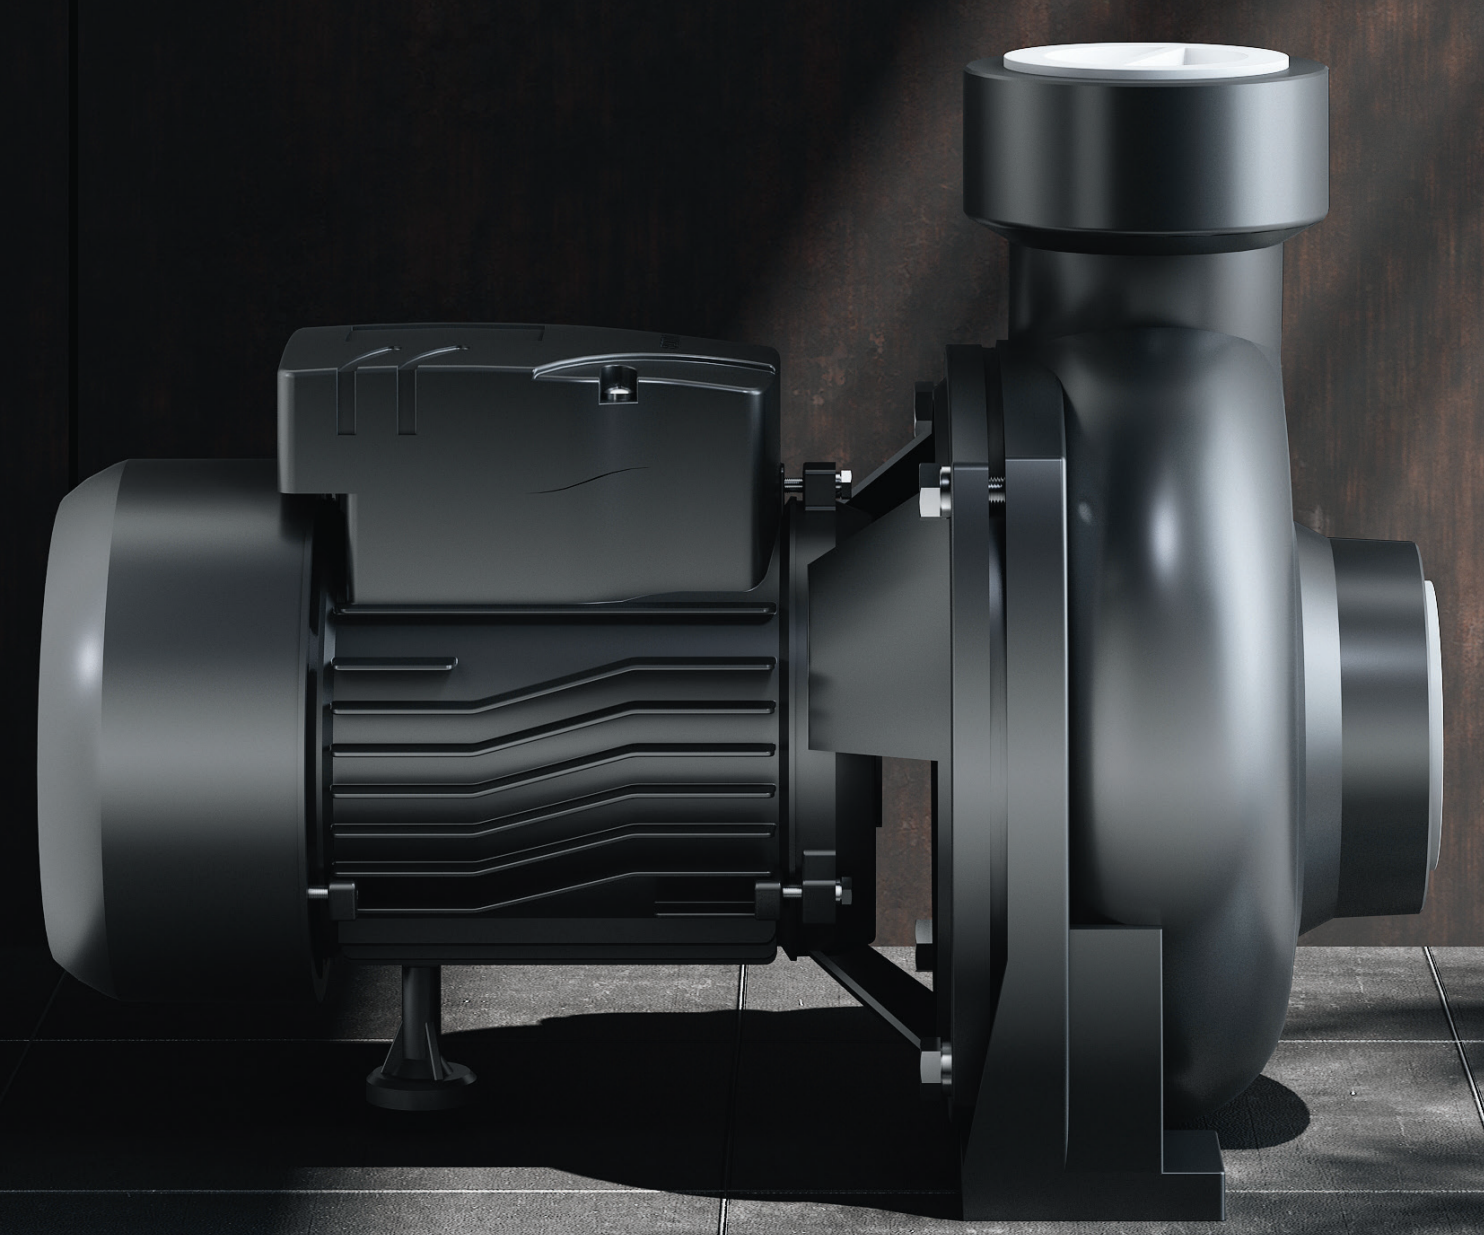

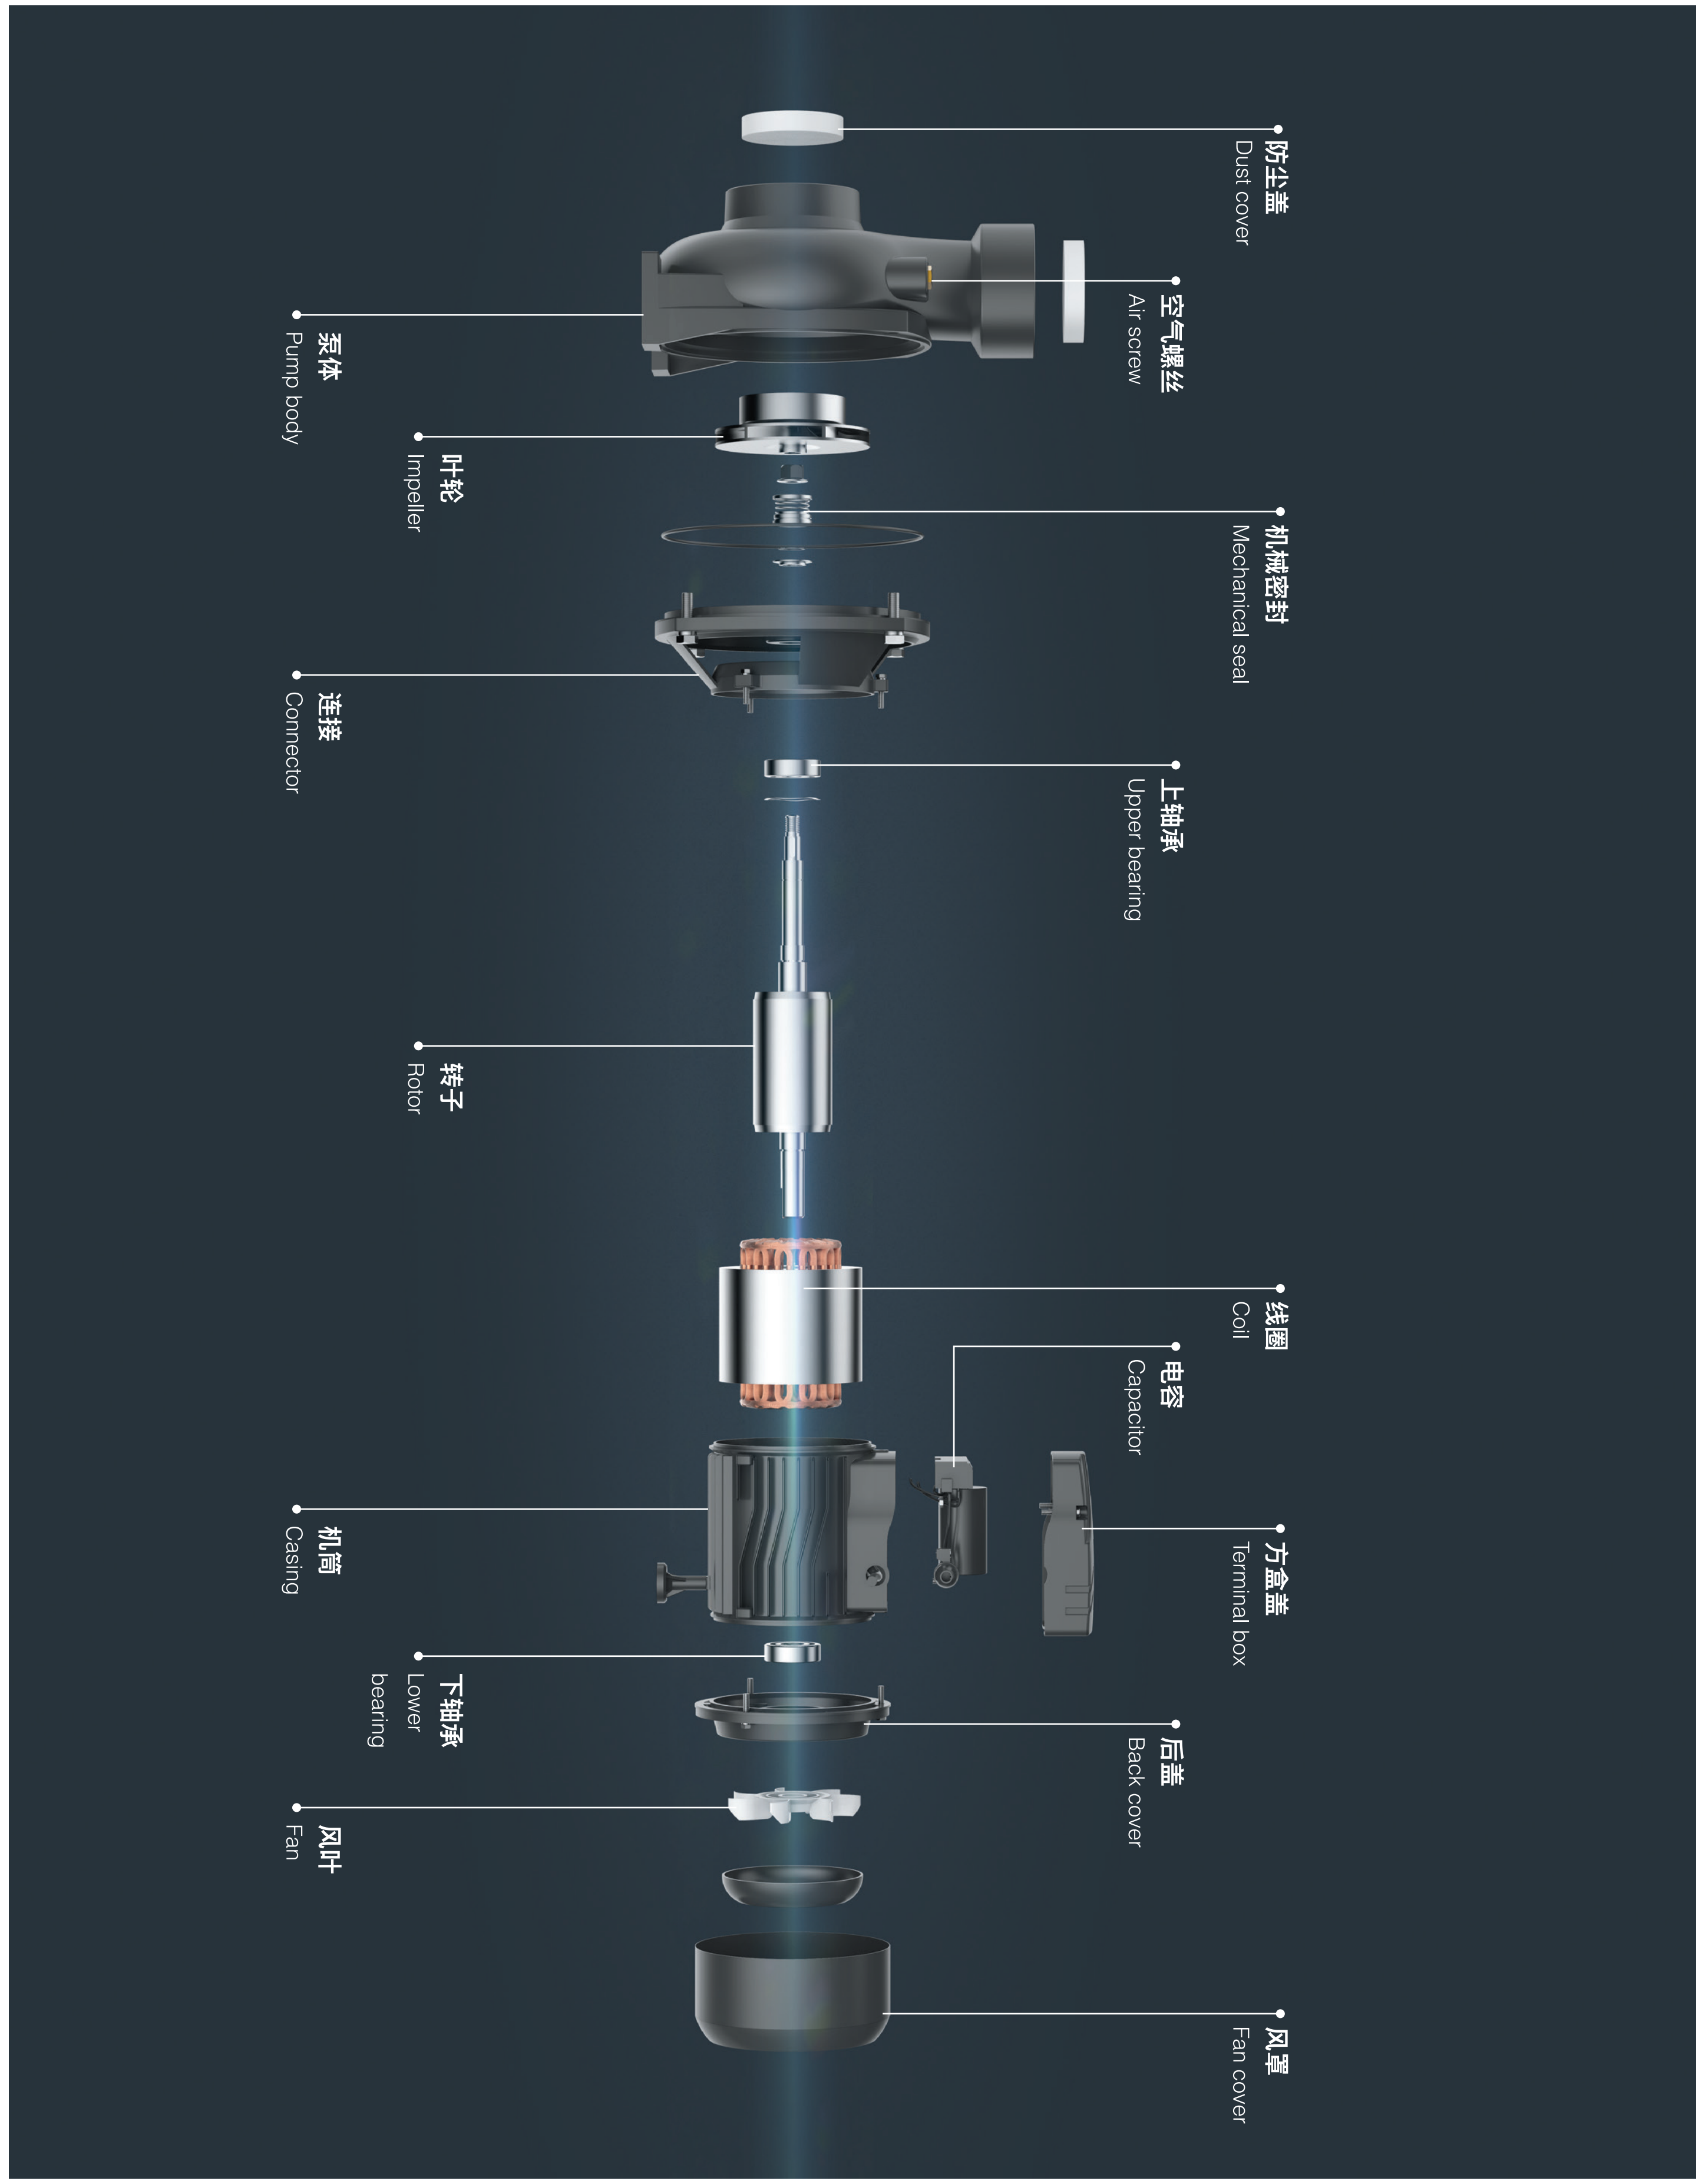

CPM 离心泵

CPM-130	功率Power: 0.37kW 扬程Max.Head: 20m 流量Max.Flow: 80L/min 频率Frequency: 50Hz/60Hz		
CPM-146	功率Power: 0.55kW 扬程Max.Head: 25m 流量Max.Flow: 95L/min 频率Frequency: 50Hz/60Hz		
CPM-158	功率Power: 0.75kW 扬程Max.Head: 30m 流量Max.Flow: 120L/min 频率Frequency: 50Hz/60Hz		
CPM-180	功率Power: 1.1kW 扬程Max.Head: 35m 流量Max.Flow: 130L/min 频率Frequency: 50Hz/60Hz		
CPM-200	功率Power: 1.5kW 扬程Max.Head: 40m 流量Max.Flow: 140L/min 频率Frequency: 50Hz/60Hz		

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

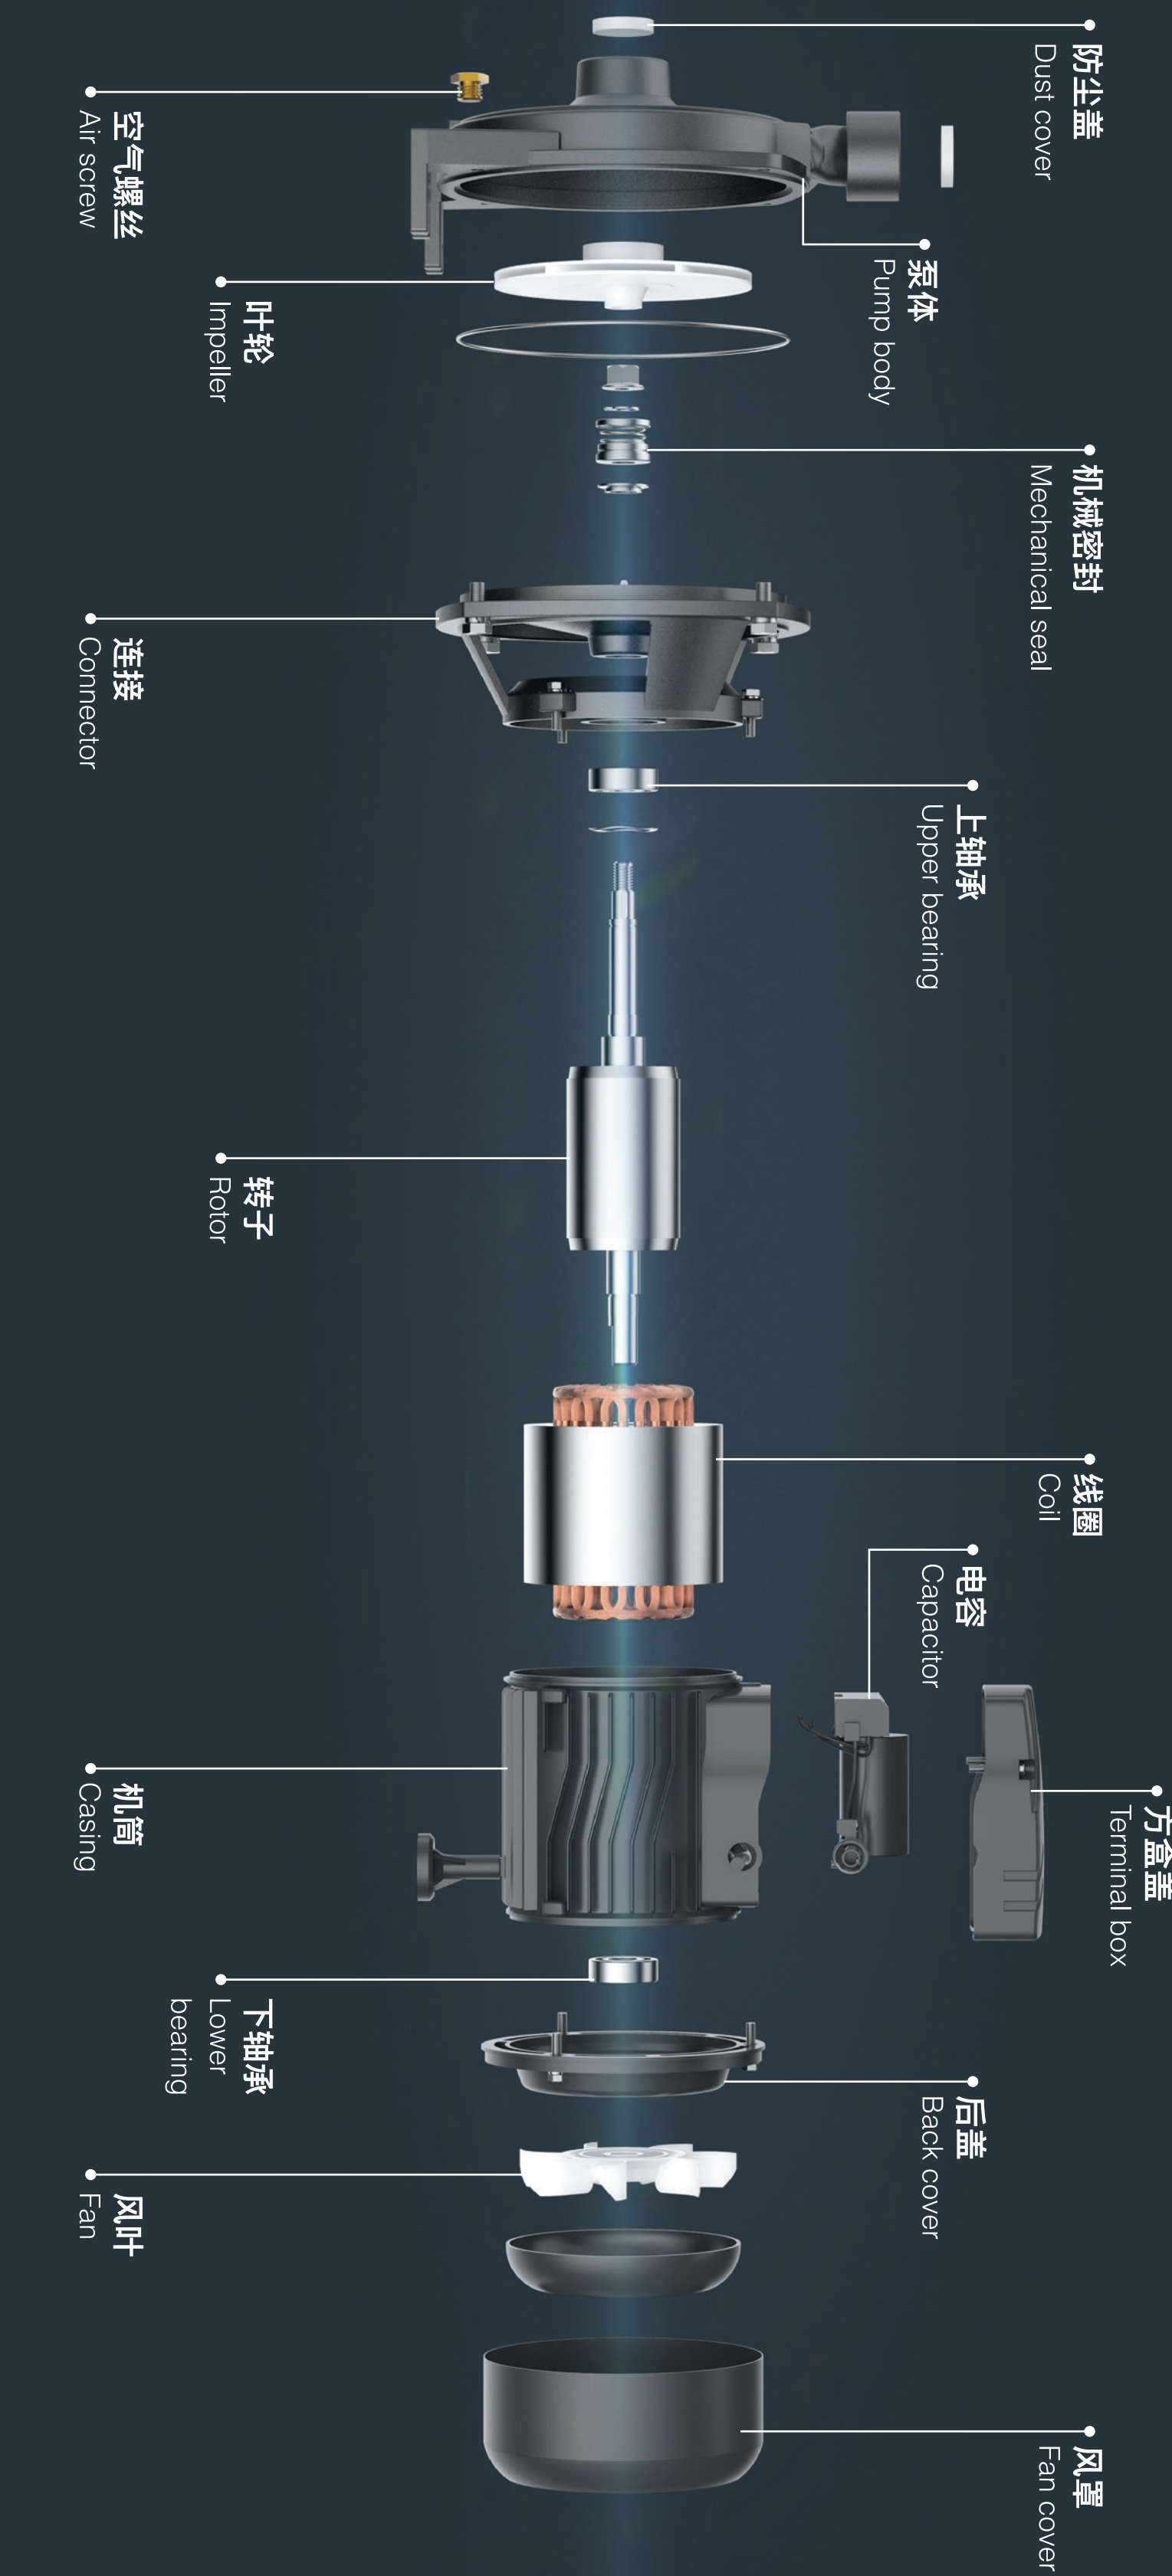

WQK
SEWAGE PUMP SERIES
排污泵系列

主要用途

铬合金叶轮的设计，具有切割功能。 该系列泵具有结构紧凑，移动方便，安装简便，抗堵塞和抗踩踏性好等优点，广泛用于农业污染，农村公路建设，房屋基础设施，畜牧业污水排放和污水处理。

Application

These pumps are very special with chromium alloy impeller, which with the function of cutting. This serie of pumps has compact structure, easy to move, easy for installation, good resistance to jam and tagle-free, which is widely used in agricultural pollution, the rural road construction, houses infrastructure, animal husbandry of sewage discharge and poof of sewage discharge.

PRODUCT
TRANSPARENT DIAGRAM
产品透视图

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

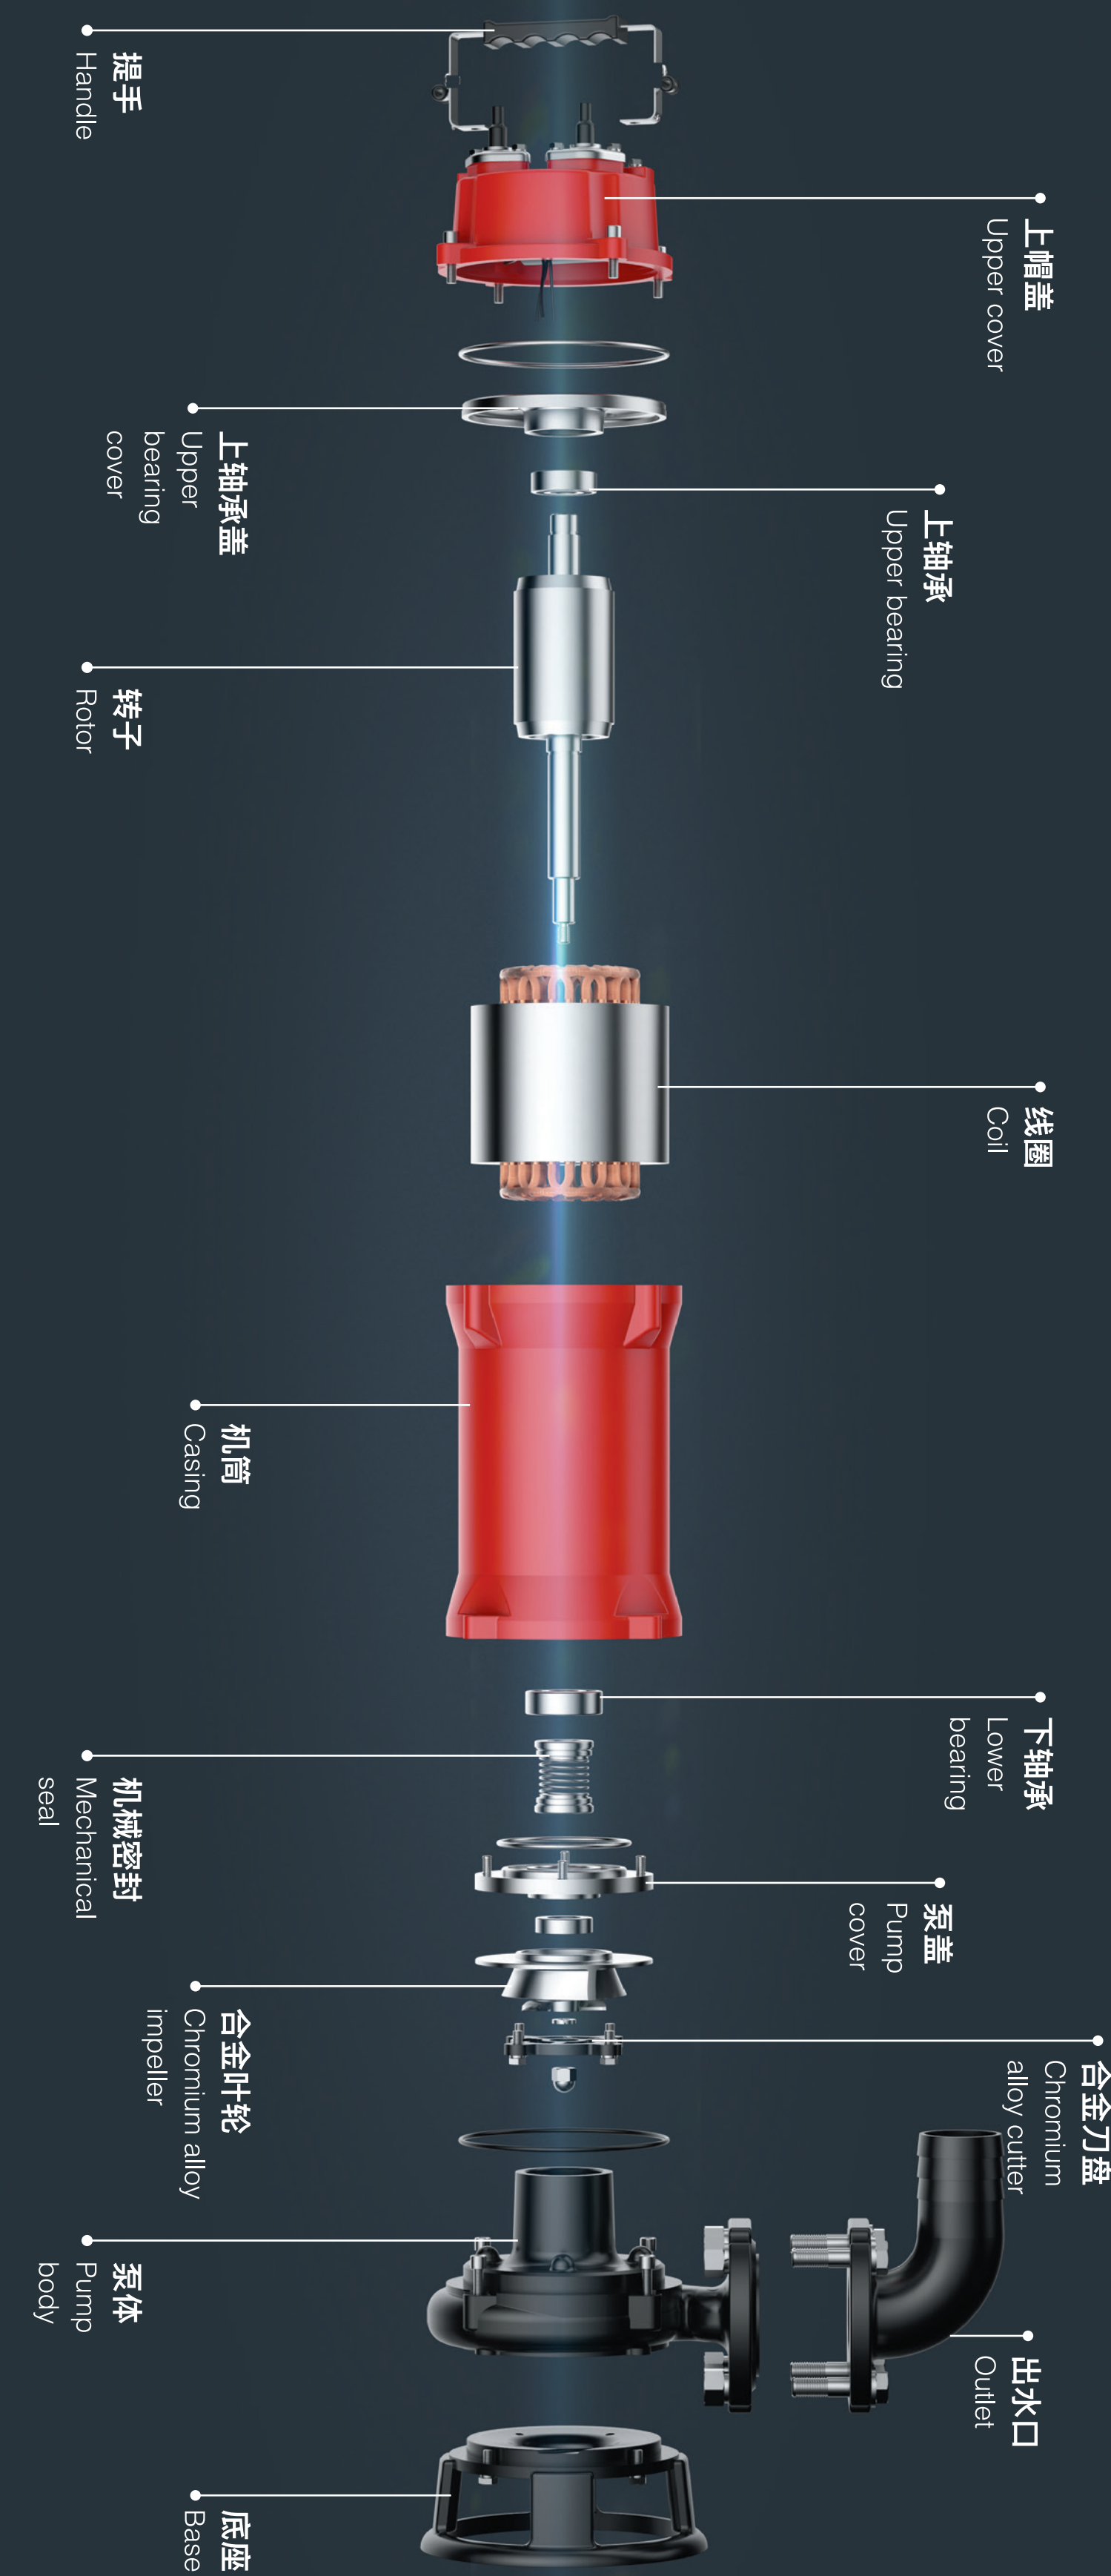

WQK SEWAGE
SUBMERSIBLE PUMP WITH CUTTING IMPELLER

铬合金铰刀式叶轮
Chromium alloy cutting impeller

WQK 铰刀式排污潜水泵系列

65WQK25-50-11
功率Power: 11kW
扬程Max.Head: 50m
流量Max.Flow: 25m³/h
口径Outlet: 65mm
频率Frequency: 50Hz/60Hz

150WQK100-50-11
功率Power: 11kW
扬程Max.Head: 50m
流量Max.Flow: 100m³/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

80WQK45-52-15
功率Power: 15kW
扬程Max.Head: 52m
流量Max.Flow: 45m³/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

200WQK220-12-15
功率Power: 15kW
扬程Max.Head: 12m
流量Max.Flow: 220m³/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

80WQK40-40-11
功率Power: 11kW
扬程Max.Head: 40m
流量Max.Flow: 40m³/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

200WQK200-9-11
功率Power: 11kW
扬程Max.Head: 9m
流量Max.Flow: 200m³/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

100WQK60-40-15
功率Power: 15kW
扬程Max.Head: 40m
流量Max.Flow: 60m³/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

100WQK60-30-11
功率Power: 11kW
扬程Max.Head: 30m
流量Max.Flow: 60m³/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

65WQK30-55-15
功率Power: 15kW
扬程Max.Head: 55m
流量Max.Flow: 30m³/h
口径Outlet: 65mm
频率Frequency: 50Hz/60Hz

150WQK100-30-15
功率Power:15kW
扬程Max.Head: 30m
流量Max.Flow: 100m³/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

WQK 铰刀式排污潜水泵系列

WQK sewage submersible pump with cutting impeller

50WQDK10-15-1.1
功率Power: 1.1kW
扬程Max.Head: 15m
流量Max.Flow: 10m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQK10-15-1.1
功率Power: 1.1kW
扬程Max.Head: 15m
流量Max.Flow: 10m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQDK15-15-1.5
功率Power: 1.5kW
扬程Max.Head: 15m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQK15-15-1.5
功率Power: 1.5kW
扬程Max.Head: 10m
流量Max.Flow: 25m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQDK25-10-1.5
功率Power: 1.5kW
扬程Max.Head:10m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

65WQK25-10-1.5
功率Power: 1.5kW
扬程Max.Head: 10m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

50WQDK15-18-1.8
功率Power: 1.8kW
扬程Max.Head: 18m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQK15-18-1.8
功率Power: 15kW
扬程Max.Head: 18m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQK15-22-2.2
功率Power: 2.2kW
扬程Max.Head: 22m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQK20-18-2.2
功率Power: 2.2kW
扬程Max.Head: 18m
流量Max.Flow: 20m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

80WQK40-18-2.2
功率Power: 2.2kW
扬程Max.Head: 18m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK50-7-2.2
功率Power: 2.2kW
扬程Max.Head: 7m
流量Max.Flow: 50m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

50WQK15-30-3
功率Power: 3kW
扬程Max.Head: 30m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQK25-23-3
功率Power: 3kW
扬程Max.Head: 23m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

80WQK43-13-3
功率Power: 3kW
扬程Max.Head: 13m
流量Max.Flow: 43m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK60-9-3
功率Power: 3kW
扬程Max.Head: 9m
流量Max.Flow: 60m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

50WQK15-35-4
功率Power: 4kW
扬程Max.Head: 35m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQK20-25-4
功率Power: 4kW
扬程Max.Head: 25m
流量Max.Flow: 20m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

80WQK30-25-4
功率Power: 4kW
扬程Max.Head: 25m
流量Max.Flow: 30m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK50-15-4
功率Power: 4kW
扬程Max.Head: 15m
流量Max.Flow: 50m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

65WQK25-35-5.5
功率Power: 5.5kW
扬程Max.Head: 35m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

80WQK30-30-5.5
功率Power: 5.5kW
扬程Max.Head: 30m
流量Max.Flow: 30m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK80-15-5.5
功率Power: 5.5kW
扬程Max.Head: 15m
流量Max.Flow: 80m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

80WQK45-22-7.5
功率Power: 7.5kW
扬程Max.Head: 22m
流量Max.Flow: 45m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK80-18-7.5
功率Power: 7.5kW
扬程Max.Head: 18m
流量Max.Flow: 80m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

刀片叶轮
Cutting impeller

WQK 撕裂式切割排污泵

WQK tearing cutter sewage pump

50SLWQ15-15-1.8
功率Power: 1.8kW/380V
扬程Max.Head: 15m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50SLWQD15-15-1.8
功率Power: 1.8kW/220V
扬程Max.Head: 15m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz



叶轮
Impeller

WQK 普通款切割式排污泵

WQK sewage submersible pump with cutting impeller

50WQK10-7-0.75
功率Power: 0.75kW
扬程Max.Head: 7m
流量Max.Flow: 10m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQK15-9-1.1
功率Power: 1.1kW
扬程Max.Head: 9m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQK20-10-1.5
功率Power: 1.5kW
扬程Max.Head: 10m
流量Max.Flow: 20m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQK25-7-1.5
功率Power: 1.5kW
扬程Max.Head: 7m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

65WQK25-10-2.2
功率Power: 2.2kW
扬程Max.Head: 10m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

75WQK37-10-3
功率Power: 3kW
扬程Max.Head: 10m
流量Max.Flow: 37m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

75WQK50-16-4
功率Power: 4kW
扬程Max.Head: 16m
流量Max.Flow: 50m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

75WQK50-18-5.5
功率Power: 5.5kW
扬程Max.Head: 18m
流量Max.Flow: 50m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK80-10-5.5
功率Power: 5.5kW
扬程Max.Head: 10m
流量Max.Flow: 80m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

75WQK50-22-7.5
功率Power: 7.5kW
扬程Max.Head: 22m
流量Max.Flow: 50m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQK100-18-7.5
功率Power: 7.5kW
扬程Max.Head: 18m
流量Max.Flow: 100m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

WQD(F)

SMALL SEWAGE PUMP SERIES

小型排污泵系列

STAINLESS STEEL

CUTTING SEWAGE PUMP

不锈钢排污泵

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

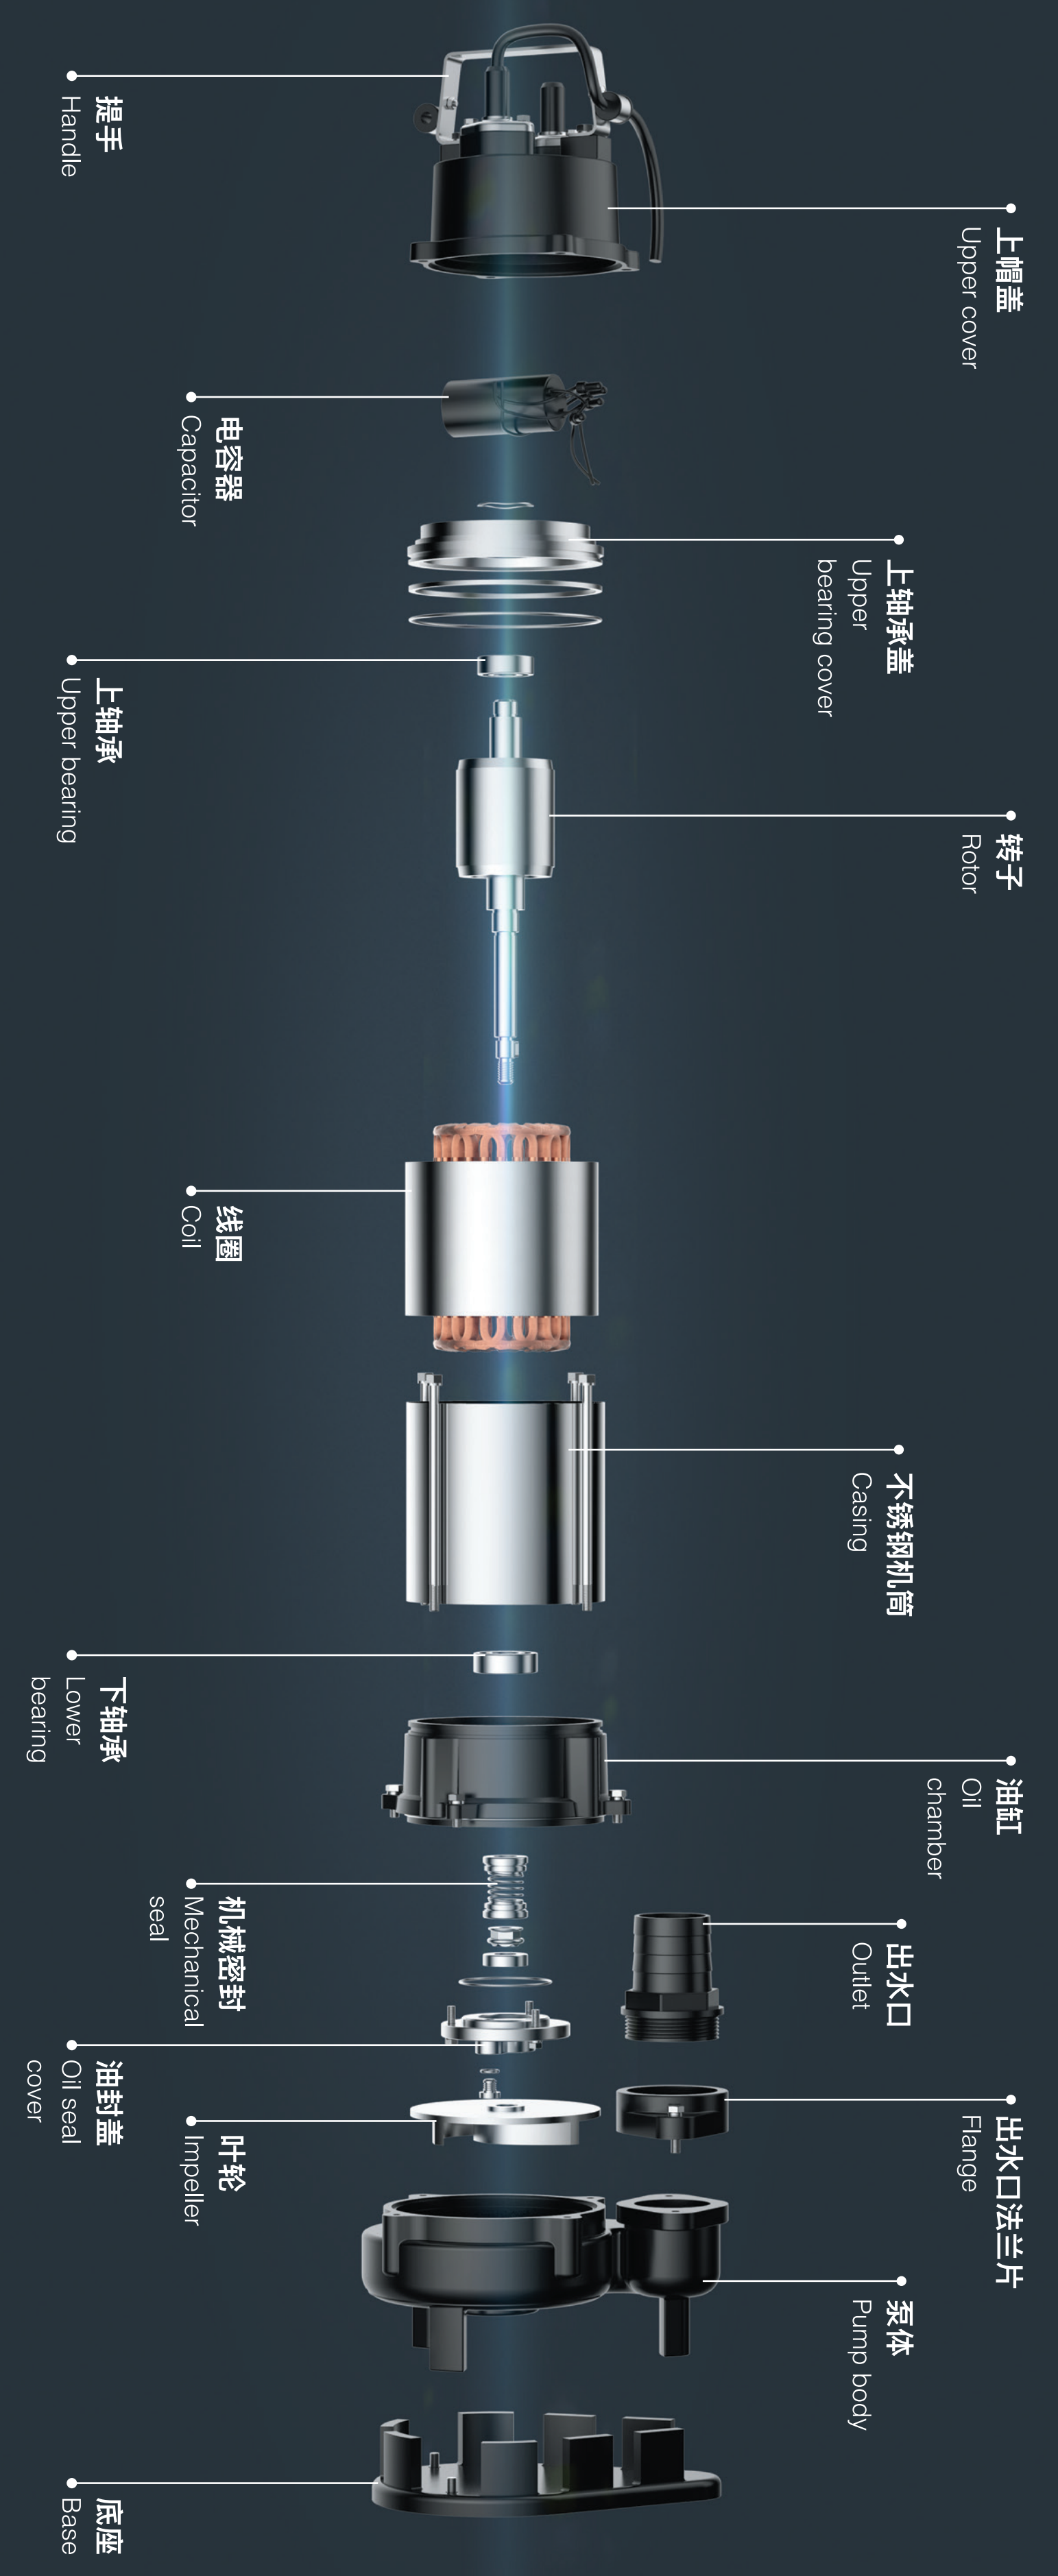

WQD(F)

STAINLESS STEEL SEWAGE SUBMERSIBLE PUMP

小型不锈钢排污泵






主要用途

适用于工厂，建筑工地和商业设施中的废水排放，市政污水处理厂中的排水系统，住宅区的排水站，市政项目：甲烷池和农村田间灌溉。

Application

Wastewater drainage in factories, construction sites and commercial facilities.
Drainage system in municipal sewage treatment factories
Drainage station in residential areas.
Municipal projects
Methane pools and field irrigation in countryside.

WQD(F)

STAINLESS STEEL SEWAGE SUBMERSIBLE PUMP

WQD(F) 小型不锈钢排污泵

型号	功率Power	扬程Max.Head	流量Max.Flow	口径Outlet	频率Frequency
V180(F)	0.18kW	8m	5m^3/h	25mm	50Hz/60Hz
V450(F)	0.45kW	13m	10m^3/h	50mm	50Hz/60Hz
V750(F)	0.75kW	16m	10m^3/h	50mm	50Hz/60Hz
V1100(F)	1.1kW	22m	10m^3/h	50mm	50Hz/60Hz
V1500(F)	1.5kW	26m	8m^3/h	40mm	50Hz/60Hz
V1800(F)	1.8kW	15m	30m^3/h	80mm	50Hz/60Hz
V2200(F)	2.2kW	7m	42m^3/h	80mm	50Hz/60Hz
SPA6-28/2-1.1(F)	1.1kW	28m	6m^3/h	50mm	50Hz/60Hz
SPA6-39/3-1.5(F)	1.5kW	39m	6m^3/h	50mm	50Hz/60Hz
SPA6-50/4-1.8(F)	1.8kW	50m	6m^3/h	50mm	50Hz/60Hz
V1100D(F)	1.1kW	9m	20m^3/h	50mm	50Hz/60Hz
V1300D(F)	1.3kW	9m	20m^3/h	50mm	50Hz/60Hz

WQK(F)

STAINLESS STEEL SEWAGE PUMP WITH CUTTING IMPELLER

叶轮
Impeller

铬合金铰刀式叶轮
Chromium alloy cutting impeller

WQK(F) 不锈钢切割式排污泵

型号	功率Power	扬程Max.Head	流量Max.Flow	频率Frequency
WQ/WQD(F)6-7-0.37S	0.37kW	7m	6m^3/h	50Hz/60Hz
WQ/WQD(F)10-10-0.55S	0.55kW	10m	10m^3/h	50Hz/60Hz
WQ/WQD(F)10-15-0.75S	0.75kW	15m	10m^3/h	50Hz/60Hz
V1100D(F)	0.75kW	10m	15m^3/h	50Hz/60Hz
V1300D(F)	1.1kW	11m	18m^3/h	50Hz/60Hz
WQKS(F)10-10-0.75	0.75kW	10m	10m^3/h	50Hz/60Hz
WQKS(F)10-15-1.1	1.1kW	15m	10m^3/h	50Hz/60Hz
WQKS(F)15-15-1.5	1.5kW	15m	15m^3/h	50Hz/60Hz
WQKS(F)35-9-2.2	2.2kW	9m	35m^3/h	50Hz/60Hz

WQ/WQD

CAST IRON SMALL SEWAGE PUMP

铸铁小型排污泵

WQ/WQD6-10-0.75

功率Power: 0.75kW
扬程Max.Head: 10m
流量Max.Flow: 6m³/h
频率Frequency: 50/60Hz

WQ/WQD7-12-1.1

功率Power: 1.1kW
扬程Max.Head: 32m
流量Max.Flow: 12m³/h
频率Frequency: 50/60Hz

WQ/WQD10-10-0.55

功率Power: 0.55kW
扬程Max.Head: 10m
流量Max.Flow: 10m³/h
频率Frequency: 50/60Hz

WQ/WQD10-15-0.75

功率Power: 0.75kW
扬程Max.Head: 15m
流量Max.Flow: 10m³/h
频率Frequency: 50/60Hz

WQ/WQD10-10-0.55

功率Power: 0.55kW
扬程Max.Head: 10m
流量Max.Flow: 10m³/h
频率Frequency: 50/60Hz

WQ/WQD15-15-0.75

功率Power: 0.75kW
扬程Max.Head: 15m
流量Max.Flow: 15m³/h
频率Frequency: 50/60Hz

WQ/WQD8-12-1.5

功率Power: 1.5kW
扬程Max.Head: 12m
流量Max.Flow: 8m³/h
频率Frequency: 50/60Hz

WQ/WQD15-15-1.5

功率Power: 1.5kW
扬程Max.Head: 15m
流量Max.Flow: 15m³/h
频率Frequency: 50/60Hz

PRODUCT

BREAKDOWN DIAGRAM
产品分解图

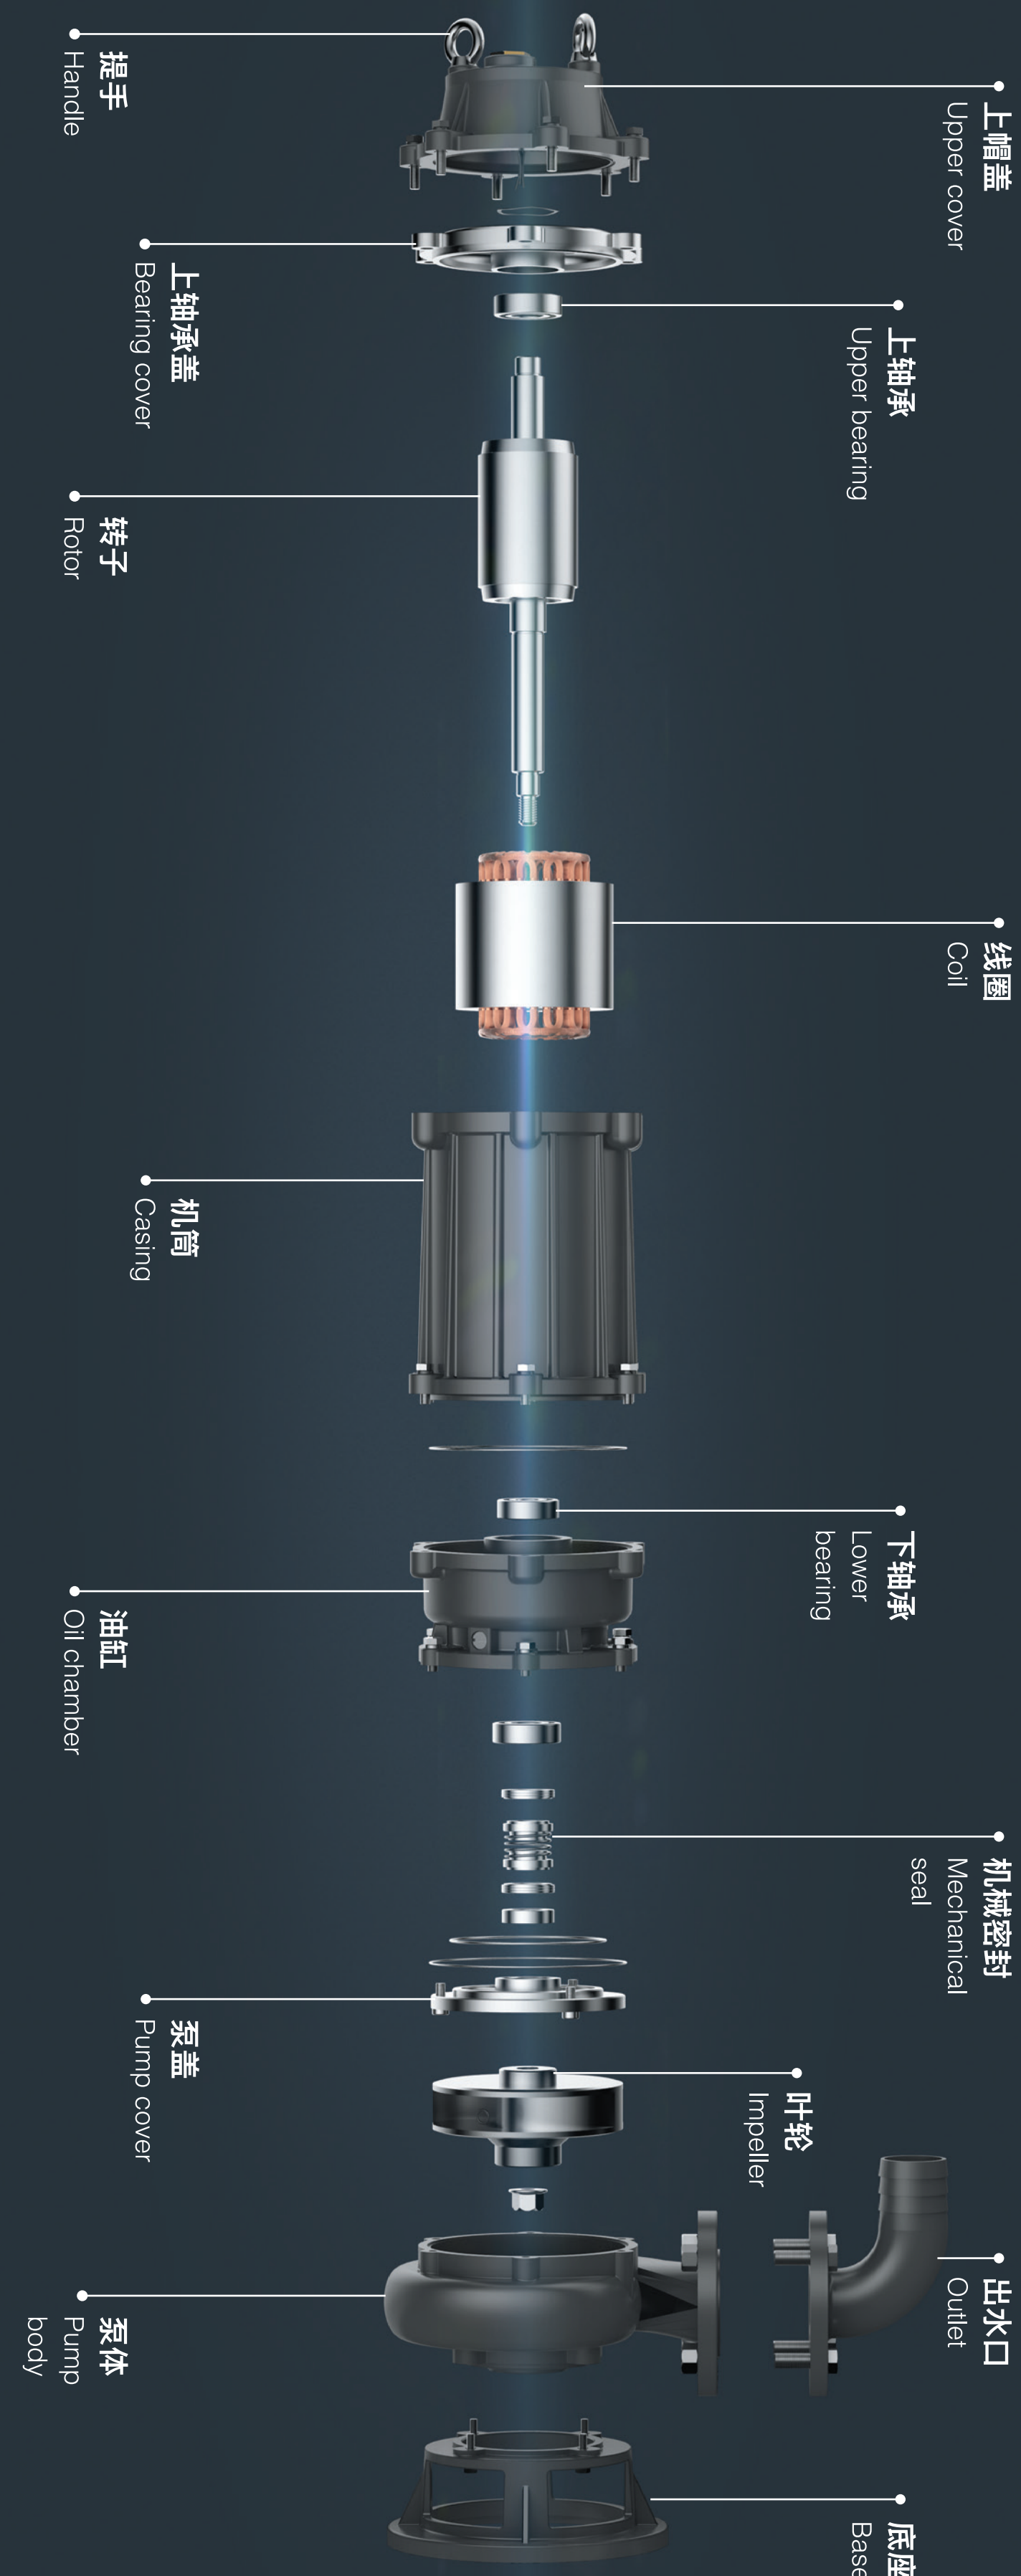

WQ

NEW-TYPE SEWAGE PUMP

WQ 新款排污潜水泵

50WQ10-15-1.1
功率Power: 1.1kW
扬程Max.Head: 15m
流量Max.Flow: 10m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ15-15-1.5
功率Power: 1.5kW
扬程Max.Head: 15m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ9-22-2.2
功率Power: 2.2kW
扬程Max.Head: 22m
流量Max.Flow: 9m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQ25-15-2.2
功率Power: 2.2kW
扬程Max.Head: 15m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

75WQ40-10-2.2
功率Power: 2.2kW
扬程Max.Head: 10m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

50WQ15-30-3
功率Power: 3kW
扬程Max.Head: 30m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQ25-22-3
功率Power: 3kW
扬程Max.Head: 22m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

75WQ40-14-3
功率Power: 3kW
扬程Max.Head: 14m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

50WQ12-50-4
功率Power: 4kW
扬程Max.Head: 50m
流量Max.Flow: 12m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ15-35-4
功率Power: 4kW
扬程Max.Head: 35m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

65WQ25-28-4
功率Power: 4kW
扬程Max.Head: 28m
流量Max.Flow: 25m^3/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

75WQ40-18-4
功率Power: 4kW
扬程Max.Head: 18m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQ60-14-4
功率Power: 4kW
扬程Max.Head: 14m
流量Max.Flow: 60m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

50WQ12-60-5.5
功率Power: 5.5kW
扬程Max.Head: 60m
流量Max.Flow: 12m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ15-45-5.5
功率Power: 5.5kW
扬程Max.Head: 45m
流量Max.Flow: 15m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

75WQ40-24-5.5
功率Power: 5.5kW
扬程Max.Head: 24m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQ60-18-5.5
功率Power: 5.5kW
扬程Max.Head: 18m
流量Max.Flow: 60m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

50WQ12-72-7.5
功率Power: 7.5kW
扬程Max.Head: 72m
流量Max.Flow: 12m^3/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

75WQ40-30-7.5
功率Power: 7.5kW
扬程Max.Head: 30m
流量Max.Flow: 40m^3/h
口径Outlet: 80mm
频率Frequency: 50Hz/60Hz

100WQ65-22-7.5
功率Power: 7.5kW
扬程Max.Head: 22m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

150WQ100-12-7.5
功率Power: 7.5kW
扬程Max.Head: 12m
流量Max.Flow: 100m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

100WQ65-30-11
功率Power: 11kW
扬程Max.Head: 30m
流量Max.Flow: 65m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

150WQ100-22-11
功率Power: 11kW
扬程Max.Head: 22m
流量Max.Flow: 100m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

175WQ150-12-11
功率Power: 11kW
扬程Max.Head: 12m
流量Max.Flow: 150m^3/h
口径Outlet: 175mm
频率Frequency: 50Hz/60Hz

200WQ200-5-11
功率Power: 11kW
扬程Max.Head: 5m
流量Max.Flow: 200m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

100WQ100-30-15
功率Power: 15kW
扬程Max.Head: 30m
流量Max.Flow: 100m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

150WQ180-15-15
功率Power: 15kW
扬程Max.Head: 15m
流量Max.Flow: 180m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

200WQ250-12-15
功率Power: 15kW
扬程Max.Head: 12m
流量Max.Flow: 250m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

100WQ100-35-18.5
功率Power: 8.5kW
扬程Max.Head: 35m
流量Max.Flow: 100m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

150WQ180-20-18.5
功率Power: 18.5kW
扬程Max.Head: 20m
流量Max.Flow: 180m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

100WQ100-40-22
功率Power: 22kW
扬程Max.Head: 40m
流量Max.Flow: 100m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

150WQ150-30-22
功率Power: 22kW
扬程Max.Head: 30m
流量Max.Flow: 150m^3/h
口径Outlet: 100mm
频率Frequency: 50Hz/60Hz

200WQ300-18-22
功率Power: 22kW
扬程Max.Head: 18m
流量Max.Flow: 300m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

150WQ180-30-30
功率Power: 30kW
扬程Max.Head: 30m
流量Max.Flow: 180m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

200WQ400-13-30
功率Power: 30kW
扬程Max.Head: 13m
流量Max.Flow: 400m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

250WQ600-9-30
功率Power: 30kW
扬程Max.Head: 9m
流量Max.Flow: 600m^3/h
口径Outlet: 250mm
频率Frequency: 50Hz/60Hz

150WQ200-30-37
功率Power: 37kW
扬程Max.Head: 30m
流量Max.Flow: 200m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

200WQ350-25-37
功率Power: 37kW
扬程Max.Head: 25m
流量Max.Flow: 350m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

250WQ600-12-37
功率Power: 37kW
扬程Max.Head: 12m
流量Max.Flow: 600m^3/h
口径Outlet: 250mm
频率Frequency: 50Hz/60Hz

150WQ180-45-45
功率Power: 45kW
扬程Max.Head: 45m
流量Max.Flow: 180m^3/h
口径Outlet: 150mm
频率Frequency: 50Hz/60Hz

200WQ400-25-45
功率Power: 45kW
扬程Max.Head: 25m
流量Max.Flow: 400m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

250WQ600-15-45
功率Power: 45kW
扬程Max.Head: 15m
流量Max.Flow: 600m^3/h
口径Outlet: 250mm
频率Frequency: 50Hz/60Hz

300WQ800-12-45
功率Power: 45kW
扬程Max.Head: 12m
流量Max.Flow: 800m^3/h
口径Outlet: 300mm
频率Frequency: 50Hz/60Hz

200WQ400-30-55
功率Power: 55kW
扬程Max.Head: 30m
流量Max.Flow: 400m^3/h
口径Outlet: 200mm
频率Frequency: 50Hz/60Hz

250WQ600-20-55
功率Power: 55kW
扬程Max.Head: 20m
流量Max.Flow: 600m^3/h
口径Outlet: 250mm
频率Frequency: 50Hz/60Hz

PRODUCT
BREAKDOWN DIAGRAM
产品分解图

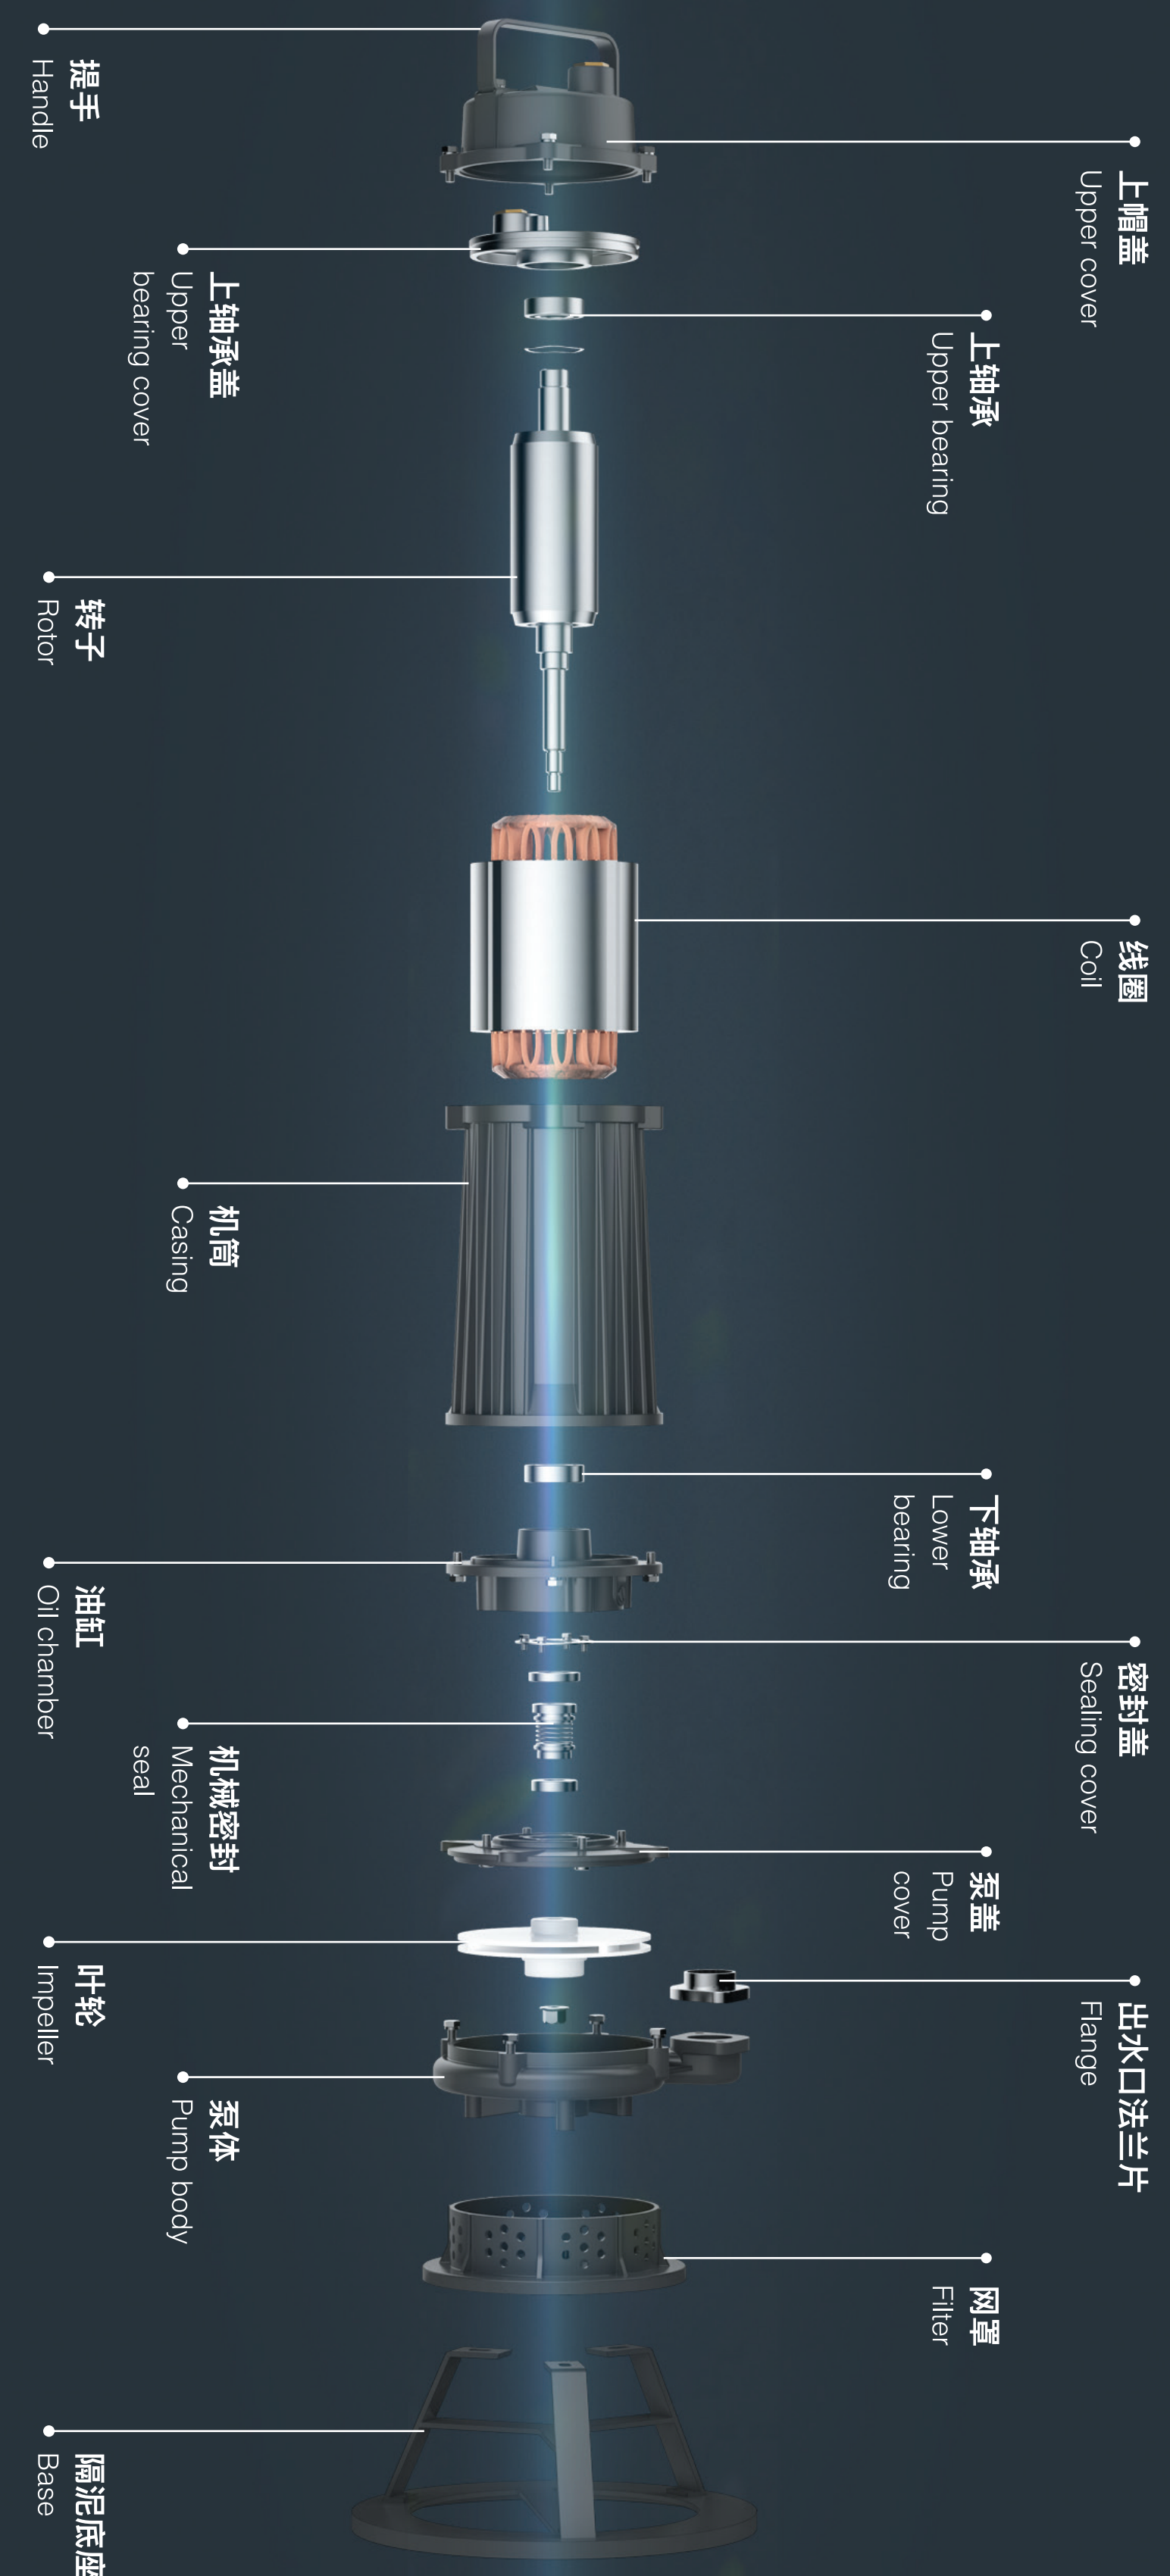

WQ/WQD
HIGH-LIFTING SEWAGE PUMP

WQ/WQD 高扬程排污泵

50WQD12-22-1.5
功率Power: 1.5kW
扬程Max.Head: 22m
流量Max.Flow: 12m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ12-34-2.2
功率Power: 2.2kW
扬程Max.Head: 34m
流量Max.Flow: 12m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ12-44-3
功率Power: 3kW
扬程Max.Head: 44m
流量Max.Flow: 12m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ12-50-4
功率Power: 4kW
扬程Max.Head: 50m
流量Max.Flow: 12m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ12-60-5.5
功率Power: 5.5kW
扬程Max.Head: 60m
流量Max.Flow: 12m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

50WQ12-70-7.5
功率Power: 7.5kW
扬程Max.Head: 70m
流量Max.Flow: 12m³/h
口径Outlet: 50mm
频率Frequency: 50Hz/60Hz

63WQ20-55-11
功率Power: 11kW
扬程Max.Head: 55m
流量Max.Flow: 20m³/h
口径Outlet: 63mm
频率Frequency: 50Hz/60Hz

63WQ25-65-15
功率Power: 15kW
扬程Max.Head: 65m
流量Max.Flow: 25m³/h
口径: 63mm
频率Frequency: 50Hz/60Hz

JYWQ SERIES

AUTOMATIC MIXING SEWAGE PUMP

主要用途

JYWQ型系列自动搅匀排污泵是在普通排污泵的基础上安装自动搅拌装置，电泵运行时产生极强的搅拦力，将污水池内的沉积物搅拌成悬浮物，吸入泵内排出，提高了排污能力，是理想的清淤排污设备

Application

JYWQ series automatic mixing sewage pump is installed on the basis of ordinary sewage pump with automatic stirring device. When the electric pump is running, it produces extremely strong stirring force, which stirs the sediment in the sewage tank into suspended matter, and sucks it into the pump and discharges it. It is an ideal silt removal equipment

JYWQ 搅匀式排污泵

JYWQ10-15-1.1	功率Power: 1.1kW 搅匀范围: 800 扬程Max.Head: 15m 流量Max.Flow: 10m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**JYWQ15-15-1.5**	功率Power: 1.5kW 搅匀范围: 800 扬程Max.Head: 15m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**JYWQ15-20-2.2**	功率Power: 2.2kW 搅匀范围: 1000 扬程Max.Head: 20m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz
JYWQ20-18-2.2	功率Power: 2.2kW 搅匀范围: 1000 扬程Max.Head: 18m 流量Max.Flow: 20m³/h 口径Outlet: 63mm 频率Frequency: 50Hz/60Hz	**JYWQ15-30-3**	功率Power: 3kW 搅匀范围: 1000 扬程Max.Head: 30m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**JYWQ25-24-3**	功率Power: 3kW 搅匀范围: 1000 扬程Max.Head: 24m 流量Max.Flow: 25m³/h 口径Outlet: 63mm 频率Frequency: 50Hz/60Hz
JYWQ50-10-3	功率Power: 3kW 搅匀范围: 1000 扬程Max.Head: 10m 流量Max.Flow: 50m³/h 口径Outlet: 80mm 频率Frequency: 50Hz/60Hz	**JYWQ15-35-4**	功率Power: 4kW 搅匀范围: 1500 扬程Max.Head: 35m 流量Max.Flow: 15m³/h 口径Outlet: 50mm 频率Frequency: 50Hz/60Hz	**JYWQ25-30-4**	功率Power: 4kW 搅匀范围: 1500 扬程Max.Head: 30m 流量Max.Flow: 25m³/h 口径Outlet: 66mm 频率Frequency: 50Hz/60Hz
JYWQ30-26-4	功率Power: 4kW 搅匀范围: 1500 扬程Max.Head: 26m 流量Max.Flow: 30m³/h 口径Outlet: 80mm 频率Frequency: 50Hz/60Hz	**JYWQ25-35-5.5**	功率Power: 5.5kW 搅匀范围: 1500 扬程Max.Head: 35m 流量Max.Flow: 25m³/h 口径Outlet: 63mm 频率Frequency: 50Hz/60Hz	**JYWQ50-20-5.5**	功率Power: 5.5kW 搅匀范围: 1500 扬程Max.Head: 20m 流量Max.Flow: 50m³/h 口径Outlet: 80mm 频率Frequency: 50Hz/60Hz
JYWQ65-18-5.5	功率Power: 5.5kW 搅匀范围: 1500 扬程Max.Head: 18m 流量Max.Flow: 65m³/h 口径Outlet: 100mm 频率Frequency: 50Hz/60Hz	**JYWQ45-22-7.5**	功率Power: 7.5kW 搅匀范围: 1800 扬程Max.Head: 22m 流量Max.Flow: 45m³/h 口径Outlet: 80mm 频率Frequency: 50Hz/60Hz	**JYWQ80-15-7.5**	功率Power: 7.5kW 搅匀范围: 1800 扬程Max.Head: 15m 流量Max.Flow: 80m³/h 口径Outlet: 100mm 频率Frequency: 50Hz/60Hz

MULTI PURPOSE

SELF PRIMING PUMP SERIES

多用途自吸式泵

主要用途

三款自吸泵都采用铸铁开放式叶轮，具有良好的自吸能力和水的通过性。可用于河水、井水，略带杂质和浓度的水体。运用广泛，使用简便。

Application

The three self-priming pumps all use cast iron open impellers, which have good self-priming capacity and water passage. It can be used in river water, well water, Slightly impurity water. It is widely used and easy to use.

SELF PRIMING

PUMP SERIES

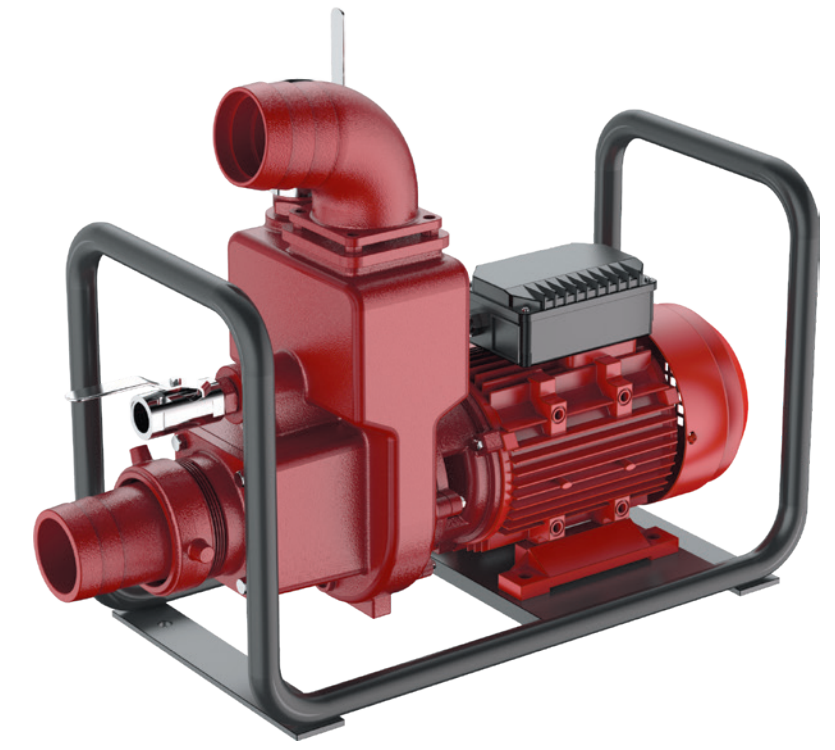

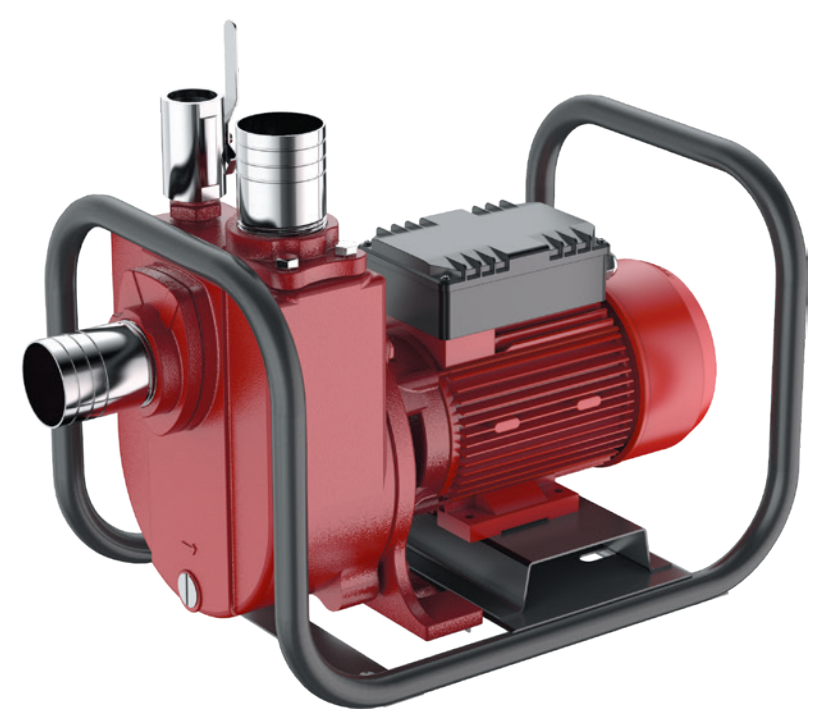

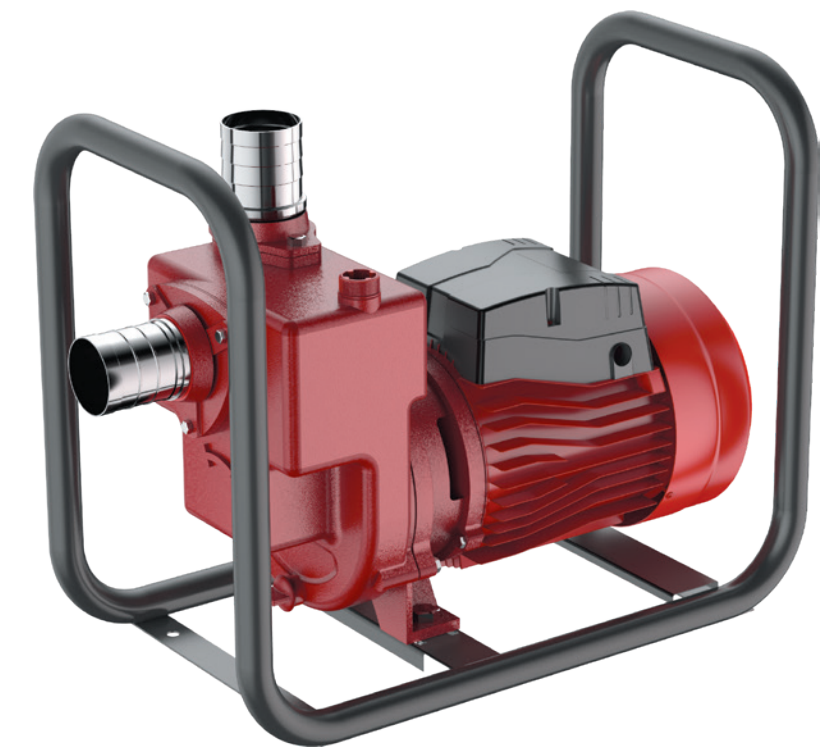

多用途自吸式泵

HXsm-2200	功率Power: 2.2kW/ 扬程Max.Head: 24m 流量Max.Flow: 10m³/h 口径Outlet: 50mm 电压Voltage: 220V/380V	**WBZ35-10-2.2**	功率Power: 双吸入口/2.2kW 扬程Max.Head: 10m 流量Max.Flow: 35m³/h 口径Outlet: 80–20mm 电压Voltage: 380V/220V	**WBZ10-15-1.5**	功率Power: 1.5kW 扬程Max.Head: 15m 流量Max.Flow: 10m³/h 口径Outlet: 40mm 电压Voltage: 220V/380V

OIL PUMP
FOR MACHINE TOOLS

机床油泵

DB-6	功率Power/频率Frequency: 40W/50Hz	扬程Max.Head: 3.3m	流量Max.Flow: $6m^3/h$	口径Outlet: 25mm
DB-12	功率Power/频率Frequency: 40W/50Hz	扬程Max.Head: 3m	流量Max.Flow: $12m^3/h$	口径Outlet: 25mm
DB-25A	功率Power/频率Frequency: 120W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $25m^3/h$	口径Outlet: 25mm
DB-50	功率Power/频率Frequency: 120W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $50m^3/h$	口径Outlet: 25mm
DB-100	功率Power/频率Frequency: 250W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $100m^3/h$	口径Outlet: 32mm
AB-12	功率Power/频率Frequency: 40W/50Hz	扬程Max.Head: 3m	流量Max.Flow: $12m^3/h$	口径Outlet: 25mm
AB-25	功率Power/频率Frequency: 90W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $25m^3/h$	口径Outlet: 25mm
AB-50	功率Power/频率Frequency: 120W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $50m^3/h$	口径Outlet: 25mm
AB-100	功率Power/频率Frequency: 250W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $100m^3/h$	口径Outlet: 32mm
AB-120	功率Power/频率Frequency: 450W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $200m^3/h$	口径Outlet: 40mm
AOB-12	功率Power/频率Frequency: 40W/50Hz	扬程Max.Head: 3m	流量Max.Flow: $12m^3/h$	口径Outlet: 25mm
AOB-25	功率Power/频率Frequency: 90W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $25m^3/h$	口径Outlet: 25mm
AOB-50	功率Power/频率Frequency: 120W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $50m^3/h$	口径Outlet: 25mm
AOB-100	功率Power/频率Frequency: 250W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $100m^3/h$	口径Outlet: 32mm
AOB-200	功率Power/频率Frequency: 450W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $200m^3/h$	口径Outlet: 40mm
JCB-22	功率Power/频率Frequency: 125W/50Hz	扬程Max.Head: 3.3m	流量Max.Flow: $22m^3/h$	口径Outlet: 25mm
JCB-45	功率Power/频率Frequency: 150W/50Hz	扬程Max.Head: 3.3m	流量Max.Flow: $45m^3/h$	口径Outlet: 25mm
JCB-90	功率Power/频率Frequency: 500W/50Hz	扬程Max.Head: 5m	流量Max.Flow: $90m^3/h$	口径Outlet: 25mm
DOB10	功率Power/频率Frequency: 25W/50Hz	扬程Max.Head: 3m	流量Max.Flow: $10m^3/h$	口径Outlet: 25mm
DOB-12	功率Power/频率Frequency: 40W/50Hz	扬程Max.Head: 3m	流量Max.Flow: $12m^3/h$	口径Outlet: 25mm
DOB-25	功率Power/频率Frequency: 90W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $25m^3/h$	口径Outlet: 25mm
DOB-50	功率Power/频率Frequency: 120W/50Hz	扬程Max.Head: 4m	流量Max.Flow: $50m^3/h$	口径Outlet: 25mm

ZYB
SELF-PRIMING OIL PUMP SERIES

ZYB 自吸输油泵



ZYB1 12-24V	功率Power: 140W	扬程Max.Head: 20m	流量Max.Flow: 直流电50L/min	口径Outlet: 25mm
ZYB1 12-24V	功率Power: 150W	扬程Max.Head: 20m	流量Max.Flow: 直流电60L/min	口径Outlet: 25mm
ZYB1 220V	功率Power: 150W	扬程Max.Head: 20m	流量Max.Flow: 交流电60L/min	口径Outlet: 25mm

PUMP AND VIBRATOR
FOR CONCRETE MIXER

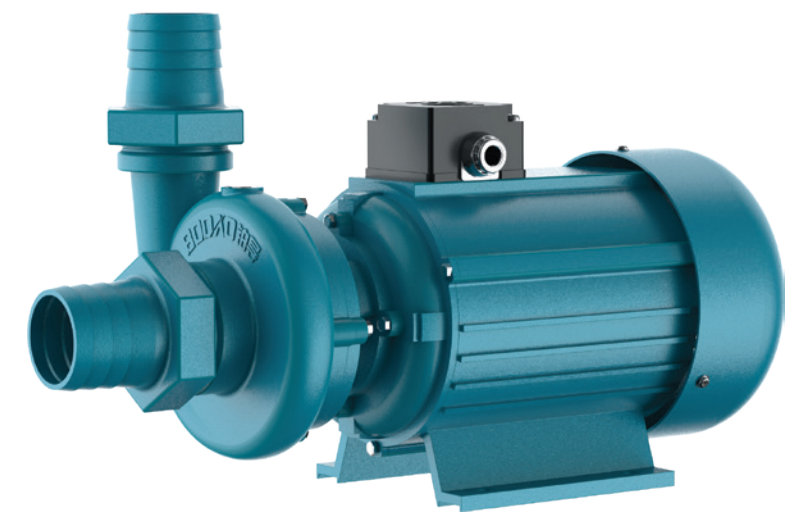

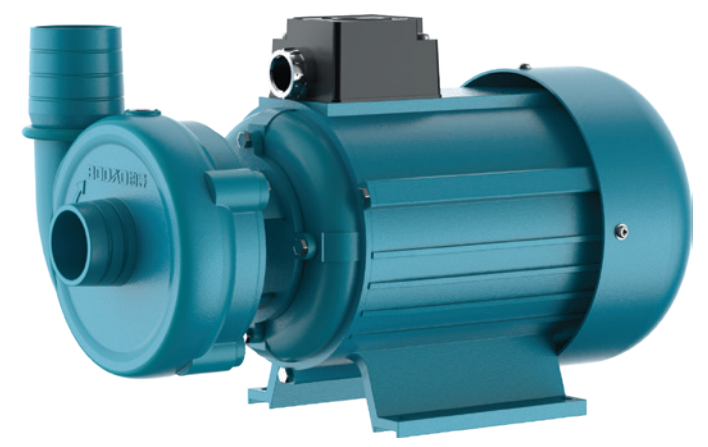



ZB37-50 400W
功率Power: 振动器400W
频率Frequency: 50Hz/60Hz

搅拌机专用泵及振动器

1.5DB15-0.55	功率Power: 固定口/0.55kW	口径Outlet: 40/32mm	频率Frequency: 50Hz/60Hz
2DB12-0.75	功率Power: 固定口/0.75kW	口径Outlet: 50/32mm	频率Frequency: 50Hz/60Hz
2.5DB10-0.75	功率Power: 外丝口/0.75kW	口径Outlet: 40mm	频率Frequency: 50Hz/60Hz
2.5DB14-1.1	功率Power: 外丝口/1.1kW	口径Outlet: 50mm	频率Frequency: 50Hz/60Hz
2.5DB16-1.5	功率Power: 外丝口/1.5kW	口径Outlet: 63mm	频率Frequency: 50Hz/60Hz
3DB20-2.2	功率Power: 法兰口/2.2kW	口径Outlet: 80mm	频率Frequency: 50Hz/60Hz
3DB25-3	功率Power: 法兰口/3kW	口径Outlet: 80mm	频率Frequency: 50Hz/60Hz

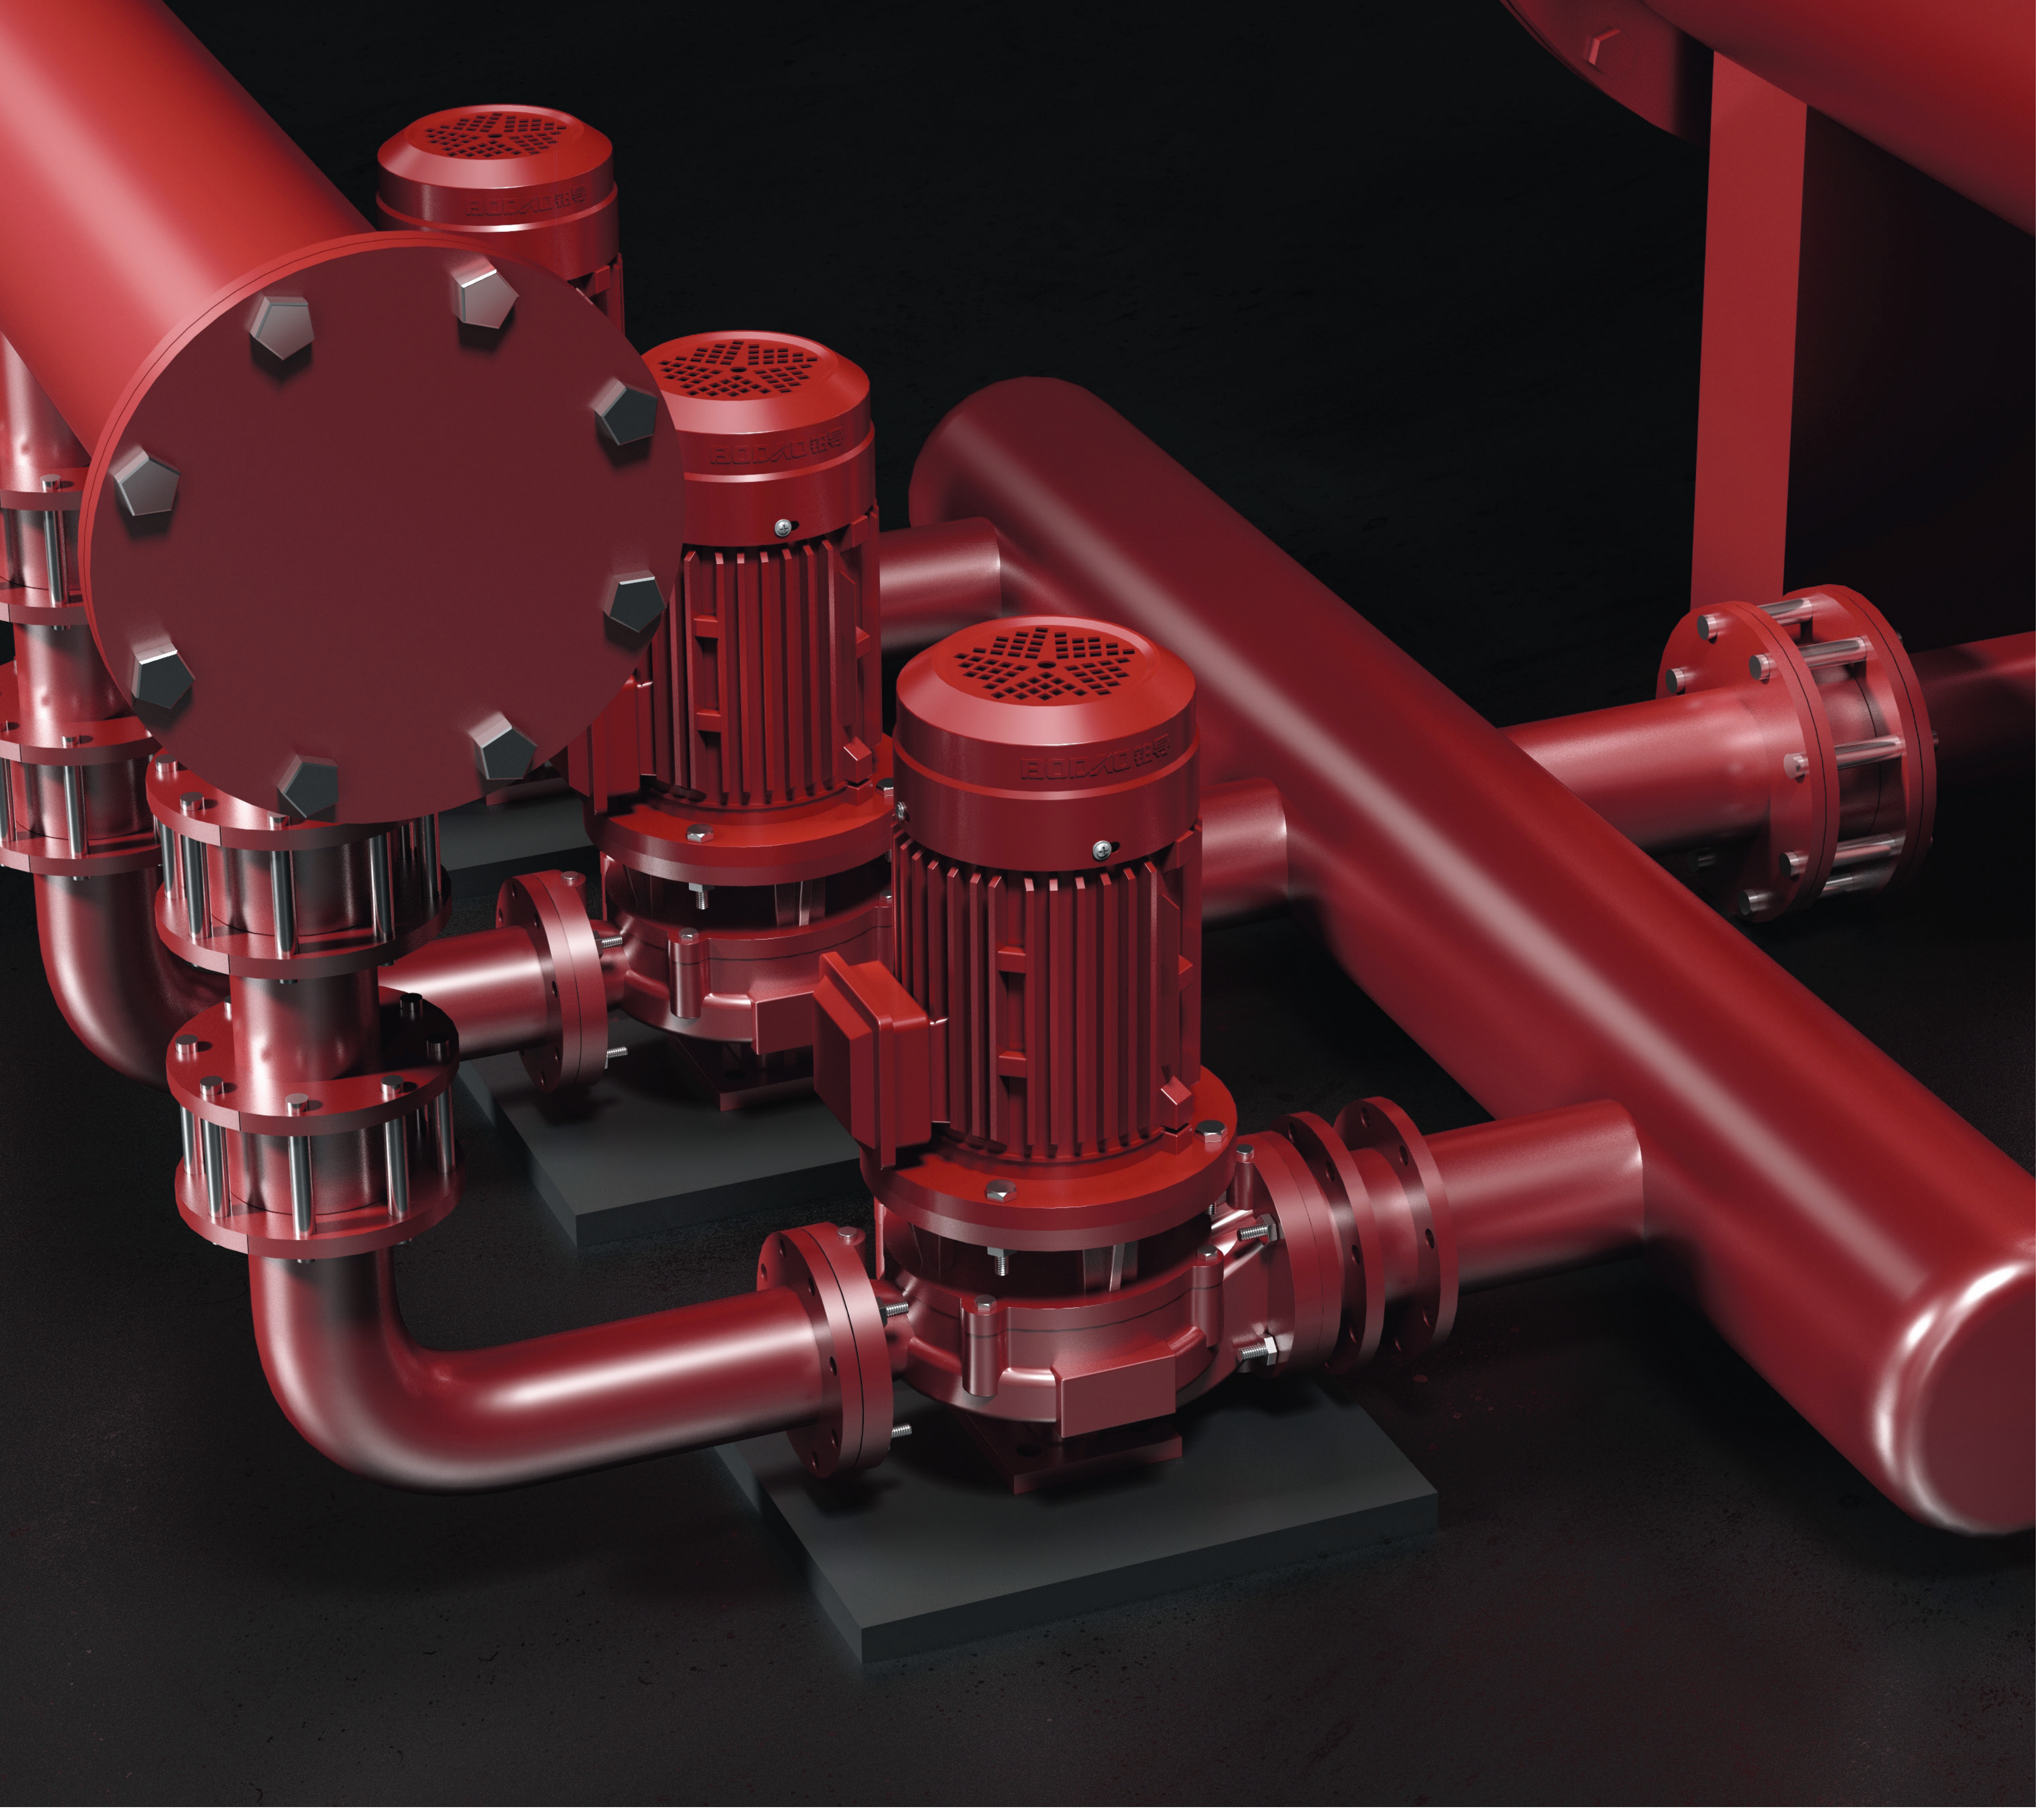

IRG / ISW

MEDIUM AND LARGE SINGLE STAGE VERTICAL
HORIZONTAL COLD AND HOT WATER PIPELINE PUMP

中大型单级立式-卧式冷热水管道泵

IRG / ISW

MEDIUM AND LARGE SINGLE STAGE VERTICAL
HORIZONTAL COLD AND HOT WATER PIPELINE PUMP





IRG/ISW 中大型单级立式-卧式冷热水管道泵

25-125-0.75	功率Power: 0.75kW/50Hz 扬程Max.Head: 25m 流量Max.Flow: 4m^3/h 口径Outlet: 25mm	**32-125-0.75**	功率Power: 0.75kW/50Hz 扬程Max.Head: 20m 流量Max.Flow: 4.5m^3/h 口径Outlet: 32mm	**40-125A-0.75**	功率Power: 0.75kW/50Hz 扬程Max.Head: 16m 流量Max.Flow: 5.6m^3/h 口径Outlet: 40mm
32-160A-1.1	功率Power: 1.1kW/50Hz 扬程Max.Head: 20m 流量Max.Flow: 4m^3/h 口径Outlet: 32mm	**40-125-1.1**	功率Power: 1.1kW/50Hz 扬程Max.Head: 20m 流量Max.Flow: 6.3m^3/h 口径Outlet: 40mm	**50-125A-1.1**	功率Power: 1.1kW/50Hz 扬程Max.Head: 17.2m 流量Max.Flow: 11.2m^3/h 口径Outlet: 50mm
40-160A-1.5	功率Power: 1.5kW/50Hz 扬程Max.Head: 28m 流量Max.Flow: 5.9m^3/h 口径Outlet: 40mm	**50-125-1.5**	功率Power: 1.5kW/50Hz 扬程Max.Head: 20m 流量Max.Flow: 12.5m^3/h 口径Outlet: 50mm	**40-160-2.2**	功率Power: 2.2kW/50Hz 扬程Max.Head: 32m 流量Max.Flow: 6.3m^3/h 口径Outlet: 40mm
50-160A-2.2	功率Power: 2.2kW/50Hz 扬程Max.Head: 28m 流量Max.Flow: 11.7m^3/h 口径Outlet: 50mm	**65-125A-2.2**	功率Power: 2.2kW/50Hz 扬程Max.Head: 16m 流量Max.Flow: 22.4m^3/h 口径Outlet: 65mm	**80-100A-2.2**	功率Power: 2.2kW/50Hz 扬程Max.Head: 16m 流量Max.Flow: 44.8m^3/h 口径Outlet: 80mm
40-200A-3	功率Power: 3kW/50Hz 扬程Max.Head: 44m 流量Max.Flow: 5.9m^3/h 口径Outlet: 40mm	**50-160-3**	功率Power: 3kW/50Hz 扬程Max.Head: 32m 流量Max.Flow: 12.5m^3/h 口径Outlet: 50mm	**65-125-3**	功率Power: 3kW/50Hz 扬程Max.Head: 20m 流量Max.Flow: 25m^3/h 口径Outlet: 65mm
80-100-3	功率Power: 3kW/50Hz 扬程Max.Head: 12.5m 流量Max.Flow: 50m^3/h 口径Outlet: 80mm	**40-200-4**	功率Power: 4kW/50Hz 扬程Max.Head: 50m 流量Max.Flow: 6.3m^3/h 口径Outlet: 40mm	**50-200A-4**	功率Power: 4kW/50Hz 扬程Max.Head: 44.5m 流量Max.Flow: 11.7m^3/h 口径Outlet: 50mm
65-160-4	功率Power: 4kW/50Hz 扬程Max.Head: 32m 流量Max.Flow: 25m^3/h 口径Outlet: 65mm	**80-125A-4**	功率Power: 4kW/50Hz 扬程Max.Head: 16m 流量Max.Flow: 44.8m^3/h 口径Outlet: 80mm	**100-100A-4**	功率Power: 4kW/50Hz 扬程Max.Head: 11m 流量Max.Flow: 89m^3/h 口径Outlet: 100mm
40-250A-5.5	功率Power: 5.5kW/50Hz 扬程Max.Head: 70m 流量Max.Flow: 5.9m^3/h 口径Outlet: 40mm	**50-200-5.5**	功率Power: 5.5kW/50Hz 扬程Max.Head: 16m 流量Max.Flow: 12.5m^3/h 口径Outlet: 50mm	**80-125-5.5**	功率Power: 5.5kW/50Hz 扬程Max.Head: 20m 流量Max.Flow: 50m^3/h 口径Outlet: 80mm
100-100-5.5	功率Power: 5.5kW/50Hz 扬程Max.Head: 12.5m 流量Max.Flow: 100m^3/h 口径Outlet: 100mm	**40-250-7.5**	功率Power: 7.5kW/50Hz 扬程Max.Head: 80m 流量Max.Flow: 6.3m^3/h 口径Outlet: 40mm	**50-250A-7.5**	功率Power: 7.5kW/50Hz 扬程Max.Head: 70m 流量Max.Flow: 11.7m^3/h 口径Outlet: 50mm

IRG/ISW 中大型单级立式-卧式冷热水管道泵

型号	功率Power	扬程Max.Head	流量Max.Flow	口径Outlet
65-200-7.5	7.5kW/50Hz	50m	20m^3/h	65mm
80-160-7.5	7.5kW/50Hz	32m	50m^3/h	80mm
100-125A-7.5	7.5kW/50Hz	16m	89m^3/h	100mm
50-250-11	11kW/50Hz	80m	12.5m^3/h	50mm
65-250A-11	11kW/50Hz	70m	24m^3/h	65mm
80-200A-11	11kW/50Hz	44m	47m^3/h	80mm
100-125-11	11kW/50Hz	20m	100m^3/h	100mm
65-250-15	15kW/50Hz	80m	25m^3/h	65mm
80-200-15	15kW/50Hz	50m	50m^3/h	80mm
100-160-15	15kW/50Hz	32m	100m^3/h	100mm
80-250A-18.5	18.5kW/50Hz	70m	47m^3/h	80mm
100-200A-18.5	18.5kW/50Hz	44m	94m^3/h	100mm
80-250-22	22kW/50Hz	80m	50m^3/h	80mm
100-200-22	22kW/50Hz	50m	100m^3/h	100mm
150-160-22	22kW/50Hz	32m	160m^3/h	150mm
100-200I-37	37kW/50Hz	50m	160m^3/h	100mm

SGR

SMALL SINGLE STAGE VERTICAL ALUMINUM CASING PIPELINE PUMP SERIES

SGR 小型单级立式铝壳管道泵

型号	功率Power	扬程Max.Head	流量Max.Flow	口径Outlet	频率Frequency
32SGR3-10-0.37	0.37kW	10m	3m^3/h	32mm	50Hz/60Hz
32SGR3-20-0.55	0.55kW	20m	3m^3/h	32mm	50Hz/60Hz
40SGR5-15-0.55	0.55kW	15m	5m^3/h	40mm	50Hz/60Hz
40SGR6-20-0.75	0.75kW	20m	6m^3/h	40mm	50Hz/60Hz
50SGR10-15-0.75	0.75kW	15m	10m^3/h	50mm	50Hz/60Hz



BZ

SELF PRIMING HORIZONTAL CENTRIFUGAL PIPELINE PUMP SERIES

BZ 自吸卧式离心管道泵

型号	功率Power	电压Voltage	扬程Max.Head	流量Max.Flow	口径Outlet
40BZ-20-1.5	1.5kW	220V	20m	10m^3/h	40mm
40BZ-20-1.5	1.5kW	380V	20m	10m^3/h	40mm
50BZ-25-2.2	2.2kW	380V	25m	10m^3/h	50mm
50BZ-32-3	3kW	380V	32m	10m^3/h	50mm
50BZ-35-4	4kW	380V	35m	14m^3/h	50mm
50BZ-50-5.5	5.5kW	380V	55m	20m^3/h	50mm
65BZ-15-2.2	2.2kW	380V	15m	25m^3/h	65mm
65BZ-20-3	3kW	380V	20m	25m^3/h	65mm
65BZ-30-4	4kW	380V	30m	20m^3/h	50mm
65BZ-40-5.5	5.5kW	380V	40m	25m^3/h	65mm
80BZ-30-7.5	7.5kW	380V	30m	50m^3/h	80mm
100BZ-20-7.5	7.5kW	380V	20m	100m^3/h	100mm
80BZ-50-11	11kW	380V	44m	47m^3/h	80mm
100BZ-32-15	15kW	380V	32m	100m^3/h	100mm
100BZ-50-22	22kW	380V	50m	100m^3/h	100mm



ZW

SELF PRIMING HORIZONTAL CENTRIFUGAL PIPELINE PUMP SERIES

ZW 自吸卧式离心管道泵

型号	功率Power	电压Voltage	扬程Max.Head	流量Max.Flow	口径Outlet
40ZW-8-15	1.5kW	380V	15m	8m^3/h	65mm
50ZW-10-20	2.2kW	380V	20m	10m^3/h	50mm
50ZW-15-30	3kW	380V	30m	15m^3/h	50mm
65ZW-30-18	4kW	380V	18m	30m^3/h	50mm
65ZW-20-30	5.5kW	380V	30m	20m^3/h	65mm
65ZW-40-50	11kW	380V	50m	40m^3/h	100mm
80ZW-40-16	4kW	380V	16m	40m^3/h	65mm
80ZW-50-20	5.5kW	380V	20m	50m^3/h	65mm
80ZW-65-25	7.5kW	380V	25m	65m^3/h	80mm
80ZW-65-55	11kW	380V	55m	65m^3/h	80mm
100ZW-100-15	7.5kW	380V	15m	100m^3/h	100mm
100ZW-100-35	22kW	380V	35m	100m^3/h	100mm
150ZW-180-14	15kW	380V	14m	180m^3/h	150mm